

UNITED STATES BANKRUPTCY COURT  
SOUTHERN DISTRICT OF NEW YORK

-----	-x	
	:	
In re	:	Chapter 11
	:	
DELPHI CORPORATION, <u>et al.</u> ,	:	Case No. 05-44481 (RDD)
	:	
	:	(Jointly Administered)
Debtors.	:	
-----	-x	

## **EXHIBIT H**

### **TO**

### **RESPONSE OF ROBERT BOSCH GmbH TO DEBTORS' THIRD OMNIBUS OBJECTION TO CLAIMS**

§ 1 Scope of EP 757635 B1 Automotive occupant sensor system and method of operation by sensor fusion

Most of today's vehicles use airbags to protect their occupants in case of a severe collision. This protection works only if the passenger fulfills certain criteria. These criteria are, e.g., the occupant's position with regard to the airbag, the type of occupancy etc. If these criteria are not met - e.g. a child standing on the front seat with his hands on the car dashboard - the airbag might do harm rather than save lives. Therefore it is necessary to determine the type of occupancy of the seat, that means the presence or absence of a human or animal occupant, the presence and orientation of child seat (front or rear-facing), an out-of-position occupant or other types of occupancy.

The US 5,482,314A relates to sensor systems and methods of operation for use in automotive interiors to sense the presence, position and type of object in a seat and provide a condition signal for use with other automotive systems, and more particularly in conjunction with air bag activation or other type of safety restraint system for protection of passengers in the event of a collision.

§ 2 What is claimed (e.g. claim 1)

By means of sensor fusion, the presence or absence of a human or animal occupant, the presence and orientation of child seat (front or rear-facing), an out-of-position occupant or other types of occupancy is determined to signal the appropriateness to deploy (or not) the air bag, thereby increasing the reliability and safety of an air bag activation system. This determination is done by comparing the type of occupancy with a stored database.

Depending on this comparison, an airbag will or will not be deactivated.

This method of determining whether or not to de-activate a vehicle's passenger passive restraint system as a function of a current state value determined by comparing measured signal features to a predetermined set of confidence values and empirical relationships obtained by using various known occupancy scenarios and a set of state change criteria, comprises the steps of:

(a) sensing the characteristics of occupancy of a particular passenger seat within the vehicle using a plurality of sensors functionally associated with said passenger seat and developing a set of corresponding electrical signals;

(b) evaluating said electrical signals to determine a plurality of signal features included in each of said signals;

(c) combining certain ones of said signal features to obtain a plurality of fused features;

(d) associating said signal features and said fused features with the confidence values and empirical relationships to determine a feature state value;

(e) identifying the feature state value as the current state value if the set of state change criteria is met; and

(f) generating a de-activate signal if said current state value is one of a predetermined subset of state values for which said passive restraint system is to be de-activated.

§ 3 Indications of infringement by Delphi products

Delphi produces passive occupant detection systems to be installed in various cars (see appendix B, C, D). Delphi describes its passive occupant detection system (appendix E):

The Delphi Passive Occupant Detection System (PODS-B) is designed to classify the occupant seated in the front passenger seat for potential airbag suppression. It consists of a pressure sensor, bladder assembly, belt tension sensor and an electronics control unit (ECU). The sensing system detects loading force on the front passenger seat and classifies the seat as empty or the occupant as an adult or infant/child. The ECU processes the sensor data and provides a deployment-allowed output to the vehicle's sensing and diagnostic module when a defined threshold is met.

How the system works it described in Appendix D


"The system measures the seated weight of the occupant and then turns that weight into a pressure reading," said Joe Garcia, General Motors Airbag Safety Development Engineer, adding, "The pressure reading is sent to the electronic control unit and along with the belt-tension sensor, it determines an overall pressure signal. Based on the overall pressure signal, it determines whether it's above or below an airbag-enabled threshold."

To suppress the airbag, input from the weight-pressure sensor must indicate the weight is at or below the combined mass of a six-year-old child in a booster seat, or the safety-belt sensor must indicate that belt tension is above 15 lb (6.8 kg). An enabled airbag means the pressure sensor, mounted under the passenger seat cushion, must indicate a weight at or above that of a properly seated 108-lb (49-kg), 5th percentile female occupant, and the safety-belt tension sensor must indicate a value below 15 lb (6.8 kg).

Through the use of occupant classification algorithms and signal processing, the vehicle airbag controller is notified to deploy or suppress the passenger airbag. The seat-belt-tension sensor uses an algorithm compensation feature as a means of determining whether a child seat with a tightly cinched seat belt or a person is occupying the seat.

Further description of the technology (appendix F and appendix G) clearly reveals that at least two sensors are used and the signals of the sensors are feed to a software algorithm implemented in a microcontroller.

By comparing the description of the system and how the systems works it is obvious that at least claim 1 is infringed by Delphi products.



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 757 635 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**10.07.2002 Bulletin 2002/28**

(51) Int Cl.7: **B60R 21/32, B60R 22/46,  
B60R 21/26, B60R 25/10,  
B60H 1/00**

(21) Application number: **95917047.3**

(86) International application number:  
**PCT/US95/04780**

(22) Date of filing: **12.04.1995**

(87) International publication number:  
**WO 95/27635 (19.10.1995 Gazette 1995/45)**

(54) **AUTOMOTIVE OCCUPANT SENSOR SYSTEM AND METHOD OF OPERATION BY SENSOR  
FUSION**

**SENSORSYSTEM ZUR ERFASSUNG VON FAHRZEUGINSASSEN UND BETRIEBSVERFAHREN  
UNTER VERWENDUNG VON FUSIONIERTEN SENSORINFORMATIONEN**

**SYSTEME DE DETECTION D'OCCUPATION D'UNE AUTOMOBILE ET PROCEDE PERMETTANT  
SON FONCTIONNEMENT FAISANT APPEL AU FUSIONNEMENT D'INFORMATIONS EMISES PAR  
DES DETECTEURS COMBINES**

(84) Designated Contracting States:  
**DE FR GB SE**

• **BENBOW, Paul, K.**  
**Upland, CA 91786 (US)**

(30) Priority: **12.04.1994 US 227531**

(74) Representative:  
**Behrens, Ralf Holger, Dipl.-Phys. et al**  
**Robert Bosch GmbH**  
**Zentralabteilung Patente**  
**Postfach 30 02 20**  
**70442 Stuttgart (DE)**

(43) Date of publication of application:  
**12.02.1997 Bulletin 1997/07**

(73) Proprietor: **ROBERT BOSCH CORPORATION**  
**Broadview, Illinois 60153 (US)**

(72) Inventors:  
• **CORRADO, Anthony, P.**  
**Upland, CA 91784 (US)**  
• **DECKER, Stephen, W.**  
**La Crescenta, CA 91214 (US)**

(56) References cited:  
**EP-A- 0 402 027 EP-A- 0 738 633**  
**DE-A- 4 023 109 DE-A- 4 112 579**  
**DE-A- 19 610 833 US-A- 5 071 160**  
**US-A- 5 074 583 US-A- 5 118 134**  
**US-A- 5 232 243 US-A- 5 330 226**  
**US-A- 5 413 378**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 757 635 B1**

**EP 0 757 635 B1**

**Description**

**[0001] CROSS-REFERENCE TO RELATED APPLICATION:** This Application is a continuation-in-part application of United States application SN 08/227,531 of the same title filed by us on April 12, 1994.

5 **[0002] FIELD:** This invention relates to automotive occupancy sensor (AOS) systems and methods of operation by sensor fusion to determine the presence and position of an object in a seat, and to classify it by type or nature, to provide an occupancy state or condition signal for use with other automotive control systems, typically in conjunction with air bag activation or other type of safety restraint system for protection of passengers in the event of a collision. A principal embodiment is a multi-sensor US/IR occupant detection unit co-located in the vehicle headliner which provides an occupancy state signal to an air bag controller. The AOS determines by fusion of cross correlated sensor features the presence, absence, orientation and classification of a human or animal occupant, child seat (front or rear-facing), out-of-position occupant, or other types of occupancy, to provide an occupancy state signal to the air bag controller which indicates the appropriateness to deploy (or not) the air bag, thereby increasing the reliability and safety of an air bag activation system.

10 **[0003] BACKGROUND:** Virtually all modern vehicles, autos, vans and trucks have air bag deployment systems. An increasing fraction of the air bag deployment systems currently available include a passenger-side air bag as well as a driver-side air bag.

15 **[0004]** However, a passenger-side air bag deployment system presents problems in regard to criteria for deployment. That is, it is not simply an issue of always deploying a passenger air bag, as injury to occupants can occur by deployment in certain situations. For example, the air bag should deploy only if an occupant is in fact in the passenger seat, and not when the seat is empty. An even more important problem is the danger of deploying a passenger side air bag when it has a rear-facing child seat (RFCS). The deployment of an air bag against the back portion of an RFCS occupied by a child can cause serious injury to the child by catapulting the child into the back of the car seat, thus defeating the safety advantages of both the air bag and the RFCS during a collision.

20 **[0005]** Accordingly, it is very important to provide a means for determining when the passenger seat is occupied and when it is not occupied. It is even more important to determine the classification of the "object" in the seat, including when it is occupied by a child in a RFCS so that such information can be used to prevent deployment of the air bag for an RFCS occupancy state. Any means for determining the nature and status of an occupant, including the presence and orientation of a child seat, must be highly reliable in order to signal selective deployment of the air bag when the seat is occupied by a passenger and prevent deployment of the air bag when the seat is occupied by an RFCS. This is compounded by the fact that there are over thirty-five different infant seats available. The seats are adjustable, and the interior configuration and buckling arrangement of each vehicle is different.

25 **[0006]** Thus, it is no easy task to provide a sensor system, meaning sensor units and methods of operation and signal processing, to reliably detect change of state from an empty to an occupied seat and determine the nature (classify), position (location) and/or orientation of an object or passenger in the vehicle. By way of example, if a thermal sensor is used, its reliability may be reduced by thermal conditions within the vehicle which can change dramatically with the seasons, weather, vehicle interior configuration, rapidly changing exterior shading, passenger clothing and/or size, driver's choice of interior climate, smoking, activity, hot food (e.g., pizza) on the seat, etc. Thus, a thermal sensor acting alone can lead to falsely declared occupant presence, and more importantly, failure to detect the presence of an occupant. Furthermore, there may be cases where the thermal signature of an RFCS blends so well with the seat upholstery that a thermal sensor does not see it, allowing the air bag system to deploy despite the presence of a child-occupied RFCS.

30 **[0007]** Conversely, if one were to use instead distance measurements, such as by the use of acoustic sensors, such sensor must be capable of distinguishing between the presence of an RFCS and the presence of a passenger holding an object, being in a position or making a motion which can result in distance measurements which mimic the presence of an RFCS.

35 **[0008]** There are other scenarios as well that require a sensor system to recognize, classify and signal air bag controllers to take appropriate action, such as an FFCS, inanimate objects, a passenger holding an inanimate object, an out-of-position passenger, and so on.

40 **[0009]** In addition to these basic sensor requirements, the system for determining the presence of a passenger in the passenger seat and the presence or absence of a rear-facing child seat, must be cost effective and must be in a sufficiently small package to prevent interference with normal vehicle operation. Such systems must be compatible with the aesthetics of the vehicle so as not to affect a vehicle's salability particularly as it relates to new passenger cars. Furthermore, the cost of installing such system in the vehicle must remain simple to keep manufacturing cost low. Preferably, all the sensors should be kept in a single unit to ease the assembly of the vehicle in production or retrofitting older vehicles.

45 **[0010]** There is no currently available sensor system known to the Applicants which can reliably distinguish the presence, absence and nature of an object or a passenger in the passenger seat. None today can selectively distinguish

**EP 0 757 635 B1**

the presence or absence of a rear-facing child seat in the passenger seat.

[0011] There is also no currently available sensor system that can account for a wide variety of possible variations in both thermal and distance parameters that are encountered in the actual wide range of circumstances of occupancy, nor one that is sufficiently versatile to be adaptable to the wide range of vehicle interior configurations.

5 [0012] An example of a system for actuating a driver air bag restraint is shown in White et al US-A-5,071,160 (Automotive Systems Laboratory) which employs an ultrasonic acoustic sensor for sensing the position of the driver, a "pyrotechnic" sensor for sensing the presence of the driver, and a pressure transducer within the seat to sense the approximate weight of the driver and an air bag control module to trigger deployment of the air bag. As best understood, when an impending crash is sensed by a crash sensor, a control module samples the sensed position of the passenger  
10 at fixed time intervals to calculate the rate or movement of the passenger relative to the various fixed motion structures of the vehicle. This rate of relative passenger movement is used to corroborate the acceleration data from the crash sensor and ensure deployment of the air bag where the passenger is at substantial risk of injury. That is, the interior passenger acceleration is apparently used to prevent false crash signals from the crash sensor. Crash sensors may trigger air bag deployment during a minor bump in close slow moving traffic or during parking. This "is-the-passenger-being-accelerated-at-the-same-time" system is directed to correcting false crash sensor signals.

15 [0013] This document shows the steps/features (a) and (b) of the method/apparatus according to claims 1 and 33 of the present set of claims.

[0014] The patent describes the desired results but does not detail the process or circuitry to achieve these results beyond stating that the air bag control circuit uses error correction methods such as a plurality of each type of sensors  
20 (crash sensor, pyrotechnic, ultrasonic, acoustic, and pressure transducer) for each assigned monitoring task to prevent falsing. Accordingly, the control circuit is said to employ redundant sensors for each monitoring task and the instructions executed by the control module are said to include error correction subroutines known to one skilled in the art. A dashboard signal lamp can be lit when the air bag effectiveness is too low, or the likelihood of passenger injury by the air bag is greater than the injury if he hit the steering wheel, dash or knee bolster, the latter being consistent with the  
25 slow bump situation described above.

[0015] Accordingly, there is a need in the art for a reliable occupant sensor system for use in conjunction with vehicle air bag deployment systems. There is also a need for a sensor system that can meet the aforementioned requirements for reliability in detecting the presence, absence and classification of an object, a passenger or RFCS in a wide range of circumstances, irrespective of whether a passenger is holding an object and irrespective of the thermal conditions  
30 that may be found in the vehicle. Such a sensor system must also be a cost effective component of the vehicle that does not detract from the aesthetics of the vehicle interior or unduly increase the cost of manufacturing or assembling a vehicle.

**THE INVENTION**

35 [0016] **OBJECTS:** It is an object of the present invention to provide an automotive occupancy sensor system to reliably detect the presence or absence of a passenger in the passenger seat and the presence or absence of a rear-facing child seat in the passenger seat and to provide an occupancy state signal to the air bag control system to permit it to either inhibit or deploy a passenger side air bag during a collision.

40 [0017] It is another object of the invention to provide a vehicle passenger sensing system which relies upon multiple sensors with cross correlation of features from different physical phenomena to provide signals which are processed by sensor fusion to significantly enhance the reliability of passenger detection while permitting the use of relatively low cost conventional sensors.

45 [0018] It is another object of the invention to provide a vehicle occupancy sensing system adapted for use with a passenger seat of a vehicle to control the deployment of an air bag, and specifically to provide an occupancy state signal that permits controlling, including inhibiting, the deployment of an air bag when a passenger seat is classified as unoccupied, occupied by inanimate objects, the occupant is out-of-position, or when an RFCS is present in the passenger seat, in order to prevent unneeded or unsafe deployment which might otherwise cause injury.

50 [0019] It is another object of the invention to provide a passenger occupancy sensor system which utilizes both thermal and acoustic sensors, the signals from which are processed in a fusing algorithm to produce an output signal indicative of the state and classification of occupancy, which signal can be used in an air bag control system to permit deployment of a passenger side air bag only when the passenger seat is occupied by a passenger properly positioned in the seat and inhibiting deployment of an air bag in other preselected conditions of occupancy.

55 [0020] It is another object of the invention to provide a multiple sensor occupancy detection system which processes by sensor fusion certain preselected features extracted from signals provided by different sensors which sense different physical parameters and correlate them to increase the reliability of the individual sensing characteristics of the individual sensors.

[0021] It is another object of the invention to provide a multiple sensor occupancy detection system while maintaining

**EP 0 757 635 B1**

low cost in manufacturing of the vehicle by locating multiple sensors co-located in a single unit to ease the task of mounting the sensor system to the vehicle.

[0022] It is another object of the present invention to provide a multiple sensor occupancy detection system while maintaining aesthetics of the vehicle by producing a sensor system of minimal size.

5 [0023] It is another object of the invention to provide a sensor system that can be tuned to individual vehicle interior configurations with unparalleled precision of discrimination by sensor fusion signal processing to produce state, condition or decision signals that may be used as input to a wide variety of automotive systems, including but not limited to occupant safety, vehicle integrity and safety, vehicle operating systems condition or position (e.g. seat position and load adjusting systems), unusual conditions, interior temperature control, unauthorized entry (Passive Theft Deterren-  
10 cy), near object detection systems, and the like.

[0024] Still other objects will be evident from a review of the Summary, Drawings, Detailed Description and Claims.

[0025] **BRIEF DESCRIPTION OF DRAWINGS:** The invention is illustrated in the drawings in which:

15 **FIGs. 1-8** show various conditions illustrative of some of the variety and range of real conditions that must be detected and accurately discriminated-amongst (classified) by a fully-functional automotive occupant sensor system which, by way of example, is focused on a passenger seat of a vehicle, with: **FIG. 1** showing the seat being occupied by a passenger; **FIG. 2** showing the passenger seat unoccupied and sensed as "empty"; **FIG. 3** showing a child in a rear-facing child seat ("RFCS"); **FIG. 4** showing a passenger holding a bag of groceries; **FIG. 5** showing a child in a forward-facing child seat ("FFCS"); **FIG. 6** showing a dog in the seat; **FIG. 7** showing an out-of-position passenger ("OOP"); and **FIG. 8** showing a moderate sized package on the seat;

20 **FIG. 9A** is an enlarged front view of the sensor taken along line 9-9 of **Fig 2** having a multi-element infrared sensor and an ultrasound sensor contained in a single unit, and illustrating a multi-element Fresnel lens system over a co-located dual-detector infrared sensor;

**FIG. 9b** is a longitudinal section view of the IR sensor taken along line 9B-9B of **FIG. 9A**;

25 **FIG. 9C** is a transverse section view of the IR sensor taken along line 9C-9C of **FIG. 9A**;

**FIG. 10** is a view of the passenger seat and the sensor unit in relative relationship, illustrating the infrared detector zoning of the seat and seat back areas as sensed through the Fresnel lens;

**FIG. 11a** is a side view illustrating the Infrared detectors fields of view coverage on the passenger seat;

**FIG. 11b** is a side view illustrating a typical ultrasound transducer field of view coverage on the passenger seat;

30 **FIG. 12** is a schematic diagram of the electronic circuit of an embodiment of the sensor system of the present invention;

**FIG. 13** is a functional block diagram of an application specific integrated chip ("ASIC") means for carrying out the sensor fusion methods of the present invention;

35 **FIG. 14** is a signal processor functional block diagram illustrating the processing steps used in the operation of the presently preferred best mode embodiment of the sensor system of the present invention;

**FIGs. 15a** and **15b** are feature processing block diagrams showing the steps of processing raw data from the sensors to produce infrared (**FIG. 15a**) and ultrasound (**FIG. 15b**) feature vectors;

**FIG. 16** is a fused feature processing block diagram illustrating the process of fusing infrared features and ultrasound features to produce a fused feature vector;

40 **FIG. 17** is a detection processing block diagram showing the processing of the infrared feature vector, ultrasound feature vector, and fused feature vector to produce state;

**FIG. 18** is a graph illustrating the relationship between a feature vector component and confidence levels of various occupancy states by way of example: OOP state, RFCS state, inanimate object state, occupant state, and empty state;

45 **FIG. 19** is a graph illustrating the progression of confidence levels for a given state and a given feature vector component over time;

**FIG. 20** is a graph showing confidence level upon fusion of two feature vector components;

**FIG. 21** is a graphically illustrated matrix of the relationship between vector components, and fused vector components, states, and confidence levels; and

50 **FIG. 22** is decision processing block diagram illustrating factors considered in a state change decision process.

**FIG. 23** is a diagram of sensor decision reliability in a case of discriminating between (classification of) a normal occupant and an RFCS;

**FIG. 24a** shows a signature trace from an automobile;

**FIG. 24b** shows the physical layout of the vehicle giving the trace of **FIG. 24a**;

55 **FIG. 25a** shows a signature trace from a truck;

**FIG. 25b** shows the physical layout of the vehicle giving the trace of **FIG. 25a**;

**FIG. 26** is a table of test data from actual testing of a sensor system of the invention;

**FIGs. 27a** and **27b** are comparative traces showing sensibility of the discrimination between an RFCS and the

EP 0 757 635 B1

same RFCS covered with two blankets; and

**FIG. 28** is an isometric view of a presently preferred embodiment of the AOS unit having co-located sensors, three US and 2 IR inset in off-axis tapered bore-holes to accommodate their respective views.

5 **[0026] SUMMARY:** The present invention is directed to an automotive interior occupant sensor system employing sensor-fusion signal processing which combines information provided by two or more sensors, each of which "sees" the world in an unique sense. The multi-sensor fusing process of this invention greatly enhances performance and reliability. In much the same way as human ability to visually distinguish and classify objects is greatly enhanced with the addition of sound. While the invention is described in detail with respect to sensing the presence (or absence) of  
10 a variety of seat occupants for the purpose of sending an occupancy state signal to an air bag deployment control system, thus permitting it to enable or disable the air bag system to permit or prevent deployment in preselected situations, the "decision" or state signal produced by the sensor system apparatus and sensor signal fusion method of this invention may be applied to also, or alternately, check, affect or trigger other systems, such as automatic safety belts, seat positioning systems, interior climate controls, lighting, dashboard or other signal or warning lights, audio alert or status signals (buzzers, recordings, or synthesized voices), door locks, load adjusting systems, reminder systems, crash conditions recording systems, and the like.

**[0027]** In a preferred embodiment, the automobile passenger seat occupancy sensor of the present invention relies on two detectable properties: One such property is the thermal signature and associated motion, and the second is the acoustic distance and the associated acoustic motion. By relying on a plurality of two distinct types of sensors in  
20 which a plurality of independent features (or characteristics) are extracted and cross-correlated, and fusing some of these features, the accuracy and reliability of sensing is vastly improved as compared to single sensor or even multiple sensors not employing sensor fusion. For example, in cases where the thermal signature of a rear-facing child seat blends with seat upholstery and provides no motion signal, the distance measurement may be able to detect that something is in the seat with suitable reliability. However, in cases where passengers are holding objects or are much  
25 larger than normal, an ultrasonic sensor will provide ambiguous distance measurements which "look" like an RFCS. By the fusion method of this invention, combining features extracted from IR detectors angled and zoned to "look" at different fields and from an ultrasound sensor can ensure proper identification and output of an appropriate decision signal.

**[0028]** In accord with the present invention, measurements of conditions are taken continuously and compared to prior conditions to provide a current state profile. At least initially, the updates are compared to initial conditions obtained at the start-up of the vehicle, and later the comparison is with prior state conditions. If initial conditions indicate a recognized (or "valid") occupant classification, this condition will tend to prevail throughout operation of the vehicle with the sensor algorithm always erring on the side of safety. If initial conditions indicate an empty seat, a "wake up" mode ensures that passengers changing seats during vehicle operation are detected. A standby mode while ignition  
35 is off may be provided in order to draw less power and perform only the minimum required periodic checks and maintenance functions.

**[0029]** Individual sensors will make incorrect decisions by themselves under certain conditions but in unrelated, non-overlapping ways. The fused sensor approach of the present invention covers these failure modes to assure reliable performance by requiring analysis of many different signal features before making a recognition decision. Ordinarily,  
40 to compensate for its own area of marginal performance, an individual sensor must become more and more sophisticated, driving up costs. In contrast, the system of the present invention employs fused data from two or more inexpensive sensors, preferably three ultrasound (US) and two infrared (IR) sensors, thus achieving the required sophistication level, yet at a significantly reduced cost. Further, in dual sensor type operation, self-diagnosis is enhanced by cross-correlating data from one sensor with data from the other. Correlation/cross-correlation involves comparison of time of occurrence, location, direction of motion, magnitude of sensed event, rate of change and the like, and includes  
45 correlation of same features sensed by same or different sensors or different types of sensors, and correlation of different types of features from different sensors or types of sensors.

**[0030]** Although the preferred embodiment of the present invention utilizes passive thermal and active acoustic sensing for their inherent design, simplicity, and safety features, it will be understood that the present invention is not necessarily limited to the use of multiple sensors of the particular type disclosed. While the selected sensors are non-radiative and present no electromagnetic, electro-optic exposure or other exposure hazards to the occupants, it will be understood that other combinations of two or more sensors of different types for occupancy sensing can be readily used to achieve the simplicity and yet high reliability, of the present invention by the sensor fusion method of the present invention. In any case, the sensors disclosed herein do not present any exposure hazards to occupants; for example  
50 the ultrasonic unit operates at a frequency well above the hearing range of humans and dogs.

**[0031]** It should be understood that the present invention is not necessarily limited to use in conjunction with an air bag system. It can also be used for security and safety purposes because the combination of two distinct sensor characteristics such as the combination of thermal contrast and motion with acoustic distance and motion as shown



**EP 0 757 635 B1**

herein, prove highly advantageous for its reliability and simplicity in a number of applications outside a vehicle as well as other applications with a vehicle. It may be used as a security system for property, both inside and outside a building.

**[0032]** In the preferred embodiment of the invention, two infrared sensor units and three ultrasonic sensor unit inputs are combined in a microprocessor circuit by means of a sensor fusion algorithm to produce an output occupancy state signal to the air bag controller. The signal results from preselected confidence weighting for the various parameters extracted from the two sensors (called features), and upon a fusion process which ultimately makes a decision which is extremely reliable. An empirical profile, in the form of a lookup table, a matrix of values, empirical relationship(s), or an algorithm is provided for a plurality of known objects (e.g. human occupant, empty seat, rear and forward facing child seat, animal, packages, etc.) either as a generic interior profile, or as a developed (empirically determined) profile for a particular interior. During operation, the fusion processing compares the signals to a matrix of known condition confidence values to produce a set of confidence weighted values. By way of example, some 14 selected IR features and 13 selected ultrasound features are compared either directly or after fusion to arrive at an overall confidence level signal that results in the air bag deployment control triggering the air bag enable/disable signal (or absence of signal). The output signals are compatible with AECM interfaces.

**[0033]** The IR sensor unit advantageously includes dual detection elements (typically each with six active segments) that look at different areas of the seat, e.g. the seat back and the seat itself. In addition, the "view" of these sensor elements are zoned into vertically oriented parallel zones by means of one or more Fresnel-type lenses so that "thermal motion" features can be extracted from the change in thermal signatures from zone to zone.

**[0034]** The occupant sensor algorithm performs the sensor fusion matrix processing and decision making operation on the selected sensor outputs. The fusion matrix has inputs weighted to guarantee reliability in the decision making process. All sensor outputs along with empirical "known" condition or/and configuration data, calibration data, initial conditions and updated historical reference data are considered in the process of making a decision (outputting an occupancy state signal) to the air bag controller whether or not to suppress (enable or disable) the deployment of the passenger-side air bag in a collision. By fusing the features and feature vectors to make the decision, each individual parameter has only a partial effect, or "vote", on the ultimate fusion decision. The final decision is based on several conditions or states reinforcing that decision by requiring several independent phenomena or aspects thereof to occur simultaneously.

**[0035]** The fusion process of the invention produces decision with a higher reliability than a single phenomena sensor or non-fused multiple sensors. In addition to performing the multi-sensor fusion decision making, the process requires periodic analysis of the sensor outputs to make certain that all sensors are functioning properly. In addition to normal electrical condition checks, conditions from each sensor output are compared with the output from the other sensor to be sure that all sensors confirm proper operation. In the unlikely scenario where the sensor system fails entirely due to power failure, component failure, or otherwise, the air bag deployment system controller defaults to deployment condition to ensure passenger safety. A diagnostic warning indicator of a failure condition may be provided to the vehicle's indicator panel.

**[0036]** All the sensors of the present invention are preferably co-located and provided in a single unit at the juncture of the windshield top with the forward end of the headliner to maintain low manufacturing cost and simplify the task of assembling the sensor system to a new vehicle or retrofit it to a previously-assembled vehicle. In addition, the aesthetics of the vehicle is maintained by keeping the sensor system unit to a minimal size. Further, because of cross-correlation of sensor inputs and sensor fusion, it is not necessary to separate the US from the IR, e.g., it is not necessary to put the US in the dash and the IR rearwardly, overhead of the passenger.

**[0037]** Having two or more sensors in the fusion mode enhances self-diagnostic correlation between the two, for if there is a failure of one but not the other, even in scenarios where no or little signal is expected from the failed sensor, still some of the expected features will be missing and analysis and fusion will identify the failed sensor. For example, if US indicates an occupant, the IR can be polled. If it indicates no occupant, then a potential sensor malfunction is indicated. If there are some features from the IR, say weak signal IR, then the IR may be working but it is not clear what is in the seat until other polled features are analyzed by the fusion process algorithm of the invention.

**[0038]** While a fixed sensor system with angled lenses (for the IR) are shown, a mechanical sweep scan can be employed by mounting one or more sensors on a moving element. Likewise while a fixed US transducer and receiver is shown using pulsing to toggle or poll the sensor, a separate transducer and receiver may be employed. The acoustic signal profile may be shaped to the interior for maximum or narrowly focused coverage in a specific area.

**[0039]** The IR sensor may be an uncooled electric device that responds to IR radiation from the near to far IR (2-12 micrometers wavelength), and the US may be an electrostatic type sensor with a typical frequency range of 40 KHz to 150 KHz. The typical field of view will be approximately 30° x 34° for the IR, and 20° to 30° (conical direct or offset) for the US. The US is highly immune to interference because the pulse echo must be received within a preselected time window to be valid. The US beam may be asymmetric for better coverage. A separate IR sensor can be added to the unit oriented to look at the center (middle) passenger location.

**[0040]** Without additional hardware, the system of the invention can automatically cycle "on" to measure the interior

EP 0 757 635 B1

temperature of the vehicle in which it is installed and send a signal to automatically adjust or cause the cooling fan to operate whenever the interior temperature exceeds a preselected (design selected) maximum value. Additionally, the system can automatically, at "power up", measure the characteristic interior "signature" of the particular vehicle in which it is installed, and by comparing these values to predetermined reference tables imbedded in the ASIC, determine which type of platform it is installed in, e.g., auto or truck. It can then transmit the vehicle identification type to the body controller thus automatically verifying correct and proper functioning at the final installation/assembly point.

[0041] The ASIC of this invention permits several additional features to be optionally incorporated into the sensor system of this invention as desired. These include: 1) Center Passenger Occupant Detection (CPOD) employing an additional IR sensor and lens to detect center seat occupancy; 2) Four Quadrant Temperature Control (FQTC). This system replaces presently-used sun sensor and environmental control unit. It not only controls the vehicular interior temperature, but also enables automatic selection and control from one to four quadrants of directed HVAC (permitting up to four individual interior temperature settings); 3) Passive Theft Deterency (PTD). The automatic temperature control sensors can be used to detect the presence of a person in the vehicle and through communication with the body controller can decide if entry was proper or not, i.e. was a key used to gain entry (proper) or not (improper entry); 4) Near Object Detection Sensors (NODS). This system utilizes an extremely low power microwave radar which can be mounted behind a plastic cover (taillight or bumper), and tailored to detect objects within a preselected field-of-view.

[0042] The FQTC is similar to the occupant sensor, and uses a "multi-apertured" lens to facilitate motion detection. Further, the sensors are effectively "multiplexed" into the central network processor where sample timing, duty cycle, and sensor select sequence are all programmable.

[0043] PTD employs thermistor bolometer (TB) detectors, instead of pyro-electrics, and is thus capable of sensing both the motion of a warm object as well as being able to determine its approximate temperature. This PTD implementation is electronically configured to provide continuous or selected intermittent vehicle monitoring. The electronics (Signal Conditioner, Power Regulator, Motion Sense Logic, etc. ) are configured for extremely low (less than 100 microamps) current drain on the vehicle's battery during security "system on" status, such as when the vehicle is unattended with the ignition off. This configuration permits active temperature monitoring of each zone while the automobile is in use. Further, when the vehicle is left unattended, the sensor suite is capable of detecting and reporting unwanted intrusion associated with vehicular theft or possibly a person hiding in the rear seat area.

[0044] NODS utilizes microwave (impulse) radar rather than the classical IR and Acoustic sensing, but employs sensor fusion as disclosed herein. Microwave radar is employed due to its ability to operate (invisibly) while protected from an exterior hostile environment by mounting it in a bumper or tail light assembly location. This system possesses a reliable range detection of on the order of 15+ feet. The hardware concept incorporates voltage protection, J1850 Bus interfacing and one or more ASIC(s) for control and algorithm implementation in accord with the principles of the invention. The specific frequency employed is in the range of from about 1.7 to 94 GHz.

[0045] The sensor system and methods of the invention key on the following properties: Thermal signatures or contrasts coupled with motion to establish the presence of a warm object; and Acoustic signatures via wave propagation coupled with motion to establish object status, i.e. the distance from dashboard or headliner location of occupants, objects, empty seat, etc. and if animated or stationary.

[0046] Both sensor properties are required to meet the reliability requirements because: 1) The need to inhibit the air bag when a rear-facing child seat is more reliably accomplished through dimensional measurements; these are more reliably derived from the acoustic sensor. 2) Thermal conditions within a vehicle change dramatically with seasons, weather, vehicle interior, passenger clothing, and driver use. Using an IR sensor only may lead to higher rate of falsely-declared seat status condition and, more importantly, the failure to detect an occupant present. 3) The self diagnostic capability of the system requires sensor interaction/confirmation to enhance it's reliability.

[0047] The signal processing employed in the multi-sensor fusion of this invention is preferably implemented in one or more Application Specific Integrated Circuits (ASIC). In addition to the signal processor ASIC, a micro-controller provides additional decision making power and system control functions. The ASIC is a mixed signal analog (A) and digital (D) device, and may be a single combined A&D device, or the A and D functions in separate chips. It performs signal conditioning, sensor signal detection, non-volatile storage, bus interface, status signal interface, and clock generation functions. The confidence weighting and fusion matrix parameter processing is conveniently performed in software running on the micro-controller or can be implemented using hard-wired logic circuitry. The software can be implemented by one skilled in the art following the Figures as described in detail herein.

[0048] DETAILED DESCRIPTION OF THE BEST MODE: The following detailed description illustrates the invention by way of example, not by way of limitation of the principles of the invention. This description will clearly enable one skilled in the art to make and use the invention, and describes several embodiments, adaptations, variations, alternatives and uses of the invention, including what we presently believe is the best mode of carrying out the invention.

[0049] Referring now to the accompanying drawings, FIGs. 1 through 7 illustrate a variety of occupancy scenarios to which the present invention is generally directed in its preferred automotive occupancy sensing embodiment. As shown in FIG. 1, this embodiment of the invention comprises a sensor suite 1 mounted in the overhead area above

**EP 0 757 635 B1**

and slightly to the center of the passenger seat 12 of the vehicle 14. As described in more detail below, the microprocessor controller, including an ASIC having the firmware described herein is conveniently located in the sensor unit assembly 1 mounted in the headliner 16 or dash 28. The sensor unit 1 is connected to a conventional air bag controller 2, which in turn activates an air bag 4 in an appropriate crash-sensed situation. The system is conveniently powered by the auto battery 6, or alternately by the alternator or a separate trickle-charged cell (not shown).

**[0050]** Various possible scenarios are represented by way of example in the following figures. FIG. 1 depicts the passenger seat 12 occupied by an average adult person 8, while FIG. 2 depicts an empty seat. FIG. 3 depicts the presence of a child 10 in a rear-facing child seat (RFCS) 11 mounted on the passenger seat 12. The RFCS will have an unusual thermal pattern as well as distance and vibration signatures due to the possibility that the child may in part be obscured by the seat, thus masking natural thermal radiation. FIG. 4 depicts an adult person holding a bag of groceries 18, which will also have unusual sensor readings. FIG. 5 shows the presence of a child 10 in a forward-facing child seat (FFCS) 20. Unlike the RFCS, this FFCS scenario will have a more nearly normal thermal signature for a small child as well as normal motion and distance readings. FIG. 6 shows the presence of a pet such as a dog 13. Depending on the size and activity of the pet, there will be variation in the thermal, motion, and distance readings and the rate of change thereof. FIG. 7 depicts an illustrative out-of-position (OOP) passenger scenario, where a child 10 is standing up on the passenger seat and holding onto or leaning against the dash board. It could also be a passenger adjusting the radio, or looking out of the front windshield or with his legs or feet up on the dash. In this scenario, the sensor system needs to determine the feasibility of deploying the air bag which depends on the distance of the passenger to the location of the air bag. If the passenger is too close to the air bag location, air bag deployment may not serve any useful purpose, and indeed might injure the occupant in the process.

**[0051]** The sensors unit is advantageously located in the front of the headliner. Comparing for example, FIGs. 3 and 7, if the sensors are located at position X and/or Y as compared to the more universal, wide-angled headliner/windshield intersection position 16 of this invention, the RFCS 11 or OOP occupant 15 may obscure or overload one or more of the sensors by coming in contact with the sensor unit face or being too close to it. This is also an argument for co-location of sensors.

**[0052]** The seat may also be occupied by passengers of different size, such as a small child or a larger person. An occupant may be reclined in the passenger seat or sleeping in the passenger seat without giving off much movement, and both cases will have unusual motion, distance, and thermal signature. Referring to FIG. 8, there may be inanimate objects 17 of various size on the seat which may or may not give off thermal and/or motion signatures. An example of scenarios giving rise to extraneous or false signals include: hot pizza box, warm baby bottle, or cold drink can or frozen food.

**[0053]** In addition to these scenarios, the weather and shading conditions may affect the interior environment of the vehicle, especially the interior temperature of the vehicle. On a hot summer day, the passenger seat will be extremely hot after the vehicle has been sitting closed in the sun, and this condition can affect sensor readings. In addition, driving along a tree lined highway can lead to thermal flicker, which could mimic a motion signature, due to intermittent shading and exposure of the seat. The present invention is not limited to the detection of the above-discussed scenarios, as others can be detected as well.

**[0054]** Given this wide variety of occupant and external and internal conditions, the present invention must be able to detect, discriminate (categorize) and make a decision to directly or indirectly, via an occupancy state signal, permit transmission of an air bag enable signal, or generate a disable signal to the air bag controller to maximize passenger safety in the event of a collision. In the preferred embodiment of the present invention, these scenarios are categorized into one of the following five Occupancy States: Empty state (negative or "E" state), Occupant ("O" state), Inanimate Object ("IO") state, Rear-Facing Child Seat ("RFCS") state, and Occupant Out-Of-Position ("OOP") state. For the detected Empty state, IO state, RFCS state, and OOP state, an air bag disable state signal will be sent or supplied to the air bag controller. For the Occupant state, an enable air bag state signal will be supplied to the air bag controller or, in the event that the default condition of the air bag controller is to signal the air bag to deploy, no interrupt state signal will be sent from the sensor unit to the air bag controller (or air bag). Other embodiments may include more or fewer states with variation in the scenarios.

**[0055]** The Occupant state is the state where air bag deployment will enhance the safety of a passenger in case of an accident. The Occupant state includes the scenarios of an average adult person, a small child, a child in a forward facing child seat, a passenger holding a bag of groceries, a standing child in some positions, and the like. Note that in the standing child scenario, the air bag will be deployed if the child is sufficiently far away from the air bag deployment location to allow an effective and non-injurious deployment of the air bag. The air bag will not be deployed if the child is too close to the air bag deployment location, since deployment of the air bag might injure the child by knocking it back into the seat. The same consideration applies to the OOP state, a passenger positioned too close to an air bag can be sensed to prevent an injuring deployment. Alternately, a state signal conveying "deploy slowly" or "inflate partially" information may be sent to the air bag controller which can selectively deploy one or more bags with a less than full charge, or rapid or slow inflation characteristics, e.g., "hard" vs. "soft inflation" of single or multiple air bags.

EP 0 757 635 B1

[0056] Typically, it is desirable to disable the air bag in the RFCS state, the Empty state, the OOP state, and the IO state, e.g. by sending an interrupt state signal or interrupting the deploy signal from the air bag controller. It is especially important in the RFCS scenario that the air bag is not deployed in case of an accident. A deploying air bag striking the back of a rear facing child seat could catapult the child and seat backward, possibly injuring the child in the process. In the case of an Empty state or IO state, deploying the air bag in case of an accident ordinarily does not serve any useful purpose, and only adds to the repair cost of re-installing a new air bag in the vehicle. However, the system of the invention is biased toward deployment to ensure the highest level of safety and reliability.

[0057] In the preferred embodiment of the invention, the air bag controller is designed to default to the air bag deployment condition. For the appropriate states, such as the Empty state, the IO state, the RFCS state, and the OOP state, the sensor system sends a disable or interrupt state signal to the air bag controller. The present invention is also adaptable for use with a multi-canister controlled pressure air bag deployment system where the air bag is inflated by a number of canisters to the desired pressure. With this system, instead of sending an "on" or "off" type of signal, a quantitative serial, or multiple parallel type of signal can be transmitted to the air bag controller to indicate the desired pressure, or the number of canisters to release depending on the sensed state.

[0058] In order to recognize the various scenarios and conditions, this embodiment utilizes two types of sensors, an infrared ("IR") sensor and an ultrasound ("US") sensor. The infrared sensor unit used in this embodiment is a commercially available thermistor type of infrared sensor unit, and there are preferably two or more detector elements, each having up to six segments, contained within the infrared sensor unit to allow sensor detection in or from two different regions. Although pyro-electric and photovoltaic types of infrared sensors may be used as well, the thermistor type of sensor presently provides the best cost/performance ratio. In the presently preferred embodiment, the infrared detectors sense the targeted areas continuously with an interrogation period of between about 2 Hz and 10z.

[0059] The ultrasound sensor used in this embodiment is a commercially available ultrasound sensor circuit package where the ultrasound frequency and pulse can be externally controlled. The sensor operates in the ultrasonic range above the hearing range of humans and animals such as dogs, and the typical frequency ranges are from 40 KHz to 150 KHz. Frequency selection is determined by requirements such as acoustic losses, range, power, cost, and transducer size. For example, air attenuation and absorption by seats and clothing are increased with frequency; however, the required sensing range here is short, and as a result, the higher end of the frequency range can be selected. The higher frequency also provides the advantage that a small transducer head (sensing element) can be used. In the presently preferred embodiment, the interrogation period varies between 2 Hz and 20 Hz during actual operation depending on the amount or quality of information needed. A suite of three US sensors are preferred, co-located in a single unit at the headliner position of FIG. 1.

[0060] FIGs. 9A-9C are enlarged views of the sensor unit of the present invention shown in place in headliner 16 of FIG. 1. The sensors may be placed separately at different locations, but in the preferred embodiment, as shown in FIG. 9A, the infrared sensor suite 24 and the ultrasound sensor suite 26 are placed next to each other in a single unit 22. The infrared sensor preferably has two or more detectors 21a, 21b separated by a vertical baffle 19 and covered by a multi-element Fresnel lens 23. Each detector 21a (D-1) and 21b (D-2) views different positions of the seat, 21a looking at seat back area 12b, and 21b looking at seat area 12a (see FIG. 10), through, in this example, two rows of Fresnel lens elements, FLa and FLb, which form a lens set LS-1 and LS-2 respectively. Each row in this example has six individual lens elements 50a, 50b...50n, which look at the corresponding zones 50a, 50b...50n on the seat as seen in FIG. 10. The fields of view of the lens row FLa overlaps the row FLb, but the individual zones 50a in 50n do not overlap. The baffle 19 is generally aimed at the seat belt when worn properly by the passenger, as shown by arrow Q in FIG. 9B.

[0061] FIG. 9B is a longitudinal schematic cross section of the IR sensor 24 along line 9B-9B in with respect to the horizontal angle  $\theta$  can be 0° it preferably ranges from about 5-45° with 10-30° being preferred. FIG. 9C is 24 taken along line 9C-9C of FIG. 9A. It shows the generally faceted orientation 50a...50b. In the alternative, the elements may be stepped with respect to each other.

[0062] The Fresnel lens allows the signal strength of a signal source from the middle of the zones to fully pass through. However, as the signal source moves toward the edges of the zones, the Fresnel lens proportionally reduces the strength of the signal passing through.

[0063] Although these sensor units can be placed in a number of places in the vehicle, it is preferred to be placed in the headliner 16 above the passenger seat at the juncture of the top of the windshield with the forward end of the headliner as seen in FIG.1. The sensor unit can also be placed on the dash board directly in front of the passenger seat or on the passenger side A-pillar. It is anticipated that in the future, rear passenger seats may be equipped with air bag protection as well. In this case, a sensor unit placed forward and above the targeted passenger seat in the headliner or in the B pillar can be used to sense rear seat occupancy.

[0064] FIG. 10 is a top view of the passenger seat 12 and the sensor unit 1. The passenger seat has a back area 12b and a seat area 12a. Each area (back and seat) is sensed in multiple zones 50a, 50b...50n created by the Fresnel lens elements of the infrared sensor as shown in FIGs. 9A-9C. Note that the infrared sensor uses a Fresnel lens of

EP 0 757 635 B1

the type in which each of the infrared detector field of view is divided into, for example, five to eight zones. The infrared detector converts photons (heat) into a change in conductance of the detector which results in a sinusoidal wave voltage when an object laterally crosses each zone.

5 [0065] FIG. 11a illustrates a side view of the orientation of the two detectors 21a, 21b (FIG. 9) of the infrared sensor, looking at the passenger seat 12. One detector 21b is oriented to view the seating area 12a while the other detector 21a views the back 12b of the seat. In addition to receiving zoned thermal signature data, each infrared detector senses lateral motion of the occupant or object crossing the zones 50a...50n in its designated area 12a or 12b of the passenger seat. By combining data from the two infrared detectors, "longitudinal" motion of the passenger can be determined as well. By "longitudinal" motion is meant motion by a passenger (e.g. a passenger's hand) that crosses from the area  
10 detected by one detector to the area detected by the other detector, and includes both fore/aft or front/back (with respect to the vehicle) motion and vertical or up/down motion, or compound motion having both fore/aft and vertical components. FIG. 11b depicts the area scanned by the ultrasound sensor 25 when aimed at the seat, and portions of the floor and dash 28.

[0066] Referring now to the hardware aspects, FIG.12 illustrates a circuit schematic for the preferred embodiment of the present invention. An application specific integrated circuit ("ASIC"), 30, is designed to receive data from the  
15 infrared detector suite assembly 24 (S1) and the ultrasound detector suite 26 (S2). The ASIC processes the data by controlling a commercially available microprocessor 32, and produces outputs to the inhibit line at pin 28, the vehicle on-board computer system data bus, J1850, at pin 27, and the Diagnostic line at pin 26. The ASIC controls ultrasound transmission by modulating an "on" or "off" voltage through pin 20 of the ASIC to the transistor, 34. The transistor in  
20 turn is turned on for a short time period to allow current to flow through the primary winding of the transformer T1, which creates a current flow through the secondary winding of the transformer. The current flows to the transducer 27, which in turn transmits an ultrasonic pulse. The returning ultrasonic signals are received by the transducer 27 and returned to pin 19 of the ASIC. Infrared signals from the two IR detectors 21a, 21b (FIG. 9) of unit 24 (S1) are received through pins 22 and 21 of the ASIC.

25 [0067] The incoming signals are amplified and filtered via capacitors, C5 and C6. The ASIC embodies an algorithm in its hardware and software in memory to process the signals and uses a commercially available micro-controller, 32, to do the calculations. The resulting occupancy state output signal is transmitted via the inhibit line to the air bag controller. The ASIC also provides a diagnostic signal regarding the integrity of the sensor system through pin 26 of the ASIC to the air bag controller (ABC 2 FIG. 1) and the vehicle's indicator panel 28 (FIG.1). In the event of a system  
30 failure, the air bag controller defaults to the air bag enable state. The ASIC may receive inputs from the vehicle's on-board computer system 3 (FIG. 1) through the J1850 data bus, the J1850, regarding the various system conditions and environmental conditions which may allow the sensor system to consider certain environmental factors and vehicle conditions in its overall calculations. The ASIC can also transmit to the vehicle's standard on-board computer its status or output. The ASIC provides an oscillating clock signal to the rest of the board through pin 16.

35 [0068] The ASIC functional description is illustrated in FIG. 13. Although the preferred embodiment is to have one ASIC chip, the described functions may be contained in two or more ASIC chips, such as analog in one and digital in another. The ASIC contains a J1850 Bus Interface 40, Analog Outputs 42, a Non-Volatile RAM 44, a Digital I/O RAM 46, a Clock Generator & Precision Oscillator 48, and a Timing & Control subsystem 49. The Digital I/O RAM 46 provides AGC (automatic gain control) 51 and BIAS to AC Gain 53a, 53b and DC Gain 54a, 54b in the processing of infrared  
40 signals, and Ultrasound Control to an Ultrasound Transmit Control 56 in the control of ultrasound through pin 20. The Timing & Control subsystem 49 harmonizes the processing of data among an IR Feature Processor & FIFO 57, a US Feature Processor & FIFO 58, a US Detection 59, a US Xmit Control 56, and the Digital I/O Ram 46.

[0069] There are two infrared inputs and they are processed in the same manner. The DC Gain 54a, 54b detects and accumulates infrared signals to allow level detection by the Level Detector 60a, 60b. The fluctuating portion of the  
45 infrared signal is sent to the AC Gain 53a, 53b for motion detection and sent to the Motion Detector 61a, 61b. The Level Detector 60 determines the amplitude and sends the information to the IR Feature Processor & FIFO 57. The AC Gain block 53 filters the fluctuating signal with the assistance of a capacitor (C5 or C6) and sends the data to a Motion Detector 61, which sends the processed data to the IR Feature Processor & FIFO 57. The IR Feature Processor & FIFO produces IR Features 62.

50 [0070] The ultrasound signal is received through pin 19, amplified and filtered by a Gain & Filter 63, and sent to the US Detector 59. The magnitude 64 and range 65 is extracted from the ultrasound data and sent to the US Feature Processor & FIFO 58, which produces US Features 67. Both the IR Features 62 and US Features 67 are sent to the Feature Combination Processor 66 to produce Fused Features 68. For the case of multiple US sensors, each aimed slightly differently to give wider or full coverage in the passenger compartment and somewhat different characteristic  
55 interior profile signals (see FIGS. 24A, 25A, 27A and 27B) which can be compared, the signals are preferably multiplexed asynchronously, although with redundant or duplicate circuits could be processed synchronously.

[0071] The IR Features 62, US Features 67, and Fused Features 68 are sent to the Digital I/O Ram block 46 for processing. The Digital I/O Ram 46 accesses a micro-controller through pins 2 through 14 of the ASIC (FIG. 12) to do

**EP 0 757 635 B1**

the necessary calculations to process the data, and it accesses the Non-Volatile Ram 44 for information. The results are sent out via the Bus Interface 40 and the Analog Outputs 42.

[0072] In operation, the detection process is generally as follows: Incoming IR and US signals from the multiple sensors in a given interrogation time-period are analyzed for features (or characteristics) such as motion, frequency of motion, level of motion, temperature level, distance of objects, increasing or decreasing trends, and so on. There is a set of features for the infrared signals and a set of features for the ultrasound signals. Certain features from each set are combined ("fused") to produce a third set of fused features. Each of the three sets, or vectors, are compared to a predetermine matrix of confidence levels and empirical relationships to determine a just-sensed feature state. a feature state is one of the five possible states described above and is the state determined by the sensor system for this interrogation period. The just-sensed feature state is compared to the current state. The current state is one of the five states discussed above, and is what sensor system indicates is the actual (near present) condition of the passenger seat. If the just-sensed feature state and the current state are different, a set of criteria is used to determine if the feature state should become the current state. The current state determines whether a disenable or interrupt state signal should or should not be sent to the air bag controller.

[0073] Confidence levels, or the confidence criteria matrix, are determined as follows: Confidence levels are data obtained from analytical and empirical studies of predetermined known possible passenger seat scenarios. Each such scenario is enacted in the passenger seat under a variety of conditions, and features are obtained and analyzed. Some of the features are fused to obtain fused features. Generally, a confidence level is assigned to each feature and state combination. For example, in the presently preferred embodiment, five confidence levels are used for most features. Some of the features are not good indicators of some of the states for certain scenarios so these particular features have reduced or zero confidence levels for those states.

[0074] In more detail, from each scenario, the infrared features and ultrasound features (or appropriate readings from additional sensors, or from other types of sensors, if used). These features from each scenario are compared to features from other scenarios. After examining all of these scenarios and their features, values are assigned to each feature for each state. These values are called confidence levels, and they are assigned according to the feature's strength in indicating the particular state. For example, in the case of a thermal level (quantitative amount) feature from the infrared sensor, five confidence levels from 1 to 5, with 1 being low confidence and 5 being high confidence, may be conveniently assigned this feature's possible values. After examining thermal level features from all the scenarios, the following observations are made: A thermal level of 1 (low thermal level) is a strong indicator of both the IO state and Empty state; at the same time it is a medium indicator of both the OOP state and RFCS state, and a weak indicator of the Occupant state. A thermal level of 3 (medium thermal level) would perhaps be a high indicator of the RFCS state and OOP state, a medium indicator of the Occupant state, and a weak indicator of the IO state and Empty state; thermal level of 5 (high thermal level) would be a high indicator of the Occupant state, a medium indicator of the OOP state and RFCS state, and a weak indicator of the Empty state and the IO state. After examining this feature, confidence levels are assigned according to the strength of the indicators for each of the states. Through this process, all of the features are assigned confidence levels. Note that some of the features are combined ("fused") to provide additional information about the scenarios and confidence levels are assigned to the fused features as well.

[0075] Conceptually, these confidence levels are placed in a two dimensional matrix with rows and columns, the columns being the features or fused features and the rows being the states. This matrix is referred-to as the confidence criteria matrix.

[0076] In examining all the features and scenarios, empirical relationships can be deduced between the confidence levels developed from the feature and state combinations, and sets of empirical formulas can be derived to convert the confidence levels to probability values for each of the states. More specifically, in the empirical studies all the related features are gathered and analyzed for that state. The interrelationship(s) of the confidence levels for the features are analyzed to determine how they are related in order to produce a high probability value for a particular state. From this examination, the empirical formulas are determined for this state. Then, using this set of empirically-derived formulas in actual (real-time) scenarios, a probability value (or confidence level) is obtained for the state. A set of formulas is derived for each of the states. A confidence criteria matrix and sets of empirical formulas are developed for each model of vehicle because of the variations in the interior area and passenger seat configuration for each of the vehicles.

[0077] In FIG. 14, a signal processing functional block diagram for the preferred embodiment of the present invention is illustrated. Infrared raw data from each of the detectors 21a, 21b (FIG. 9) from the Infrared Sensor 24 (IR 1 Raw Data 70 and IR 2 Raw Data 71) are processed through Infrared Feature Processing 74, which produces an Infrared Feature Vector (A') 76. Similarly, Ultrasound Raw Data 75 from the Ultrasound Transducer suite 26 are processed through Ultrasound Feature Processing 77, which produces an Ultrasound Feature Vector (B') 88. The ultrasound Transducer can also transmit an ultrasonic pulse via the Ultrasound Transmit Pulse Timing & Control 87. A subset of the Infrared Feature Vector (A'') 78 and a subset of the Ultrasound Feature Vector (B'') 79 are processed through Fused Feature Processing 80, which produces a Fused Feature Vector (C') 81. These three vectors, Infrared Feature Vector, Ultrasound Feature Vector, and Fused Feature Vector are processed by Detection Processing 82, which produces a

**EP 0 757 635 B1**

Feature State (D') 83. The Feature State is processed by Decision Processing 84 with inputs F' from a Diagnostic Controller 86, and the Feature State is evaluated to determine a Current State (E') 85. Depending on the Current State, a state signal for disabling or otherwise controlling the air bag may be sent to the air bag controller as shown. The Diagnostic Controller 86 also indicates via F' system health of the sensor system e.g. ok or malfunction, and in the latter case the air bag is enabled.

[0078] Sets of features are extracted from the signals for the given interrogation period. In FIG. 15a, the Infrared Feature Processor 74, raw infrared data is digitized by a Digitizer 100 with reference to Gain Calibration Data 101 obtained at the start-up of the vehicle and stored in Memory 102. Gain Calibration Data is used to calibrate sensor readings. From this digitized raw data, the frequency of the lateral motion of object or objects in the passenger seat is extracted and is calculated by a Frequency Processor 104 to obtain an IR 1 Lateral Motion Frequency component 106. From the same digitized raw data, the thermal level of the object at the passenger seat is converted to one of the predetermined levels by a Comparator 108 to obtain an Infrared 1 Thermal Level component 110. The predetermined levels are levels that correspondingly group analog signal values to a set of discrete n-equal levels. This component is compared against previously obtained thermal levels stored in Memory 112 by a Temporal Processor 114 to determine the trend of the thermal level (increasing or decreasing thermal level), and produces an Infrared 1 Thermal Temporal component 116. The digitized raw data is also filtered by a Pre-Filter 118 to enhance motion property of the data, and the data is compared to predetermined levels of motion by using a Comparator 120 and an Infrared Lateral Motion Level component 122 is determined. This component is compared by a Temporal Processor 126 against previously obtained motion levels stored in Memory 124 to determine the trend of the motion level, an Infrared Lateral Motion Temporal component 128.

[0079] Raw data from the second detector is processed in the same manner to obtain an IR 2 Lateral Motion Level component 130, an IR 2 Lateral Motion Temporal component 132, an IR 2 Thermal Level component 134, an IR 2 Thermal Temporal component 136, and an IR 2 Lateral Motion Frequency component 138.

[0080] The motion levels from the two infrared detectors are correlated by a Motion Correlator 140 to determine a Longitudinal Motion Level component 142, which shows any longitudinal motion of the occupant. The longitudinal information obtained from each detector is contrasted against each other to obtain an Infrared Differential Longitudinal Motion Level component 144, which is significant when there is motion from one detector but not from the other detector. This component is compared by a Temporal Processor 148 against previously obtained components stored in Memory 146 to determine the trend of the motion level or an Infrared Differential Motion Temporal component 150. The frequency of the longitudinal motion of the occupant is calculated by a Frequency Processor 152 to obtain an Infrared Differential Motion Frequency component 154. The Infrared Feature Vector (A') 76 is comprised of the above described infrared components, while only features 106, 110, 128, 154, 132, 134 and 138 are used to form the IR Feature Vector subset A'2, 78.

[0081] Now referring to FIG. 15b, which illustrate the Ultrasound Feature Processor 77, when an ultrasound pulse is transmitted to the targeted area, the ultrasound transducer may receive several ultrasonic returns shortly after the pulse bounces off several objects. These returns are digitized by a Digitizer 160 with reference to Ultrasound Calibration Data 163 obtained at the start-up of the vehicle and stored in Memory 162. Each of these returns will have a point in time when the return first begins, called an edge, which is detected by an Edge Detector 164. And each of the returns will have a point in time when its amplitude is at the highest level (or peak level) and this point in time is detected by a Peak Detector 166. The amplitude is compared to predetermined levels by a Comparator 168 to obtain return levels. From the edge and peak level time of the returns, Absolute Ranges 170 (or distances) of the objects from the sensor unit are determined. The first return from the transmitted pulse usually indicates the object of interest in the passenger seat area and is the First Return Level component 176. The trend (increasing or decreasing) of the First Return Level component is the First Return Level Rate of Change component 174, which is determined with reference to previous return levels stored in Memory 172. The Absolute Range - First Return component 178 is the absolute distance of the first object from the sensor. The rate of movement of all the returns from one pulse is the Range Motion component 180 found by using a Differentiator 182, and the rate of movement of the Range Motion component is the Range Motion Rate of Change component 184 found by using a Differentiator 186. Range Motion shows the radial component of motion and vibration of an object. The trend of Range Motion, faster or slower over time, is the Range Motion Temporal component 188 determined with reference to previous range motion values stored in Memory 190 and by using a Temporal Processor 192. The frequency of Range Motion is the Range Motion Frequency component 194 determined by a Frequency Processor 196. The relative values between the returns are determined by a Range Correlator 198 to find Relative Range Values components 200, the corresponding levels or the Relative Range Levels components 202, and the trend of Relative Range Levels or the Relative Range Levels Rate of Change component 204, which is determined by a Differentiator 206.

[0082] The relative range level components tend to indicate how objects change in relation to each other and may indicate movement of the object in interest. The range motion components indicate whether there is a constant frequency of movement which would tend to indicate an inanimate object, e.g. a vibration or flutter, or if there are random

**EP 0 757 635 B1**

movements which would tend to indicate an occupant.

**[0083]** The Multipath Triangulation component 208 is where the ultrasonic pulse bounces off several objects before it is received by the transducer, and this value is compared by the Range Correlator 210 to the Range Calibration Data 162 obtained at the start-up of the vehicle. This component is helpful in determining whether there is clarity in the scene being scanned. If this component's value is low, it tends to indicate clarity in the scene and a corresponding high confidence in the scan. If this component's value is high, it tends to indicate confusion in the scene and a corresponding low confidence in the scan. The Air Temperature 212 is obtained from the fact that the air is denser at lower temperature than higher temperature, and there is a faster rate of return of the signal at lower temperature because it transmits through denser air. The Ultrasound Feature Vector (B') 88 is comprised of all of the above described ultrasound components, while the ultrasound feature vector subset comprises features 170, 178, 188, 194, 200 and 208 only.

**[0084]** Now, referring to block C in FIG. 16, the Fused Feature Processing 80, a subset of the Infrared Feature Vector (A') 78 comprises the IR 1,2 Differential Motion Frequency component 144, the IR 1 Lateral Motion Frequency component 106, the IR 2 Lateral Motion Frequency component 138, the IR 1 Thermal Level component 110, the IR 2 Thermal Level component 134, the IR 1 Lateral Motion Temporal component 128, and the IR 2 Lateral Motion Temporal component 132. A subset of the Ultrasound Feature Vectors (B'') 79 for this embodiment comprise the Absolute Ranges components 170, the Absolute Range - 1st Return component 178, the Multipath Triangulation component 208, the Relative Range Values components 200, the Range Motion Temporal component 128, and the Range Motion Frequency component 194. The two subsets are used to extract fused features components for the Fused Feature Vector (C') 81. Infrared Spatial Frequency Components 300 are sets of distance, frequency, and levels of the objects calculated by the Spatial Correlation Processor 302, which determines the distance, frequency of movement, and size of the objects detected by the two sensors. The IR 1 Absolute Surface Temperature component 304, the IR 2 Absolute Surface Temperature component 306, and the IR Differential Absolute Surface Temperature component 308 are, respectively, temperatures and the difference in temperature found by using the Temperature Processor 310. As cross-correlations, the Infrared/Ultrasound Motion Level Correlation component 312, the Infrared/Ultrasound Motion Level Temporal Correlation component 314, and the Infrared/Ultrasound Frequency Correlation component 316 are levels of movement, the trend of the movement (slower or faster), and the frequency of movement as determined by the Correlation Processor block 318. Note, all components of the Fused Feature Vector (C') 81 are calculated by fusing features from both the infrared and ultrasound sensors.

**[0085]** Now referring to FIG. 17, depicting the Detection Processor 82, each of the vectors is processed by its own respective feature confidence processor and confidence criteria matrix. The feature components are processed individually and some of the feature components are fused for processing. Referring first to Infrared Feature Vector processing, the components, individual or fused, of the Infrared Feature Vector (A') 76 are processed by an Infrared Feature And Infrared Feature Fusion Confidence Processor 400. In processing the components, references are made to an Infrared Confidence Criteria Matrix stored in Memory 402, which is modified by previously processed data stored in a History Buffer 404. This process produces an Infrared Feature Detection and Confidence Matrix 406, which is processed by an Infrared 1st Level Fusion Detection Processor 408 to produce an Infrared Detect Decision Confidence Vector 410. The Infrared/Ultrasound Detect Decision Confidence Vector 412 and the Ultrasound Detect Decision Confidence Vector 414 are produced in the same manner with their respective processing blocks, history buffers, and memory.

**[0086]** The Detection Fusion Processor 416, with reference to previously processed data stored in its History Buffer 418 and by using empirical formulas and relationships between and among the three detect decision confidence vectors (described above), produces a Feature State (D') 83. A Feature State is one of the states previously mentioned: Occupant state, Empty state, RFCS state, OOP state, and IO state.

**[0087]** The three vectors, Infrared Feature Vector (A') 76, Ultrasound Feature Vector (B') 88, and Fused Feature Vector (C') 81, are used to produce a Feature State (D') 83 as follows: Using the Infrared Feature Vector as an example, let Infrared Feature Vector = {IRF1, IRF2, IRF3, ..., IRF14}, where each of the IRF# represents a component, and where the Infrared Feature Vector has fourteen vector components (as shown in FIG. 18). In processing the components of the Infrared Feature Vector, the confidence processor (e.g. Infrared Feature and Infrared Feature Fusion Confidence Processor 406) refers to a confidence criteria matrix (e.g. Infrared Confidence Criteria Matrix 402), which is data empirically developed through testing under various conditions and scenarios, as described above. The confidence criteria matrix contains the confidence levels, which may be and are usually modified by previously processed data. The confidence levels indicate the likelihood of the states for the given feature component values. For each pertinent feature component or fused feature component, there is a set of confidence levels for each state.

**[0088]** For example, referring now to FIG. 18, for a particular Infrared Feature Vector Component ("IRFi") and states, an IRFi component value of 5 has an associated confidence level of 1.3 for the RFCS state, a confidence level of 1.3 for the OOP state, and confidence level of 0 for other states. For an IRFi value of 9, it has a confidence level of 3.3 for the IO state and 0 for other states. The confidence levels may be modified by previously processed vectors stored in the History Buffer, and may be modified to account for environmental and other changes. For example, should recent history show that the vehicle interior has changing thermal characteristics, e.g. starting the vehicle in cold weather with



EP 0 757 635 B1

heater on full blast and later maintaining a consistent and warm temperature, the confidence criteria matrix is adjusted to account for this change. Since there is an overall higher thermal level in the vehicle, a indicate the presence of occupants or their movement. Thus, over time, the confidence level for each of the states may vary. FIG. 19 shows a plot of the confidence level for one state of a particular vector component changing over time.

[0089] There are also fused features confidence levels, where two or more vector components can indicate confidence levels for the states. For example, in referring to FIG. 20, an IRF5 value of 1.2 and an IRF1 value of 1.2 would result in a high confidence value for the OOP state and 0 for other states; an IRF5 value of 3 and an IRF1 value of 1 will have a confidence level of 0 for all the states; and an IRF5 value of 2 and an IRF1 value of 3.3 will have a low confidence value for the RFCS state and 0 for other states. For each feature vector, there are a number of these possible fused vector components and their associated confidence levels. The output of the feature and fused feature processing block is a matrix, called the detection and confidence matrix (e.g. Infrared Feature Detection and Confidence Matrix), shown graphically FIG. 21. Note that a fused vector may fuse two or more feature vector components.

[0090] The Infrared Feature Detection and Confidence Matrix 406 (FIG.17) is input to the Infrared 1st Level Fusion Detection Processor 408. In the previous step, confidence level calculations provide each individual Infrared feature or fused features with its own detection "decision." These individual decisions are now Factored together by state in empirically derived functional relationships and formulas, as described above, i.e.:

IR confidence (RFCS) = Function of {IRF1(RFCS),IRF2(RFCS),..., IRFn(RFCS), IRF3,4,5(RFCS), IRF1,10,11 (RFCS),IRF8,12(RFCS),...};

IR confidence (Occupied) = Function of {IRF1(Occupied), IRF2 (Occupied),..., IRF8,12 (Occupied),...};

IR confidence (OOP) = Function of {IRF1(OOP), IRF2 (OOP),..., IRF9,11 (OOP),...};

IR confidence (IA) = Function of {IRF1(IA), IRF2 (IA),..., IRF8,12 (IA),...}; and

IR confidence (Empty) = Function of {IRF1(Empty), IRF2 (Empty), ...,IRF9,11 (Empty),...}.

[0091] Each of the above functional relationship will produce a value which indicates the confidence level (or probability value) for the associated state. The output of this process is a vector, called detect decision confidence vector (e.g. Infrared Detection Decisions Confidence Vector 410 in FIG. 17), where each state has an associated confidence value. An example of the Detect Decision Confidence Vector is: Infrared Detection Decision Confidence Vector = OOP state: 0.02, Empty state: 0.90, RFCS state: 0.04, IO state: 0.0, Occupant state: 0.20 }. In the same fashion, the Ultrasound Detect Decision Confidence Vector 414 is produced from the Ultrasound Feature Vector 88, and the Infrared/ Ultrasound Detect Decision Confidence Vector is produced from the Fused Feature Vector 81.

[0092] Continuing in reference to FIG. 17, these three independent detect decision confidence vectors, Infrared 410, Infrared/Ultrasound 412, and Ultrasound 414, are inputs to a Detection Fusion Processor 416, which produces a Feature State 83 (see also FIG. 14). The manner in which the Feature State decision is arrived at includes weighing functions associated with each confidence vector and weighting of recent decision history stored in a History Buffer 418. For example, in the case of an RFCS, from analytical and empirical studies, we have found that the infrared feature is a "weak" indicator, the ultrasound feature is a "strong" indicator, and the combined infrared/ultrasound fused feature is a "moderately strong" indicator. With these three features, more weight will be applied to an ultrasound declared RFCS state, less weight will be applied to the fused feature declared RFCS state, and even less weight to a infrared declared RFCS state. In this fashion, the three detect decision vectors, the IR Detect Decision Confidence Vector, the US Detect Decision Confidence Vector, The IR/US Detect Decision Vector, are weighed and combined to produce a single vector with a corresponding confidence value for each of the states. The state with highest confidence value is selected as the feature state.

[0093] To summarize Feature state processing, by using the feature vector and the time-adjusted confidence criteria matrix as input, the processor performs essentially a look-up table function for the confidence levels on each vector component or fused vector component for each state. In this manner, decision making is made independently at the infrared, ultrasound, and infrared/ultrasound feature level. Furthermore, in this process, some features do not provide information on some of the states because these features alone are not dependable to make correct decisions for these states. Although some features are not reliable to make correct decisions for some of the states, in combination, these features are reliable to cover all the states, and this is the power behind the use of multiple feature fusion from the different sensors.

[0094] Note the above described preferred process involves first extracting features from raw sensory data, then producing fused features, associating confidence levels with the features and fused features to produce confidence levels for the predefined states, and determining a feature state from the confidence levels of the states. This process employs fusion at the feature level and at the detection level; it is not simple error correction routines. Other fusion methods can be employed within the principles of the present invention. An algorithm can also be used under certain circumstances to fuse the raw sensory data before any feature is extracted. An algorithm can be employed to extract features and produce a feature state from all the features extracted. Similarly, an algorithm can be utilized to extract features from each sensor, produce a state for each sensor, and fuse the states to produce a feature state. In other words, fusion of data can be done at the raw data level, feature level, decision level, or combination thereof, and any

EP 0 757 635 B1

one of the above algorithm or combination thereof can be used for the present invention. The preferred embodiment utilizes a combination of fusion at the feature level and at the detection level, and the empirical comparison studies demonstrate this preferred combination provides superior accuracy in detection and discrimination for highly reliable decision.

5 [0095] Referring now to Decision Processing 84 (E) in FIGs. 14 and 22, the Decision Confidence Processor 500 compares the Feature State (D') against a Current State 502, State Change Criteria 503 stored in Memory 504, a History Buffer 506, and a System Health Status Buffer 508. The Current State is the state condition as determined by the sensor system, i.e. what the sensor system indicates is the state of the passenger seat, and the corresponding signal to maintain an enable or disable signal to the air bag controller. If the presently sensed Feature State is the same as the Current State, the Current State is not changed and the History Buffer store the Feature State. If the Feature State is different from the Current State, the Decision Confidence Processor determines whether the Feature State should become the Current State. For the Current State to become the Feature State, it must satisfy the State Change Criteria stored in Memory, which is a set of predetermined criteria to ensure the highest level of safety and reliability in the decision to enable or disable air bag deployment. The set of predetermined criteria generally requires that more confirmations be made before changing from a deployment state to a non-deployment state, and less confirmations be made in going from a non-deployment state to a deployment state. The Decision Confidence Processor also looks at the history (since start-up of the vehicle) of the Current States stored in the History Buffer and considers what Current State decisions has been made and how often has the Current State been changed. The History Buffer is updated by the Decision Confidence Processor.

20 [0096] In addition, a Diagnostic Controller 510 checks sensor system integrity and updates the System Health Status Buffer. The Diagnostic Controller provides a System Health 512 indicator to the air bag controller and the vehicle's indicator panel. In case of system failure, the air bag controller defaults to the air bag deployment condition, e.g., by not sending an interrupt to the air bag controller. The Decision Confidence Processor checks the System Health Status Buffer and the other system conditions to ensure the sensor system is functioning properly.

25 [0097] As an example of a state change decision process, if the Current State is the Empty state with the corresponding signal to disable the air bag and the Feature State is the Occupant state, the Decision Confidence Processor will check the System Health Status Buffer to ensure proper system integrity. It will also check the History Buffer to see how many of the previous consecutive periods has the Feature State been the Occupant state or how often has the Current State been changed. The Decision Confidence Processor will change the Current State from Empty state to Occupant state if, during the last two periods, for example, the Feature State has been the Occupant state. On the other hand, if the Current State has been the Occupant state, it will take much more than two periods to change the Current State from the Occupant state to the Empty state. If the current state has been changed quite a few times previously, it will be increasingly more difficult to change the current state from occupant to empty state. This is because the preferred embodiment biases decisions regarding state change toward safety.

35 [0098] FIG. 23 shows, in the case of detecting a front facing occupant and permitting the air bag to deploy, while inhibiting deployment if an RFCS is detected, that the dual sensor system of the invention provides very high functional reliability. The reliability, R, of .98 (98%) or greater is obtained using sensor fusion even where the probability of detection  $P_D$ , for Sensor 1 is as low as .3 and the probability of false detection,  $P_{FA}$ , is as high as  $10^{-4}$  (R of .27), single Sensor 2 has a  $P_D$  of .99 and  $P_{FA}$  is  $10^{-6}$ .

40 [0099] The AOS of this invention can even recognize the vehicle it is in by measuring the relative position of the module and the interior attributes of the vehicle. FIG. 24a shows actual measurements performed by the above-described AOS system in a Chrysler LH vehicle. The scope trace shows the actual time referenced acoustic returns from the test vehicle, the layout of which is shown in FIG. 24b. FIG. 25a shows actual measurements performed in a 1989 Dodge pickup truck of layout shown in FIG. 25b. Table 1 below shows the actual timing values measured by the AOS system. These results show a signal margin of 1060  $\mu s$  at the IP measurement mark, 257  $\mu s$  at the seat position mark and 543  $\mu s$  at the floor mark. The total time difference is 1860  $\mu s$ . With a time resolution of better than 20  $\mu s$ , the AOS has a large signal processing margin when identifying the difference between vehicles such as a Chrysler LH and RAM truck. Comparison of the traces of FIGs. 24a and 25a show the unique signatures of the vehicle interior configurations by which the AOS of this invention can recognize the vehicle, and a normal state thereof.

TABLE 1

	LH	TRUCK
IP Return	2804 $\mu s$	3864 $\mu s$
Seat Return	5297 $\mu s$	5040 $\mu s$
Floor Return	6933 $\mu s$	7476 $\mu s$

EP 0 757 635 B1

[0100] We have measured several types of significant data to evaluate the potential performance of the AOS. This data shows excellent signal to noise ratios (SNR) and a large design performance margin from the sensor suite. The signal to noise values and resulting predicted performance are summarized in FIG. 26. The Pd numbers in FIG. 26 were calculated using the 4-feature fused probability equation shown below.

$$R_{1,2,3,4} = R_1 + R_2 + R_3 + R_4 - R_1(R_2 + R_3 + R_4) - R_2(R_3 + R_4) -$$

$$R_3R_4 + R_1(R_2R_4 + R_3R_4) + R_2(R_3R_4 + R_1R_3) - R_1R_2R_3R_4$$

The individual probability inputs to the equation were derived from actual measurements and worst case analysis.

[0101] Testing conducted on typical IR detectors yielded SNR in the range of 12:1 from a normal occupant in an 83°F vehicle. The ultrasound sensor yields a SNR of 16:1 during the same type of test. By way of comparison, the ultrasound sensor return from a rear facing child seat was measured with the RFCS both uncovered and covered with two wool blankets. The child seat was a Century brand and was placed in a 1993 Eagle Vision. The uncovered child seat gave an SNR of 20:1 while the seat covered under two blankets generated a SNR of 11:1. These signal traces are shown in FIGs. 27a and 27b, respectively. This data indicates that the system of the invention can easily discriminate even between these two subtly different occupant states.

[0102] The measurements reflected in FIGs. 22-27 were taken under static conditions in the laboratory. Assuming that under worst case conditions, the signals would be degraded by about a factor of 4, all SNR data was divided by 4. With only small gains in signal processing, the data was increased by a factor of 2. This small signal processing gain does not include using any adaptive thresholding or historical inputs in the detection process which are standard techniques that can provide substantially increased signal processing gain. Because this is a worst case analysis, such adaptive and historical gains are not included.

[0103] Using the adjusted worst case system performance numbers, detection probabilities for each sensing mode were calculated. The calculation assumptions used here were simple envelope detection using fixed thresholds in a Gaussian noise distribution, whereas the AOS of the invention uses more sophisticated detection processes and has higher individual detection probabilities to ensure adequate Pd under all conditions. The individual sensor mode detection probabilities are shown in FIG. 26, and were used to calculate the fused detection probability shown in the right hand column of FIG. 26. For this analysis a life of 15 million cycles was assumed. The probability of false alarm for this analysis was set at one in a million cycles. The false alarm probability will be reduced to an even smaller number when history and adaptive processing gains are considered. Not including these gains shows worst case system performance.

[0104] Diagnostic reliability also benefits from multi-sensor fusion much the same way that detection benefits. As shown in FIG. 26 when each sensor diagnostic probability is fused, the resultant system diagnostic probability is increased. As was done for the detection analysis, the diagnostic probability numbers began as lab measurements that were adjusted downward for worst case conditions, then adjusted for worst case signal processing gain. These individual probabilities were taken from Gaussian noise and a false alarm rate of one in a 100 million cycles.

[0105] Both IP (Instrument Panel or Dashboard) and overhead locations were evaluated and tested for operability. High reliability occupant and rear facing child seat detection can be performed from both the IP and the overhead position by use of sensor fusion techniques of this invention. Both the IR and the ultrasonic sensor performance has been determined to be location independent, but, as noted, the front headliner co-location is preferred for the reduced cost and sensor blockage incidence noted above.

[0106] FIG. 28 is an isometric view of the AOS 1 of this invention as a single unit 22 in suitably configured housing. Two IR sensors 24a and 24b are shown co-located with three US transducers 26a, 26b and 26c. Each "looks" over at its designated field through appropriately angled bore-holes 600a-e as shown.

[0107] DISCUSSION: The overhead sensor position offers system performance advantages over the instrument panel (IP) mounting position. The overhead position is much harder to intentionally block by normal occupant behavior. In the overhead position, the relative geometry of the vehicle is much more easily measured. This feature allows an overhead mounted AOS to measure the relative position of the IP, the seat and the floor, and determine the type of vehicle in which the AOS has been placed.

[0108] In this regard, it should be noted that it is not necessary to separate the US sensor(s) from the IR sensor(s), and it is preferred to co-locate them in a single overhead unit disposed adjacent the juncture of the windshield and forward end of the headliner. The use of plural sensors, presently preferred being three US and two IR sensors (each with six active element segments) and sensor fusion for cross sensor correlation of features that come from different phenomena permits determination of the presence or absence of an object and categorization or classification as to the nature of the object, i.e., whether it is an occupant, and if so, discriminates between types, e.g., RFCS vs. FFCS, human passenger, box, animal, etc. The automotive occupancy system of the invention does not per se necessarily

**EP 0 757 635 B1**

create an enable or disable signal. Rather, it generates a state signal as described above on which the microprocessor may act to enable, disable or otherwise control the relative deployment, rate of deployment and/or volume of one or more deployed air bag(s). The sensor fusion techniques of the invention employ orthogonal features within the same sensor that are otherwise uncorrelated. The AOS system correlates features derived from different phenomenology across the different sensors; and samples the same features from uncorrelated sensors. The AOS of the invention looks at all the features, using linear transformation from some 30-features processed in parallel, before making a state of occupancy decision including presence or not, location, and categorization of the nature of the object present.

**[0109]** It should be understood that various modifications within the scope of this invention according to the present set of claims, can be made by one of ordinary skill in the art. For example, the memory and history buffers can be used to store the state decision for a predetermined period (e.g., zero up to about 60 to 600 seconds, depending on size of memory supplied in the system, prior to a crash) in order to determine what the occupants did prior to or during the crash. Was a dog out of position, a passenger make unusual motions indicative of distractions or intrusions, etc? This may be dumped from time to time into a special memory in a crash "black box" along with other vital vehicle operating data, fuel level, speed, acceleration/deceleration, change of direction, braking, lights and/or wipers-on, interior climate and the like. The current state history (and initial state decision) are kept in RAM. When the air bag control module signals impending, likely, probable or possible crash (impact triggered), this data is dumped to an EPROM in the AOS unit for post-crash extraction and analysis. The typical history of interest would be from crash signal back in time to from about 1/2 second to 30 seconds precrash, and can extend through the crash event, so long as the sensors are preserved and functioning undamaged. This data can also provide analysis of compartment damage during the crash.

**[0110]** Further, once the on-board computer system 3 (**FIG. 1**) produces a disable signal to the air bag, it can at the same time signal an alert in the passenger compartment, e.g., by a warning/reminder light on the dashboard or activating a buzzer, beeper or a voice chip with a warning or notice message that the air bag is deactivated.

**[0111]** We therefore wish our invention to be defined by the scope of the appended claims.

**Claims**

1. A method determining whether or not to de-activate a vehicle's passenger passive restraint system (4) as a function of a current state value determined by comparing measured signal features to a predetermined set of confidence values and empirical relationships obtained using various known occupancy scenarios (E, O, IO, RFCS, OOP) and a set of state change criteria, comprising the steps of:

(a) sensing the characteristics of occupancy of a particular passenger seat within the vehicle using a plurality of sensors (24, 26) functional associated with said passenger seat and developing a set of corresponding electrical signals (70, 71, 75);

(b) evaluating said electrical signals to determine a plurality of signal features included in each of said signals (76, 78; 79, 88);

(c) combining certain ones of said signal features (78, 79) to obtain a plurality of fused features (81);

(d) associating said signal features and said fused features with the confidence values and the empirical relationships to determine a feature state value (83),

(e) identifying the feature state value (83) as the current state value corresponding to one of the various known occupancy scenarios if the set of state change criteria is met, and

(f) generating a de-activate signal if said current state value is one of a predetermined subset of state values for which said passive restraint system is to be de-activated.

2. A method according to claim 1, wherein said passenger passive restraint system includes an air bag deployment system having an air bag that is located for deployment proximate said passenger seat and that can be de-activated in response to said de-activate signal.

3. A method according to claim 2, wherein said predetermined set of state values includes values corresponding to an empty seat (E) state, an occupied seat (O) state, a rear-facing child seat (RFCS) state, an out-of-position passenger (OOP) state, and an inanimate object (IO) state.

4. A method according to claim 2, wherein said occupancy scenarios include a person seated in said passenger seat, a person seated in said seat holding a grocery bag, a child in a rear-facing child seat disposed in said seat, a child in a forward-facing child seat disposed in said seat, a child in a forward-facing child seat disposed in said seat, a person positioned in close proximity to the air bag deployment location, a child standing in said seat at a distance from the air bag deployment location, a standing child in close proximity to the air bag deployment location, an

**EP 0 757 635 B1**

empty seat, an inanimate object disposed in said seat, a pet disposed in said seat, and an empty seat.

5. A method according to claim 3, wherein:

- 5 (a) the occupied seat (O) state corresponds to the scenarios of a person seated in said seat, a person seated in said seat holding a grocery bag, a child in a forward-facing child seat disposed in said seat, a child standing in said seat at a distance from the air bag deployment location, and a pet disposed in said seat;  
(b) the rear-facing child seat (RFCS) state corresponds to the scenario of a child in a rear-facing child seat disposed in said seat;  
10 (c) the out-of-position (OOP) passenger state corresponds to the scenario of a person positioned in close proximity to the air bag deployment location;  
(d) the inanimate object (IO) state corresponds to the scenario of an inanimate object disposed in said seat; and  
(e) the empty seat (E) state corresponds to the scenario of an empty seat.

15 6. A method according to claim 1, wherein said plurality of sensors is selected from the group consisting of infrared sensors, ultrasound sensors, weight sensors, microwave sensors, capacitance sensors, light sensors, and laser sensors.

20 7. A method according to claim 1, wherein said signal features include indicia of (a) motion, (b) frequency of motion, (c) levels of motion, (d) difference in motion levels, (e) distance, (f) relative distance, (g) thermal levels, and (h) difference in thermal levels.

25 8. A method according to claim 1, wherein said fused features include indicia of (a) temperature, (b) temperature differences, (c) approximate size of objects, (d) distance, (e) motion, (f) frequency of motion, and (g) levels of motion.

9. A method according to claim 1, wherein said associating step (d) comprises the substeps of:

- 30 (i) using predetermined confidence values and said signal features and fused features to produce (1) a decision confidence matrix of confidence values for the signal features of the signals of each sensor, and (2) a decision confidence matrix of confidence values for said fused features;  
(ii) using the empirical relationships to calculate a decision confidence vector corresponding to each of said decision confidence matrices;  
(iii) weighing each decision confidence vector in a predetermined manner to produce weighted vectors; and  
35 (iv) combining the weighted vectors to produce a resultant vector having state values from which the feature state value is selected.

40 10. A method according to claim 1, wherein said set of state change criteria includes consideration of previous feature state values and previous current state values.

11. A method according to claim 1, wherein the subset of said predetermined set of state values, for which said passive restraint system is to be de-activated, includes state values corresponding to a rear-facing child seat state, an empty seat state, an inanimate object state, and an out-of-position state.

45 12. A method according to claim 1, wherein said passive restraint system includes a single canister air bag deployment system.

13. A method according to claim 1, wherein said passive restraint system includes a multi-canister air bag deployment system capable of partially pressurizing an air bag to various degrees of pressure.

50 14. A method according to claim 9, further comprising modifying said confidence values over time to correspond to changes in environmental conditions of the vehicle.

55 15. A method according to claim 1, wherein said sensing step includes using an ultrasound sensor to transmit ultrasonic pulses and to receive ultrasonic return signals.

16. A method according to claim 15, further comprising varying the transmission times between said ultrasonic pulses.

**EP 0 757 635 B1**

17. A method according to claim 6, wherein said sensing step includes the use of two infrared detectors placed close to each other and separated by a baffle.

18. A method according to claim 17, wherein said sensing step further includes using a multi-element Fresnel lens to focus one detector on a seat back of the passenger seat and to focus the other detector on a seat surface of the passenger seat.

19. A method according to claim 7, wherein said indicia of motion include indicia of lateral motion and longitudinal motion.

20. A method as recited in claim 1, wherein said plurality of sensors include:

- (a) a first infrared detector generating a first raw data signal;
- (b) a second infrared detector generating a second raw data signal; and
- (c) an ultrasound detector generating a third raw data signal;

and wherein said evaluating step (b) includes:

- (i) processing said first and second raw data signals to develop a first set of signals representing a first group of signal features and defining an infrared feature vector signal;
- (ii) processing said third raw data signal to develop a second set of signals representing a second group of signal features and defining an ultrasound feature vector signal;
- (iii) selecting a subset of said first group of signal features to develop a third group of signal features defining an infrared feature vector subset signal; and
- (iv) selecting a subset of said second group of signal features to develop a fourth group of signal features defining an ultrasound feature vector subset signal.

21. A method as recited in claim 20, wherein said combining step includes processing said infrared feature vector subset signal and said ultrasound feature vector subset signal to develop a fused feature vector signal.

22. A method as recited in claim 21, wherein the processing of said infrared feature vector subset signal and said ultrasound feature vector subset signal includes:

- (a) correlating a first subset of said third group of signal features with a first subset of said fourth group of signal features to develop an infrared spatial frequency components signal;
- (b) processing a second subset of said third group of signal features with a second subset of said fourth group of signal features to develop an infrared first absolute surface temperature signal, an infrared second absolute surface temperature signal, and an infrared differential absolute surface temperature signal;
- (c) processing a third subset of said third group of signal features with a third subset of said fourth group of signal features to develop an infrared/ultrasound motion level correlation signal, an infrared/ultrasound motion level temporal correlation signal, and an infrared/ultrasound motion frequency correlation signal; and
- (d) the infrared spatial frequency components signal, the infrared first absolute surface temperature signal, the infrared second absolute surface temperature signal, the infrared differential absolute surface temperature signal, the infrared/ultrasound motion level correlation signal, the infrared/ultrasound motion level temporal correlation signal, and the infrared/ultrasound motion frequency correlation signal are combined to form said fused feature vector signal.

23. A method as recited in claim 22, wherein the signals representing the first group of said signal features include a first infrared lateral motion frequency signal, a first infrared thermal temporal signal, a first infrared thermal level signal, a first infrared lateral motion temporal signal, a first infrared lateral motion level signal, an infrared longitudinal motion level signal, an infrared differential motion level signal, an infrared differential motion temporal signal, an infrared differential motion frequency signal, a second infrared lateral motion frequency signal, a second infrared thermal temporal signal, a second infrared thermal level signal, a second infrared lateral motion temporal signal, and a second infrared lateral motion level signal.

24. A method as recited in claim 23, wherein the signals representing the second group of said signal features include an absolute range signal, a first return level rate of change signal, a first return level signal, an absolute range-1st return signal, a range motion signal, a range motion rate of change signal, a range motion temporal signal, a range

**EP 0 757 635 B1**

motion frequency signal, a relative range level rate of change signal, a relative range level signal, a relative range value signal, a multipath triangulation signal, and an air temperature signal.

25. A method as recited in claim 24, wherein the signals representing the third group of said signal features include the first infrared lateral motion frequency signal, the first infrared thermal level signal, the first infrared lateral motion temporal signal, the infrared differential motion frequency signal, the second infrared lateral motion frequency signal, the second infrared thermal level signal, the second infrared lateral motion temporal signal, and the infrared differential motion frequency signal.
26. A method as recited in claim 25, wherein the signals representing the fourth group of said signal features include the absolute range signal, the absolute range-1st return signal, the range motion temporal signal, the range motion frequency signal, the relative range value signal, and the multipath triangulation signal.
27. A method as recited in claim 26, wherein the signals representing the first subset of said third group includes the first infrared lateral motion frequency signal, the second infrared lateral motion frequency signal, and the infrared differential motion frequency signal.
28. A method as recited in claim 27, wherein the signals representing second subset of said third group include the first infrared thermal level signal and the second infrared thermal level signal.
29. A method as recited in claim 28, wherein the signals representing the third subset of said third group include the first infrared lateral motion frequency signal, the second infrared lateral motion frequency signal, the first infrared lateral motion temporal signal, and the second infrared lateral motion temporal signal.
30. A method as recited in claim 29, wherein the signals representing the first subset of said fourth group include the absolute range signal, the absolute range-1st return signal, the relative range value signal, and the multipath triangulation signal.
31. A method as recited in claim 30, wherein the signals representing the second subset of said fourth group include the absolute range signal, and the absolute range-1st return signal.
32. A method as recited in claim 31, wherein the signals representing the third subset of said fourth group include the range motion temporal signal and range motion frequency signal.
33. Apparatus determining whether or not to control a vehicle's passenger passive restraint system (4) as a function of a current state value determined by comparing measured signal features to a predetermined set of confidence values and empirical relationships obtained using various known occupancy scenarios (E, O, IO, RFCS, OOP) and a set of state change criteria, comprising the following features:
- (a) means sensing (24, 26) the characteristics of occupancy of a passenger seat (12) within the vehicle using a plurality functionally associated with said passenger seat (12) and a set of corresponding electrical signals (70, 71, 75);
  - (b) means evaluating (74, 77) said electrical signals to determine a plurality of signal features included in each of said signals;
  - (c) means combining (80) certain ones of said signal features to obtain a plurality of fused features;
  - (d) means associating (82) said signal features and said fused features with the confidence values and the empirical relationships to determine a feature state value;
  - (e) means identifying (84) the feature state value as the current state value corresponding to one of the various known occupancy scenarios if the set of state change criteria is met; and
  - (f) means generating (84) a state of control signal if said current state value is one of a predetermined set of state values for which said passive restraint system (4) is to be controlled, including possible de-activation of said restraint system.
34. Apparatus according to claim 33, wherein said passenger passive restraint system includes an air bag deployment system having an air bag that is poised for deployment proximate said passenger seat and that can be de-activated or inflation controlled in response to said state of control signal.
35. Apparatus according to claim 34, wherein said predetermined set of state values includes values corresponding

**EP 0 757 635 B1**

to an empty seat state (E), an occupied seat state (O), a rear-facing child seat state (RFCS), an out-of-position passenger state (OOP), and an inanimate object (IO) state.

5      **36.** Apparatus according to claim 34, wherein said occupancy scenarios include a person seated (8) in said passenger seat (12), a person seated in said seat holding a grocery bag (18), a child in a rear-facing child seat (11) disposed in said seat, a child in a forward-facing child seat (20) disposed in said seat, a person positioned in close proximity to the air bag deployment location, a child standing in said seat at a distance from the air bag deployment location, a standing child (15) in close proximity to the air bag deployment location, an empty seat, an inanimate object (17) disposed in said seat, a pet (13) disposed in said seat, and an empty seat.

10

**37.** Apparatus according to claim 35, wherein:

15      (a) the occupied seat (O) state corresponds to the scenarios of a person seated in said seat, a person seated in said seat holding a grocery bag (18), a child in a forward-facing child seat (20) disposed in said seat, a child standing in said seat at a distance from the air bag deployment location, and a pet (13) disposed in said seat;  
    (b) the rear-facing child seat (RFCS) state corresponds to the scenario of a child in a rear-facing child seat disposed in said seat;  
    (c) the out-of-position passenger (OOP) state corresponds to the scenario of a person positioned in close proximity to the air bag deployment location;  
20      (d) the inanimate object (IO) state corresponds to the scenario of an inanimate object disposed in said seat; and  
    (e) the empty seat (E) state corresponds to the scenario of an empty seat.

25      **38.** Apparatus according to claim 33, wherein said plurality of sensors is selected from the group consisting of infrared sensors, ultrasound sensors, weight sensors, microwave sensors, capacitance sensors, light sensors, and laser sensors.

30      **39.** Apparatus according to claim 33, wherein said signal features include indicia of (a) motion, (b) frequency of motion, (c) levels of motion, (d) difference in motion levels, (e) distance, (f) relative distance, (g) thermal levels, and (h) difference in thermal levels.

40      **40.** Apparatus according to claim 33, wherein said fused features include indicia of (a) temperature, (b) temperature differences, (c) approximate size of objects, (d) distance, (e) motion, (f) frequency of motion, and (g) levels of motion.

35      **41.** Apparatus according to claim 33, wherein said associating means comprises:

45      (i) means using predetermined confidence values and said signal features and fused features to produce (1) a decision confidence matrix of confidence values for the signal features of the signals of each sensor, and (2) a decision confidence matrix of confidence values for said fused features;  
40      (ii) means using the empirical relationships to calculate a decision confidence vector corresponding to each of said decision confidence matrices;  
    (iii) means weighing each decision confidence vector in a predetermined manner to produce weighted vectors; and  
    (iv) means combining the weighted vectors to produce a resultant vector having state values from which the feature state value is selected.

42      **42.** Apparatus according to claim 33, wherein said set of state change criteria includes consideration of previous feature state values and previous current state values.

50      **43.** Apparatus according to claim 33, wherein the subset of said predetermined set of state values, for which said passive restraint system is to be de-activated, includes state values corresponding to a rear-facing child seat state, an empty seat state, an inanimate object state, and an out-of-position state.

55      **44.** Apparatus according to claim 33, wherein said passive restraint system includes a single canister air bag deployment system.

**45.** Apparatus according to claim 33, wherein said passive restraint system includes a multi-canister air bag deployment system capable of partially pressurizing an air bag to various degrees of pressure.



**EP 0 757 635 B1**

46. Apparatus according to claim 33, further comprising means for modifying said confidence levels over time to correspond to changes in environmental conditions of the vehicle.
- 5 47. Apparatus according to claim 33, wherein said sensing means includes an ultrasound sensor transmitting ultrasonic pulses and receiving ultrasonic return signals.
48. Apparatus according to claim 47, further comprising varying means for varying the transmission times between said ultrasonic pulses.
- 10 49. Apparatus according to claim 38, wherein said means for sensing includes two infrared detectors placed close to each other and separated by a baffle.
50. Apparatus according to claim 49, wherein said sensing means further includes a multi-element Fresnel lens focusing one detector on the seat back of the passenger seat and focusing the other detector on the seat surface  
15 of the passenger seat.
51. Apparatus according to claim 39, wherein said indicia of motion include indicia of lateral motion and longitudinal motion.
- 20 52. Apparatus as recited in claim 33, wherein said plurality of sensors of element (a) include:
- (i) a first infrared detector generating a first raw data signal;
  - (ii) a second infrared detector generating a second raw data signal; and
  - (iii) at least one ultrasound detector generating at least one third raw data signal;
- 25 and wherein said evaluating means (b) includes:
- (i) means processing said first and second raw data signals and for developing a first set of signals representing a first group of signal features and defining an infrared feature vector signal;
  - 30 (ii) means processing said third raw data signal(s) and for developing a second set of signals representing a second group of signal features and defining at least one ultrasound feature vector signal;
  - (iii) means selecting a subset of said first group of signals to develop a third group of signal features defining an infrared feature vector subset signal; and
  - 35 (iv) means selecting a subset of said second group of signal features to develop a fourth group of signal features defining at least one ultrasound feature vector subset signal.
53. Apparatus as recited in claim 52 wherein said combining means includes processing means for processing said infrared feature vector subset signal and said ultrasound feature vector subset signal(s) to develop a fused feature vector signal.
- 40 54. Apparatus as recited in claim 53, wherein said processing means for processing said infrared feature vector subset signal and said ultrasound feature vector subset signal(s) includes :
- 45 (a) means correlating a first subset of said third group of signal features with a first subset of said fourth group of signal features and developing an infrared spatial frequency components signal;
  - (b) means processing a second subset of said third group of signal features with a second subset of said fourth group of signal features and developing an infrared first absolute surface temperature signal, an infrared second absolute surface temperature signal, and an infrared differential absolute surface temperature signal;
  - 50 (c) means processing a third subset of said third group of signal features with a third subset of said fourth group of signal features and developing at least one infrared/ultrasound motion level correlation signal, an infrared/ultrasound motion level temporal correlation signal, and an infrared/ultrasound motion frequency correlation signal; and
  - 55 (d) the infrared spatial frequency components signal, the infrared first absolute surface temperature signal, the infrared second absolute surface temperature signal, the infrared differential absolute surface temperature signal, the infrared/ultrasound motion level correlation signal(s), the infrared/ultrasound motion level temporal correlation signal(s), and the infrared/ultrasound motion frequency correlation signal(s) are combined to form said fused feature vector signal.

**EP 0 757 635 B1**

55. Apparatus as recited in claim 54, wherein the signals representing the first group of said signal features include a first infrared lateral motion frequency signal, a first infrared thermal temporal signal, a first infrared thermal level signal, a first infrared lateral motion temporal signal, a first infrared lateral motion level signal, an infrared longitudinal motion level signal, an infrared differential motion level signal, an infrared differential motion temporal signal, an infrared differential motion frequency signal, a second infrared lateral motion frequency signal, a second infrared thermal temporal signal, a second infrared thermal level signal, a second infrared lateral motion temporal signal, and a second infrared lateral motion level signal.
56. Apparatus as recited in claim 55, wherein the signals representing the second group of said signal features include at least one of: an absolute range signal, a first return level rate of change signal, a first return level signal, an absolute range-1st return signal, a range motion signal, a range motion rate of change signal, a range motion temporal signal, a range motion frequency signal, a relative range level rate of change signal, a relative range level signal, a relative range value signal, a multipath triangulation signal, and an air temperature signal.
57. Apparatus as recited in claim 56, wherein the signals representing the third group of said signal features include the first infrared lateral motion frequency signal, the first infrared thermal level signal, the first infrared lateral motion temporal signal, the infrared differential motion frequency signal, the second infrared lateral motion frequency signal, the second infrared thermal level signal, the second infrared lateral motion temporal signal, and the infrared differential motion frequency signal.
58. Apparatus as recited in claim 57, wherein the signals representing the fourth group of said signal features include at least one of: the absolute range signal, the absolute range-1st return signal, the range motion temporal signal, the range motion frequency signal, the relative range value signal, and the multipath triangulation signal.
59. Apparatus as recited in claim 58, wherein the signals representing the first subset of said third group includes the first infrared lateral motion frequency signal, the second infrared lateral motion frequency signal, and the infrared differential motion frequency signal.
60. Apparatus as recited in claim 59, wherein the signals representing second subset of said third group include the first infrared thermal level signal and the second infrared thermal level signal.
61. Apparatus as recited in claim 60, wherein the signals representing the third subset of said third group include the first infrared lateral motion frequency signal, the second infrared lateral motion frequency signal, the first infrared lateral motion temporal signal, and the second infrared lateral motion temporal signal.
62. Apparatus as recited in claim 61, wherein the signals representing the first subset of said fourth group include at least one of: the absolute range signal, the absolute range-1st return signal, the relative range value signal, and the multipath triangulation signal.
63. Apparatus as recited in claim 62, wherein the signals representing the second subset of said fourth group include at least one of: the absolute range signal, and the absolute range-1st return signal.
64. Apparatus as recited in claim 63, wherein the signals representing the third subset of said fourth group include at least one of: the range motion temporal signal and range motion frequency signal.
65. An application specific integrated circuit device processing sensory input signals received from sensors adapted to sense the characteristics of occupancy of a particular passenger seat within a vehicle, and determining whether or not to de-activate a vehicle's passenger passive restraint system as a function of a current state value determined by comparing measured signal features to a predetermined set of confidence values and empirical relationships obtained using various known occupancy scenarios and a set of state change criteria, comprising in one or more chips:
- (a) means evaluating said input signals to determine a plurality of signal features;
  - (b) means combining certain ones of said signal features to obtain a plurality of fused features;
  - (c) means associating said signal features and said fused features with the confidence values and the empirical relationships to determine a feature state value;
  - (d) means identifying the feature state value as the current state value corresponding to one of the various known occupancy scenarios if the set of state change criteria is met; and

**EP 0 757 635 B1**

(e) means generating a de-activate signal if said current state value is one of a predetermined set of state values for which said passive restraint system is to be de-activated.

**5 Patentansprüche**

1. Verfahren, das bestimmt, ob das passive Fahrgast-Rückhaltesystem (4) eines Fahrzeugs deaktiviert werden soll oder nicht, als Funktion eines aktuellen Zustandswerts, der durch Vergleichen gemessener Signalmerkmale mit einer vorbestimmten Menge von Konfidenzwerten bestimmt wird, und empirischer Beziehungen, die unter Verwendung verschiedener bekannter Besetzungsszenarien (E, O, IO, RFCS, OOP) gewonnen werden, und einer Menge von Zustandsänderungskriterien, mit den folgenden Schritten:

(a) Messen der Eigenschaften der Besetzung eines bestimmten Fahrgastsitzes in dem Fahrzeug unter Verwendung mehrerer funktionsmäßig dem Fahrgastsitz zugeordneter Sensoren (24, 26) und Entwickeln einer Menge entsprechender elektrischer Signale (70, 71, 75);

(b) Bewerten der elektrischen Signale, um mehrere in jedem der Signale enthaltene Signalmerkmale (76, 78; 79, 88) zu bestimmen;

(c) Kombinieren bestimmter der Signalmerkmale (78, 79), um mehrere verbundene Merkmale (81) zu erhalten;

(d) Zuordnen der Signalmerkmale und der verbundenen Merkmale zu den Konfidenzwerten und den empirischen Beziehungen, um einen Merkmalszustandswert (83) zu bestimmen;

(e) Identifizieren des Merkmalszustandswerts (83) als den aktuellen Zustandswert, der einem der verschiedenen bekannten Besetzungsszenarien entspricht, wenn die Menge von Zustandsänderungskriterien erfüllt ist; und

(f) Erzeugen eines Deaktivierungssignals, wenn der aktuelle Zustandswert zu einer vorbestimmten Teilmenge von Zustandswerten gehört, für die das passive Rückhaltesystem deaktiviert werden soll.

2. Verfahren nach Anspruch 1, wobei das passive Fahrgast-Rückhaltesystem ein Airbag-Entfaltungssystem mit einem Airbag enthält, der für die Entfaltung in der Nähe des Fahrgastsitzes angeordnet ist und als Reaktion auf das Deaktivierungssignal deaktiviert werden kann.

3. Verfahren nach Anspruch 2, wobei die vorbestimmte Menge von Zustandswerten Werte enthält, die einem Zustand Sitz Leer (E), einem Zustand Sitz Besetzt (O), einem Zustand Nach Hinten Zeigender Kindersitz (RFCS), einem Zustand Fahrgast Außer Position (OOP) und einem Zustand Unbewegtes Objekt (IO) entsprechen.

4. Verfahren nach Anspruch 2, wobei die Besetzungsszenarien die folgenden enthalten: eine auf dem Fahrgastsitz sitzende Person, eine auf dem Sitz sitzende Person, die eine Einkaufstüte hält, ein Kind in einem nach hinten zeigenden Kindersitz, der sich auf dem Sitz befindet, ein Kind in einem nach vorne zeigenden Kindersitz, der sich auf dem Sitz befindet, eine Person, die sich in unmittelbarer Nähe des Airbag-Entfaltungsorts befindet, ein Kind, das auf dem Sitz in einem Abstand von dem Airbag-Entfaltungsort steht, ein stehendes Kind in unmittelbarer Nähe des Airbag-Entfaltungsorts, einen leeren Sitz, ein unbewegtes Objekt, das sich auf dem Sitz befindet, ein Haustier, das sich auf dem Sitz befindet, und einen leeren Sitz.

5. Verfahren nach Anspruch 3, wobei:

(a) der Zustand Sitz Besetzt (O) den Szenarien einer auf dem Sitz sitzenden Person, einer auf dem Sitz sitzenden Person, die eine Einkaufstüte hält, eines Kindes in einem nach vorne zeigenden Kindersitz, der sich auf dem Sitz befindet, eines Kindes, das auf dem Sitz in einem Abstand von dem Airbag-Entfaltungsort steht, und eines Haustiers, das sich auf dem Sitz befindet, entspricht;

(b) der Zustand Nach Hinten Zeigender Kindersitz (RFCS) dem Szenario eines Kindes in einem nach hinten zeigenden Kindersitz, der sich auf dem Sitz befindet, entspricht;

(c) der Zustand Fahrgast Außer Position (OOP) dem Szenario einer Person, die sich in unmittelbarer Nähe

**EP 0 757 635 B1**

des Airbag-Entfaltungsorts befindet, entspricht;

(d) der Zustand Unbewegtes Objekt (IO) dem Szenario eines auf dem Sitz befindlichen unbewegten Objekts entspricht; und

(e) der Zustand Sitz Leer (E) dem Szenario eines leeren Sitzes entspricht.

6. Verfahren nach Anspruch 1, wobei die mehreren Sensoren aus der Gruppe bestehend aus Infrarotsensoren, Ultraschallsensoren, Gewichtssensoren, Mikrowellensensoren, Kapazitätssensoren, Lichtsensoren und Lasersensoren ausgewählt werden.

7. Verfahren nach Anspruch 1, wobei zu den Signalmerkmalen Anzeigen von (a) Bewegung, (b) Bewegungsfrequenz, (c) Bewegungsgraden, (d) Unterschieden in Bewegungsgraden, (e) Abstand, (f) relativem Abstand, (g) thermischen Werten und (h) Unterschieden in thermischen Werten gehören.

8. Verfahren nach Anspruch 1, wobei zu den verbundenen Merkmalen Anzeigen von (a) Temperatur, (b) Temperaturdifferenzen, (c) ungefähre Größe von Objekten, (d) Abstand, (e) Bewegung, (f) Bewegungsfrequenz und (g) Bewegungsgraden gehören.

9. Verfahren nach Anspruch 1, wobei der Schritt (d) des Zuordnens die folgenden Unterschritte umfaßt:

(i) Verwenden vorbestimmter Konfidenzwerte und der Signalmerkmale und verbundener Merkmale, um (1) eine Entscheidungskonfidenzmatrix von Konfidenzwerten für die Signalmerkmale der Signale jedes Sensors und (2) eine Entscheidungskonfidenzmatrix von Konfidenzwerten für die verbundenen Merkmale zu erzeugen;

(ii) Verwenden der empirischen Beziehungen, um entsprechend jeder der Entscheidungskonfidenzmatrizen einen Entscheidungskonfidenzvektor zu berechnen;

(iii) Gewichten jedes Entscheidungskonfidenzvektors auf vorbestimmte Weise, um gewichtete Vektoren zu erzeugen; und

(iv) Kombinieren der gewichteten Vektoren, um einen resultierenden Vektor mit Zustandswerten, aus denen der Merkmalszustandswert ausgewählt wird, zu erzeugen.

10. Verfahren nach Anspruch 1, wobei die Menge von Zustandsänderungskriterien das Beachten vorheriger Merkmalszustandswerte und vorheriger aktueller Zustandswerte umfaßt.

11. Verfahren nach Anspruch 1, wobei die Teilmenge der vorbestimmten Menge von Zustandswerten, für die das passive Rückhaltesystem deaktiviert werden soll, Zustandswerte enthält, die einem Zustand Nach Hinten Zeigender Kindersitz, einem Zustand Sitz Leer, einem Zustand Unbewegtes Objekt und einem Zustand Außer Position entsprechen.

12. Verfahren nach Anspruch 1, wobei das passive Rückhaltesystem ein Airbag-Entfaltungssystem mit einem einzigen Gasgenerator enthält.

13. Verfahren nach Anspruch 1, wobei das passive Rückhaltesystem ein Airbag-Entfaltungssystem mit mehreren Gasgeneratoren enthält, das in der Lage ist, einen Airbag auf verschiedene Drücke aufzublasen.

14. Verfahren nach Anspruch 9, weiterhin mit dem Schritt des Modifizierens der Konfidenzwerte über die Zeit hinweg, um Änderungen der Umgebungsbedingungen des Fahrzeugs zu entsprechen.

15. Verfahren nach Anspruch 1, wobei der Schritt des Messens das Verwenden eines Ultraschallsensors zum Senden von Ultraschallimpulsen und zum Empfangen von Ultraschall-Rücksignalen umfaßt.

16. Verfahren nach Anspruch 15, weiterhin mit dem Schritt des Veränderns der Sendezeiten zwischen den Ultraschallimpulsen.

17. Verfahren nach Anspruch 6, wobei der Schritt des Messens das Verwenden zweier Infrarotdetektoren umfaßt, die

**EP 0 757 635 B1**

nahe beieinander angeordnet sind und von einer Blende getrennt werden.

5 **18.** Verfahren nach Anspruch 17, wobei der Schritt des Messens weiterhin das Verwenden einer mehrelementigen Fresnel-Linse zum Fokussieren eines Detektors auf eine Sitzlehne des Fahrgastsitzes und zum Fokussieren des anderen Detektors auf eine Sitzoberfläche des Fahrgastsitzes umfaßt.

**19.** Verfahren nach Anspruch 7, wobei die Anzeigen von Bewegung Anzeigen einer seitlichen Bewegung und einer Längsbewegung umfassen.

10 **20.** Verfahren nach Anspruch 1, wobei die mehreren Sensoren folgendes enthalten:

(a) einen ersten Infrarotdetektor, der ein erstes Rohdaten-Signal erzeugt;

15 (b) einen zweiten Infrarotdetektor, der ein zweites Rohdaten-Signal erzeugt; und

(c) einen Ultraschalldetektor, der ein drittes Rohdaten-Signal erzeugt;

und wobei der Bewertungsschritt (b) folgendes umfaßt:

20 (i) Verarbeiten des ersten und des zweiten Rohdaten-Signals, um eine erste Menge von Signalen zu entwickeln, die eine erste Gruppe von Signalmerkmalen darstellt und ein Infrarotmerkmalvektorsignal definiert;

25 (ii) Verarbeiten des dritten Rohdaten-Signals, um eine zweite Menge von Signalen zu entwickeln, die eine zweite Gruppe von Signalmerkmalen darstellt und ein Ultraschallmerkmalvektorsignal definiert;

(iii) Auswählen einer Teilmenge der ersten Gruppe von Signalmerkmalen, um eine dritte Gruppe von Signalmerkmalen zu entwickeln, die ein Infrarotmerkmalvektor-Teilmengensignal definiert; und

30 (iv) Auswählen einer Teilmenge der zweiten Gruppe von Signalmerkmalen, um eine vierte Gruppe von Signalmerkmalen zu entwickeln, die ein Ultraschallmerkmalvektor-Teilmengensignal definiert.

35 **21.** Verfahren nach Anspruch 20, wobei der Schritt des Kombinierens das Verarbeiten des Infrarotmerkmalvektor-Teilmengensignals und des Ultraschallmerkmalvektor-Teilmengensignals umfaßt, um ein verbundenes Merkmalvektorsignal zu entwickeln.

**22.** Verfahren nach Anspruch 21, wobei die Verarbeitung des Infrarotmerkmalvektor-Teilmengensignals und des Ultraschallmerkmalvektor-Teilmengensignals folgendes umfaßt:

40 (a) Korrelieren einer ersten Teilmenge der dritten Gruppe von Signalmerkmalen mit einer ersten Teilmenge der vierten Gruppe von Signalmerkmalen, um ein Signal der räumlichen Infrarot-Frequenzkomponenten zu entwickeln;

45 (b) Verarbeiten einer zweiten Teilmenge der dritten Gruppe von Signalmerkmalen mit einer zweiten Teilmenge der vierten Gruppe von Signalmerkmalen, um ein Signal der ersten absoluten Infrarot-Oberflächentemperatur, ein Signal der zweiten absoluten Infrarot-Oberflächentemperatur und ein Differenzsignal der absoluten Infrarot-Oberflächentemperatur zu entwickeln;

50 (c) Verarbeiten einer dritten Teilmenge der dritten Gruppe von Signalmerkmalen mit einer dritten Teilmenge der vierten Gruppe von Signalmerkmalen, um ein Signal der Infrarot/Ultraschall-Bewegungsgradkorrelation, ein Signal der zeitlichen Infrarot/Ultraschall-Bewegungsgradkorrelation und ein Signal der Infrarot/Ultraschall-Bewegungsfrequenzkorrelation zu entwickeln; und

55 (d) Kombinieren des Signals der räumlichen Infrarot-Frequenzkomponenten, des Signals der ersten absoluten Infrarot-Oberflächentemperatur, des Signals der zweiten absoluten Infrarot-Oberflächentemperatur, des Differenzsignals der absoluten Infrarot-Oberflächentemperatur, des der Signals der Infrarot/Ultraschall-Bewegungsgradkorrelation, des Signals zeitlichen Infrarot/Ultraschall-Bewegungsgradkorrelation und des Signals der Infrarot-/Ultraschall-Bewegungsfrequenzkorrelation, um das verbundene Merkmalvektorsignal zu bilden.

**EP 0 757 635 B1**

23. Verfahren nach Anspruch 22, wobei die Signale, die die erste Gruppe von Signalmerkmalen darstellen, ein erstes Infrarotsignal der seitlichen Bewegungsfrequenz, ein erstes zeitliches thermisches Infrarotsignal, ein erstes Infrarotsignal des thermischen Pegels, ein erstes zeitliches Infrarotsignal der seitlichen Bewegung, ein erstes Infrarotsignal des seitlichen Bewegungsgrads, ein Infrarotsignal des Längsbewegungsgrads, ein Infrarot-Differenz-Bewegungsgradsignal, ein zeitliches Infrarot-Differenz-Bewegungssignal, ein Infrarot-Differenz-Bewegungsfrequenzsignal, ein zweites Infrarotsignal der seitlichen Bewegungsfrequenz, ein zweites zeitliches thermisches Infrarotsignal, ein zweites Infrarotsignal des thermischen Pegels, ein zweites zeitliches Infrarotsignal der seitlichen Bewegung und ein zweites Infrarotsignal des seitlichen Bewegungsgrads umfassen.
24. Verfahren nach Anspruch 23, wobei die Signale, die die zweite Gruppe von Signalmerkmalen darstellen, ein Absolutbereichssignal, ein erstes Rück-Pegeländerungsratensignal, ein erstes Rück-Pegelsignal, ein Erst-Rück-Absolutbereichssignal, ein Bewegungsbereichssignal, ein Bewegungsbereichs-Änderungsratensignal, ein zeitliches Bewegungsbereichssignal, ein Bewegungsbereichs-Frequenzsignal, ein Relativ-Bereichs-Pegeländerungsratensignal, ein Relativ-Bereichs-Pegelsignal, ein Relativ-Bereichs-Wertsignal, ein Mehrwege-Triangulationssignal und ein Lufttemperatursignal umfassen.
25. Verfahren nach Anspruch 24, wobei die Signale, die die dritte Gruppe von Signalmerkmalen darstellen, das erste Infrarotsignal der seitlichen Bewegungsfrequenz, das erste Infrarotsignal des thermischen Pegels, das erste zeitliche Infrarotsignal der seitlichen Bewegung, das Infrarot-Differenz-Bewegungsfrequenzsignal, das zweite Infrarotsignal der seitlichen Bewegungsfrequenz, das zweite Infrarotsignal des thermischen Pegels, das zweite zeitliche Infrarotsignal der seitlichen Bewegung und das Infrarot-Differenz-Bewegungsfrequenzsignal umfassen.
26. Verfahren nach Anspruch 25, wobei die Signale, die die vierte Gruppe von Signalmerkmalen darstellen, das Absolutbereichssignal, das Erst-Rück-Absolutbereichssignal, das zeitliche Bewegungsbereichssignal, das Bewegungsbereichs-Frequenzsignal, das Relativ-Bereichs-Wertsignal und das Mehrwege-Triangulationssignal umfassen.
27. Verfahren nach Anspruch 26, wobei die Signale, die die erste Teilmenge der dritten Gruppe darstellen, das erste Infrarotsignal der seitlichen Bewegungsfrequenz, das zweite Infrarotsignal der seitlichen Bewegungsfrequenz und das Infrarot-Differenz-Bewegungsfrequenzsignal umfassen.
28. Verfahren nach Anspruch 27, wobei die Signale, die die zweite Teilmenge der dritten Gruppe darstellen, das erste Infrarotsignal des thermischen Pegels und das zweite Infrarotsignal des thermischen Pegels umfassen.
29. Verfahren nach Anspruch 28, wobei die Signale, die die dritte Teilmenge der dritten Gruppe darstellen, das erste Infrarotsignal der seitlichen Bewegungsfrequenz, das zweite Infrarotsignal der seitlichen Bewegungsfrequenz, das erste zeitliche Infrarotsignal der seitlichen Bewegung und das zweite zeitliche Infrarotsignal der seitlichen Bewegung umfassen.
30. Verfahren nach Anspruch 29, wobei die Signale, die die erste Teilmenge der vierten Gruppe darstellen, das Absolutbereichssignal, das Erst-Rück-Absolutbereichssignal, das Relativ-Bereichs-Wertsignal und das Mehrwege-Triangulationssignal umfassen.
31. Verfahren nach Anspruch 30, wobei die Signale, die die zweite Teilmenge der vierten Gruppe darstellen, das Absolutbereichssignal und das Erst-Rück-Absolutbereichssignal umfassen.
32. Verfahren nach Anspruch 31, wobei die Signale, die die dritte Teilmenge der vierten Gruppe darstellen, das zeitliche Bewegungsbereichssignal und das Bewegungsbereichs-Frequenzsignal umfassen.
33. Vorrichtung, die bestimmt, ob das passive Fahrgast-Rückhaltesystem (4) eines Fahrzeugs als Funktion eines aktuellen Zustandswerts, der durch Vergleichen gemessener Signalmerkmale mit einer vorbestimmten Menge von Konfidenzwerten bestimmt wird, und empirischer Beziehungen, die unter Verwendung verschiedener bekannter Besetzungsszenarien (E, O, IO, RFCS, OOP) gewonnen werden, und einer Menge von Zustandsänderungskriterien gesteuert werden soll oder nicht, mit den folgenden Merkmalen:
- (a) ein Mittel, das die Eigenschaften der Besetzung eines Fahrgastsitzes (12) in dem Fahrzeug unter Verwendung mehrerer funktionsmäßig dem Fahrgastsitz zugeordneter Sensoren mißt (24, 26), und eine Menge entsprechender elektrischer Signale (70, 71, 75);

**EP 0 757 635 B1**

- (b) ein Mittel, das die elektrischen Signale bewertet (74, 77), um mehrere in jedem der Signale enthaltene Signalmerkmale zu bestimmen;
- 5 (c) ein Mittel, das bestimmte der Signalmerkmale kombiniert (80), um mehrere verbundene Merkmale zu erhalten;
- (d) ein Mittel, das die Signalmerkmale und die verbundenen Merkmale den Konfidenzwerten und den empirischen Beziehungen zuordnet (82), um einen Merkmalszustandswert zu bestimmen;
- 10 (e) ein Mittel, das den Merkmalszustandswert als den aktuellen Zustandswert identifiziert (84), der einem der verschiedenen bekannten Besetzungsszenarien entspricht, wenn die Menge von Zustandsänderungskriterien erfüllt ist; und
- 15 (f) ein Mittel, das ein Steuerzustandssignal erzeugt (84), wenn der aktuelle Zustandswert zu einer vorbestimmten Menge von Zustandswerten gehört, für die das passive Rückhaltesystem (4), einschließlich einer möglichen Deaktivierung des Rückhaltesystems, gesteuert werden soll.
34. Vorrichtung nach Anspruch 33, wobei das passive Fahrgast-Rückhaltesystem ein Airbag-Entfaltungssystem enthält, das einen Airbag aufweist, der für die Entfaltung in der Nähe des Fahrgastsitzes vorgesehen ist und als Reaktion auf das Steuerzustandssignal deaktiviert oder gesteuert aufgeblasen werden kann.
- 20 35. Vorrichtung nach Anspruch 34, wobei die vorbestimmte Menge von Zustandswerten Werte enthält, die einem Zustand Sitz Leer (E), einem Zustand Sitz Besetzt (O), einem Zustand Nach Hinten Zeigender Kindersitz (RFCS), einem Zustand Fahrgast Außer Position (OOP) und einem Zustand Unbewegtes Objekt (IO) entsprechen.
- 25 36. Vorrichtung nach Anspruch 34, wobei die Besetzungsszenarien die folgenden enthalten: eine auf dem Fahrgastsitz (12) sitzende Person (8), eine auf dem Sitz sitzende Person, die eine Einkaufstüte hält (18), ein Kind in einem nach hinten zeigenden Kindersitz (11), der sich auf dem Sitz befindet, ein Kind in einem nach vorne zeigenden Kindersitz (20), der sich auf dem Sitz befindet, eine Person, die sich in unmittelbarer Nähe des Airbag-Entfaltungsorts befindet, ein Kind, das auf dem Sitz in einem Abstand von dem Airbag-Entfaltungsort steht, ein stehendes Kind (15) in unmittelbarer Nähe des Airbag-Entfaltungsorts, einen leeren Sitz, ein unbewegtes Objekt (17), das sich auf dem Sitz befindet, ein Haustier (13), das sich auf dem Sitz befindet, und einen leeren Sitz.
- 30 37. Vorrichtung nach Anspruch 35, wobei:
- 35 (a) der Zustand Sitz Besetzt (O) den Szenarien einer auf dem Sitz sitzenden Person, einer auf dem Sitz sitzenden Person, die eine Einkaufstüte hält (18), eines Kindes auf einem nach vorne zeigenden Kindersitz (20), der sich auf dem Sitz befindet, eines Kindes, das auf dem Sitz in einem Abstand von dem Airbag-Entfaltungsort steht, und eines Haustiers (13), das sich auf dem Sitz befindet, entspricht;
- 40 (b) der Zustand Nach Hinten Zeigender Kindersitz (RFCS) dem Szenario eines Kindes in einem nach hinten zeigenden Kindersitz, der sich auf dem Sitz befindet, entspricht;
- (c) der Zustand Fahrgast Außer Position (OOP) dem Szenario einer Person, die sich in unmittelbarer Nähe des Airbag-Entfaltungsorts befindet, entspricht;
- 45 (d) der Zustand Unbewegtes Objekt (IO) dem Szenario eines auf dem Sitz befindlichen unbewegten Objekts entspricht; und
- 50 (e) der Zustand Sitz Leer (E) dem Szenario eines leeren Sitzes entspricht.
38. Vorrichtung nach Anspruch 33, wobei die mehreren Sensoren aus der Gruppe bestehend aus Infrarotsensoren, Ultraschallsensoren, Gewichtssensoren, Mikrowellensensoren, Kapazitätssensoren, Lichtsensoren und Lasersensoren ausgewählt werden.
- 55 39. Vorrichtung nach Anspruch 33, wobei zu den Signalmerkmalen Anzeigen von (a) Bewegung, (b) Bewegungsfrequenz, (c) Bewegungsgraden, (d) Unterschieden in Bewegungsgraden, (e) Abstand, (f) relativem Abstand, (g) thermischen Werten und (h) Unterschieden in thermischen Werten gehören.

**EP 0 757 635 B1**

40. Vorrichtung nach Anspruch 33, wobei zu den verbundenen Merkmalen Anzeigen von (a) Temperatur, (b) Temperaturdifferenzen, (c) ungefährer Größe von Objekten, (d) Abstand, (e) Bewegung, (f) Bewegungsfrequenz und (g) Bewegungsgraden gehören.
- 5 41. Vorrichtung nach Anspruch 33, wobei das Zuordnungsmittel folgendes umfaßt:
- (i) ein Mittel, das vorbestimmte Konfidenzwerte und die Signalmerkmale und verbundenen Merkmale verwendet, um (1) eine Entscheidungskonfidenzmatrix von Konfidenzwerten für die Signalmerkmale der Signale jedes Sensors und (2) eine Entscheidungskonfidenzmatrix von Konfidenzwerten für die verbundenen Merkmale zu erzeugen;
- 10 (ii) ein Mittel, das die empirischen Beziehungen verwendet, um entsprechend jeder der Entscheidungskonfidenzmatrizen einen Entscheidungskonfidenzvektor zu berechnen;
- 15 (iii) ein Mittel, das jeden Entscheidungskonfidenzvektor auf vorbestimmte Weise gewichtet, um gewichtete Vektoren zu erzeugen; und
- (iv) ein Mittel, das die gewichteten Vektoren kombiniert, um einen resultierenden Vektor mit Zustandswerten, aus denen der Merkmalszustandswert ausgewählt wird, zu erzeugen.
- 20 42. Vorrichtung nach Anspruch 33, wobei die Menge von Zustandsänderungskriterien das Beachten vorheriger Merkmalszustandswerte und vorheriger aktueller Zustandswerte umfaßt.
- 25 43. Vorrichtung nach Anspruch 33, wobei die Teilmenge der vorbestimmten Menge von Zustandswerten, für die das passive Rückhaltesystem deaktiviert werden soll, Zustandswerte enthält, die einem Zustand Nach Hinten Zeigender Kindersitz, einem Zustand Sitz Leer, einem Zustand Unbewegtes Objekt und einem Zustand Außer Position entsprechen.
- 30 44. Vorrichtung nach Anspruch 33, wobei das passive Rückhaltesystem ein Airbag-Entfaltungssystem mit einem einzigen Gasgenerator enthält.
45. Vorrichtung nach Anspruch 33, wobei das passive Rückhaltesystem ein Airbag-Entfaltungssystem mit mehreren Gasgeneratoren enthält, das in der Lage ist, einen Airbag auf verschiedene Drücke aufzublasen.
- 35 46. Vorrichtung nach Anspruch 33, weiterhin mit einem Mittel zum Modifizieren der Konfidenzwerte über die Zeit hinweg, um Änderungen der Umgebungsbedingungen des Fahrzeugs zu entsprechen.
- 40 47. Vorrichtung nach Anspruch 33, wobei das Meßmittel einen Ultraschallsensor umfaßt, der Ultraschallimpulse sendet und Ultraschall-Rücksignale empfängt.
48. Vorrichtung nach Anspruch 47, weiterhin mit einem Veränderungsmittel, das die Sendezeiten zwischen den Ultraschallimpulsen verändert.
49. Vorrichtung nach Anspruch 38, wobei das Mittel zum Messen zwei Infrarotdetektoren umfaßt, die nahe beieinander angeordnet sind und von einer Blende getrennt werden.
- 50 50. Vorrichtung nach Anspruch 49, wobei das Meßmittel weiterhin eine mehrelementige Fresnel-Linse umfaßt, die einen Detektor auf die Sitzlehne des Fahrgastsitzes und den anderen Detektor auf die Sitzoberfläche des Fahrgastsitzes fokussiert.
51. Vorrichtung nach Anspruch 39, wobei die Anzeigen von Bewegung Anzeigen einer seitlichen Bewegung und einer Längsbewegung umfassen.
- 55 52. Vorrichtung nach Anspruch 33, wobei die mehreren Sensoren des Elements (a) folgendes enthalten:
- (i) einen ersten Infrarotdetektor, der ein erstes Rohdaten-Signal erzeugt;
- (ii) einen zweiten Infrarotdetektor, der ein zweites Rohdaten-Signal erzeugt; und



**EP 0 757 635 B1**

(iii) mindestens einen Ultraschalldetektor, der ein drittes Rohdaten-Signal erzeugt;

und wobei das Bewertungsmittel (b) folgendes umfaßt:

- 5 (i) ein Mittel, das das erste und das zweite Rohdaten-Signal verarbeitet und eine erste Menge von Signalen entwickelt, die eine erste Gruppe von Signalmerkmalen darstellt und ein Infrarotmerkmalvektorsignal definiert;
- (ii) ein Mittel, das das dritte Rohdaten-Signal bzw. die dritten Rohdaten-Signale verarbeitet und eine zweite Menge von Signalen entwickelt, die eine zweite Gruppe von Signalmerkmalen darstellt und mindestens ein  
10 Ultraschallmerkmalvektorsignal definiert;
- (iii) ein Mittel, das eine Teilmenge der ersten Gruppe von Signalen auswählt, um eine dritte Gruppe von Signalmerkmalen zu entwickeln, die ein Infrarotmerkmalvektor-Teilmengensignal definiert; und
- 15 (iv) ein Mittel, das eine Teilmenge der zweiten Gruppe von Signalmerkmalen auswählt, um eine vierte Gruppe von Signalmerkmalen zu entwickeln, die mindestens ein Ultraschallmerkmalvektor-Teilmengensignal definiert.

53. Vorrichtung nach Anspruch 52, wobei das Kombinerungsmittel ein Verarbeitungsmittel zum Verarbeiten des Infrarotmerkmalvektor-Teilmengensignals und des Ultraschallmerkmalvektor-Teilmengensignals bzw. der Ultraschallmerkmalvektor-Teilmengensignale umfaßt, um ein verbundenes Merkmalvektorsignal zu entwickeln.

20

54. Vorrichtung nach Anspruch 53, wobei das Verarbeitungsmittel zum Verarbeiten des Infrarotmerkmalvektor-Teilmengensignals und des Ultraschallmerkmalvektor-Teilmengensignals folgendes enthält:

25

- (a) ein Mittel, das eine erste Teilmenge der dritten Gruppe von Signalmerkmalen mit einer ersten Teilmenge der vierten Gruppe von Signalmerkmalen korreliert und ein Signal der räumlichen Infrarot-Frequenzkomponenten entwickelt;
- 30 (b) ein Mittel, das eine zweite Teilmenge der dritten Gruppe von Signalmerkmalen mit einer zweiten Teilmenge der vierten Gruppe von Signalmerkmalen verarbeitet und ein Signal der ersten absoluten Infrarot-Oberflächentemperatur, ein Signal der zweiten absoluten Infrarot-Oberflächentemperatur und ein Differenzsignal der absoluten Infrarot-Oberflächentemperatur entwickelt;
- 35 (c) ein Mittel, das eine dritte Teilmenge der dritten Gruppe von Signalmerkmalen mit einer dritten Teilmenge der vierten Gruppe von Signalmerkmalen verarbeitet und mindestens ein Signal der Infrarot/ Ultraschall-Bewegungsgradkorrelation, ein Signal der zeitlichen Infrarot/Ultraschall-Bewegungsgradkorrelation und ein Signal der Infrarot/Ultraschall-Bewegungsfrequenzkorrelation entwickelt; und
- 40 (d) Kombinieren des Signals der räumlichen Infrarot-Frequenzkomponenten, des Signals der ersten absoluten Infrarot-Oberflächentemperatur, des Signals der zweiten absoluten Infrarot-Oberflächentemperatur, des Differenzsignals der absoluten Infrarot-Oberflächentemperatur, des/der Signale der Infrarot/Ultraschall-Bewegungsgradkorrelation, des/der Signale der zeitlichen Infrarot/Ultraschall-Bewegungsgradkorrelation und des/der Signale der Infrarot/Ultraschall-Bewegungsfrequenzkorrelation, um das verbundene Merkmalvektorsignal zu bilden.
- 45

55. Vorrichtung nach Anspruch 54, wobei die Signale, die die erste Gruppe der Signalmerkmale darstellen, ein erstes Infrarotsignal der seitlichen Bewegungsfrequenz, ein erstes zeitliches thermisches Infrarotsignal, ein erstes Infrarotsignal des thermischen Pegels, ein erstes zeitliches Infrarotsignal der seitlichen Bewegung, ein erstes Infrarotsignal des seitlichen Bewegungsgrads, ein Infrarotsignal des Längsbewegungsgrads, ein Infrarot-Differenz-Bewegungsgradsignal, ein zeitliches Infrarot-Differenz-Bewegungssignal, ein Infrarot-Differenz-Bewegungsfrequenzsignal, ein zweites Infrarotsignal der seitlichen Bewegungsfrequenz, ein zweites zeitliches thermisches Infrarotsignal, ein zweites Infrarotsignal des thermischen Pegels, ein zweites zeitliches Infrarotsignal der seitlichen Bewegung und ein zweites Infrarotsignal des seitlichen Bewegungsgrads umfassen.

50

55

56. Vorrichtung nach Anspruch 55, wobei die Signale, die die zweite Gruppe der Signalmerkmale darstellen, mindestens eines der folgenden umfassen: ein Absolutbereichssignal, ein erstes Rück-Pegeländerungssignal, ein erstes Rück-Pegelsignal, ein Erst-Rück-Absolutbereichssignal, ein Bewegungsbereichssignal, ein Bewegungsbe-

**EP 0 757 635 B1**

reichs-Änderungsratensignal, ein zeitliches Bewegungsbereichssignal, ein Bewegungsbereichs-Frequenzsignal, ein Relativ-Bereichs-Pegeländerungsratensignal, ein Relativ-Bereichs-Pegelsignal, ein Relativ-Bereichs-Wertsignal, ein Mehrwege-Triangulationssignal und ein Lufttemperatursignal.

- 5 57. Vorrichtung nach Anspruch 56, wobei die Signale, die die dritte Gruppe der Signalmerkmale darstellen, das erste Infrarotsignal der seitlichen Bewegungsfrequenz, das erste Infrarotsignal des thermischen Pegels, das erste zeitliche Infrarotsignal der seitlichen Bewegung, das Infrarot-Different-Bewegungsfrequenzsignal, das zweite Infrarotsignal der seitlichen Bewegungsfrequenz, das zweite Infrarotsignal des thermischen Pegels, das zweite zeitliche Infrarotsignal der seitlichen Bewegung und das Infrarot-Differenz-Bewegungsfrequenzsignal umfassen.
- 10 58. Vorrichtung nach Anspruch 57, wobei die Signale, die die vierte Gruppe der Signalmerkmale darstellen, mindestens eines der folgenden umfassen: das Absolutbereichssignal, das Erst-Rück-Absolutbereichssignal, das zeitliche Bewegungsbereichssignal, das Bewegungsbereichs-Frequenzsignal, das Relativ-Bereichs-Wertsignal und das Mehrwege-Triangulationssignal.
- 15 59. Vorrichtung nach Anspruch 58, wobei die Signale, die die erste Teilmenge der dritten Gruppe darstellen, das erste Infrarotsignal der seitlichen Bewegungsfrequenz, das zweite Infrarotsignal der seitlichen Bewegungsfrequenz und das Infrarot-Differenz-Bewegungsfrequenzsignal umfassen.
- 20 60. Vorrichtung nach Anspruch 59, wobei die Signale, die die zweite Teilmenge der dritten Gruppe darstellen, das erste Infrarotsignal des thermischen Pegels und das zweite Infrarotsignal des thermischen Pegels umfassen.
- 25 61. Vorrichtung nach Anspruch 60, wobei die Signale, die die dritte Teilmenge der dritten Gruppe darstellen, das erste Infrarotsignal der seitlichen Bewegungsfrequenz, das zweite Infrarotsignal der seitlichen Bewegungsfrequenz, das erste zeitliche Infrarotsignal der seitlichen Bewegung und das zweite zeitliche Infrarotsignal der seitlichen Bewegung umfassen.
- 30 62. Vorrichtung nach Anspruch 61, wobei die Signale, die die erste Teilmenge der vierten Gruppe darstellen, mindestens eines der folgenden umfassen: das Absolutbereichssignal, das Erst-Rück-Absolutbereichssignal, das Relativ-Bereichs-Wertsignal und das Mehrwege-Triangulationssignal.
- 35 63. Vorrichtung nach Anspruch 62, wobei die Signale, die die zweite Teilmenge der vierten Gruppe darstellen, mindestens eines der folgenden umfassen: das Absolutbereichssignal und das Erst-Rück-Absolutbereichssignal.
- 40 64. Vorrichtung nach Anspruch 63, wobei die Signale, die die dritte Teilmenge der vierten Gruppe darstellen, mindestens eines der folgenden umfassen: das zeitliche Bewegungsbereichssignal und das Bewegungsbereichs-Frequenzsignal.
- 45 65. Anwendungsspezifisches integriertes Schaltungselement, das Sensoreingangssignale verarbeitet, die aus Sensoren empfangen werden, die so ausgelegt sind, daß sie die Eigenschaften der Besetzung eines bestimmten Fahrgastsitzes in einem Fahrzeug messen, und bestimmt, ob das passive Fahrgast-Rückhaltesystem eines Fahrzeugs als Funktion eines aktuellen Zustandswerts, der durch Vergleichen gemessener Signalmerkmale mit einer vorbestimmten Menge von Konfidenzwerten bestimmt wird, und empirischer Beziehungen, die unter Verwendung verschiedener bekannter Besetzungsszenarien gewonnen werden, und einer Menge von Zustandsänderungskriterien deaktiviert werden soll oder nicht, das in einem oder mehreren Chips folgendes umfaßt:
- (a) ein Mittel, das die Eingangssignale bewertet, um mehrere Signalmerkmale zu bestimmen;
- 50 (b) ein Mittel, das bestimmte der Signalmerkmale kombiniert, um mehrere verbundene Merkmale zu erhalten;
- (c) ein Mittel, das die Signalmerkmale und die verbundenen Merkmale den Konfidenzwerten und den empirischen Beziehungen zuordnet, um einen Merkmalszustandswert zu bestimmen;
- 55 (d) ein Mittel, das den Merkmalszustandswert als den aktuellen Zustandswert identifiziert, der einem der verschiedenen bekannten Besetzungsszenarien entspricht, wenn die Menge von Zustandsänderungskriterien erfüllt ist; und
- (e) ein Mittel, das ein Deaktivierungssignal erzeugt, wenn der aktuelle Zustandswert zu einer vorbestimmten

**EP 0 757 635 B1**

Menge von Zustandswerten gehört, für die das passive Rückhaltesystem deaktiviert werden soll.

**Revendications**

5

1. Procédé pour déterminer s'il faut ou non désactiver un système de retenue passif (4) d'un passager d'un véhicule, en fonction d'une valeur d'état courante déterminée en comparant des caractéristiques de signaux mesurées à un ensemble prédéterminé de valeurs de confiance et de relations empiriques obtenues en utilisant divers scénarios d'occupation connus (E, O, IO, RFCS, OOP) ainsi qu'un ensemble de critères de changement d'état, comprenant les étapes consistant à :

10

(a) détecter les caractéristiques d'occupation d'un siège de passager particulier à l'intérieur du véhicule, en utilisant un certain nombre de détecteurs (24, 26) associés fonctionnellement au siège de passager et développant un ensemble de signaux électriques correspondants (70, 71, 75);

15

(b) évaluer ces signaux électriques pour déterminer un certain nombre de caractéristiques de signaux incluses dans chacun des signaux (76, 78 ; 79, 88) ;

(c) combiner certaines des caractéristiques de signaux (78, 79) pour obtenir un certain nombre de caractéristiques fusionnées (81) ;

20

(d) associer les caractéristiques de signaux et les caractéristiques fusionnées avec les valeurs de confiance et les relations empiriques, pour déterminer une valeur d'état caractéristique (83) ;

(e) identifier la valeur d'état caractéristique (83) comme la valeur d'état courante correspondant à l'un des divers scénarios d'occupation connus si l'on répond à l'ensemble de critères de changement d'état ; et

(f) générer un signal de désactivation si la valeur d'état courante est l'une d'un sous-ensemble prédéterminé de valeurs d'état pour lesquelles le système de retenue passif doit être désactivé.

25

2. Procédé selon la revendication 1, dans lequel

le système de retenue passif de passager comprend un système de déploiement de coussin d'air (« air bag ») comportant un coussin d'air placé pour se déployer à proximité du siège de passager et pouvant être désactivé en réponse au signal de désactivation.

30

3. Procédé selon la revendication 2, dans lequel

l'ensemble prédéterminé de valeurs d'état comprend des valeurs correspondant à un état de siège vide (E), un état de siège occupé (O), un état de siège d'enfant tourné vers l'arrière (RFCS), un état de passager hors de sa position (OOP) et un état d'objet inanimé (IO).

35

4. Procédé selon la revendication 2, dans lequel

les scénarios d'occupation comprennent une personne assise dans le siège de passager, une personne assise dans ce siège et tenant un sac à provisions, un enfant assis dans un siège d'enfant tourné vers l'arrière et disposé dans le siège, un enfant assis dans un siège d'enfant tourné vers l'avant et disposé dans le siège, une personne placée à proximité immédiate de l'emplacement de déploiement du coussin d'air ("air bag"), un enfant se tenant debout dans le siège à une certaine distance de l'emplacement de déploiement du coussin d'air, un enfant se tenant debout à proximité immédiate de l'emplacement de déploiement du coussin d'air, un siège vide, un objet inanimé disposé dans le siège, un animal domestique disposé dans le siège, et un siège vide.

45

5. Procédé selon la revendication 3, dans lequel :

50

(a) l'état de siège occupé (O) correspond aux scénarios d'une personne assise dans le siège, d'une personne assise dans ce siège et tenant un sac à provisions, d'un enfant assis dans un siège d'enfant tourné vers l'avant et disposé dans le siège, un enfant se tenant debout dans le siège à une certaine distance de l'emplacement de déploiement du coussin d'air, et un animal domestique disposé dans le siège ;

55

(b) l'état de siège d'enfant tourné vers l'arrière (RFCS) correspond au scénario d'un enfant placé dans un siège d'enfant tourné vers l'arrière et disposé dans le siège ;

(c) l'état de passager hors de sa position (OOP) correspond au scénario d'une personne placée à proximité immédiate de l'emplacement de déploiement du coussin d'air ;

**EP 0 757 635 B1**

- (d) l'état d'objet inanimé (IO) correspond au scénario d'un objet inanimé disposé dans le siège ; et  
(e) l'état de siège vide (E) correspond au scénario d'un siège vide.

- 5 6. Procédé selon la revendication 1,  
dans lequel  
la pluralité de détecteurs est choisie dans le groupe comprenant les détecteurs infrarouges, les détecteurs à ultrasons, les détecteurs de poids, les détecteurs à micro-ondes, les détecteurs à capacité, les détecteurs de lumière et les détecteurs laser.
- 10 7. Procédé selon la revendication 1,  
dans lequel  
les caractéristiques de signaux comprennent des indicateurs de (a) un mouvement, (b) une fréquence de mouvement, (c) des niveaux de mouvement, (d) une différence de niveaux de mouvement, (e) une distance, (f) une distance relative, (g) des niveaux thermiques, et (h) une différence de niveaux thermiques.
- 15 8. Procédé selon la revendication 1,  
dans lequel  
les caractéristiques fusionnées comprennent des indicateurs de (a) une température, (b) des différences de température, (c) une taille approximative d'objets, (d) une distance, (e) un mouvement, (f) une fréquence de mouvement, et (g) des niveaux de mouvement.
- 20 9. Procédé selon la revendication 1,  
dans lequel  
l'étape d'association (d) comprend les sous-étapes consistant à :
- 25 (i) utiliser des valeurs de confiance prédéterminées, les caractéristiques de signaux et les caractéristiques fusionnées pour produire (1) une matrice de confiance de décision comprenant les valeurs de confiance pour les caractéristiques de signaux des signaux de chaque détecteur, et (2) une matrice de confiance de décision comprenant les valeurs de confiance pour les caractéristiques fusionnées ;
- 30 (ii) utiliser les relations empiriques pour calculer un vecteur de confiance de décision correspondant à chacune des matrices de confiance de décision ;
- (iii) pondérer chaque vecteur de confiance de décision d'une manière prédéterminée pour produire des vecteurs pondérés ; et
- 35 (iv) combiner les vecteurs pondérés pour produire un vecteur résultant ayant des valeurs d'état à partir desquelles on sélectionne la valeur d'état caractéristique.
- 40 10. Procédé selon la revendication 1,  
dans lequel  
l'ensemble de critères de changement d'état comprend la considération de valeurs d'états caractéristiques précédentes et les valeurs d'état courantes précédents.
- 45 11. Procédé selon la revendication 1,  
dans lequel  
le sous-ensemble de l'ensemble prédéterminé de valeurs d'état, pour lequel le système de retenue passif doit être désactivé, comprend les valeurs d'état correspondant à un état de siège d'enfant tourné vers l'arrière, un état de siège vide, un état d'objet inanimé, et un état hors de position.
- 50 12. Procédé selon la revendication 1,  
dans lequel  
le système de retenue passif comprend un système de déploiement de coussin d'air à boîtier unique.
- 55 13. Procédé selon la revendication 1,  
dans lequel  
le système de retenue passif comprend un système de déploiement de coussin d'air à boîtiers multiples capable de pressuriser partiellement un coussin d'air à divers degrés de pression.
14. Procédé selon la revendication 9,  
comportant en outre

**EP 0 757 635 B1**

la modification des valeurs de confiance au cours du temps pour s'adapter à des changements de conditions d'environnement du véhicule.

- 5 15. Procédé selon la revendication 1,  
dans lequel  
l'étape de détection comprend l'utilisation d'un détecteur à ultrasons pour émettre des impulsions ultrasoniques et recevoir des signaux de retour ultrasoniques.
- 10 16. Procédé selon la revendication 15,  
comprenant en outre  
la variation des temps de transmission entre les impulsions ultrasoniques.
- 15 17. Procédé selon la revendication 6,  
dans lequel  
l'étape de détection comprend l'utilisation de deux détecteurs infrarouges placés tout près l'un de l'autre et séparés par un déflecteur.
- 20 18. Procédé selon la revendication 17,  
dans lequel  
l'étape de détection comprend en outre l'utilisation d'une lentille de Fresnel à éléments multiples pour focaliser un détecteur sur le dossier du siège de passager et pour focaliser l'autre détecteur sur la surface de siège du siège de passager.
- 25 19. Procédé selon la revendication 7,  
dans lequel  
les indicateurs de mouvement comprennent des indicateurs de mouvement latéral et de mouvement longitudinal.
- 30 20. Procédé selon la revendication 1,  
dans lequel  
la pluralité de détecteurs comprend :
- 35 (a) un premier détecteur à infrarouges générant un premier signal de données brutes ;  
(b) un second détecteur à infrarouges générant un second signal de données brutes ; et  
(c) un détecteur à ultrasons générant un troisième signal de données brutes ;
- et dans lequel l'étape d'évaluation (b) comprend :
- 40 i) le traitement des premier et second signaux de données brutes pour développer un premier ensemble de signaux représentant un premier groupe de caractéristiques de signaux et définissant un signal de vecteur caractéristique à infrarouges ;  
ii) le traitement du troisième signal de données brutes pour développer un second ensemble de signaux représentant un second groupe de caractéristiques de signaux et définissant un signal de vecteur caractéristique à ultrasons ;  
45 iii) la sélection d'un sous-ensemble du premier groupe de caractéristiques de signaux pour développer un troisième groupe de caractéristiques de signaux définissant un signal de sous-ensemble de vecteur caractéristique à infrarouges ; et  
iv) la sélection d'un sous-ensemble du second groupe de caractéristiques de signaux pour développer un quatrième groupe de caractéristiques de signaux définissant un signal de sous-ensemble de vecteur caractéristique à ultrasons.
- 50 21. Procédé selon la revendication 20,  
dans lequel  
l'étape de combinaison comprend le traitement du signal de sous-ensemble de vecteur caractéristique à infrarouges et du signal de sous-ensemble de vecteur caractéristique à ultrasons, pour développer un signal de vecteur caractéristique fusionné.
- 55 22. Procédé selon la revendication 21,  
dans lequel

**EP 0 757 635 B1**

le traitement du signal de sous-ensemble de vecteur caractéristique à infrarouges et du signal de sous-ensemble de vecteur caractéristique à ultrasons, comprend :

- 5 (a) la corrélation d'un premier sous-ensemble du troisième groupe de caractéristiques de signaux, avec un premier sous-ensemble du quatrième groupe de caractéristiques de signaux, pour développer un signal de composantes de fréquences spatiales à infrarouges ;
- (b) le traitement d'un second sous-ensemble du troisième groupe de caractéristiques de signaux, avec un second sous-ensemble du quatrième groupe de caractéristiques de signaux, pour développer un premier signal de température de surface absolue à infrarouges, un second signal de température de surface absolue à infrarouges, et un signal de température de surface absolue différentiel à infrarouges ;
- 10 (c) le traitement d'un troisième sous-ensemble du troisième groupe de caractéristiques de signaux, avec un troisième sous-ensemble du quatrième groupe de caractéristiques de signaux, pour développer un signal de corrélation de niveau de mouvement à infrarouges/ultrasons, un signal de corrélation temporel de niveau de mouvement à infrarouges/ultrasons, et un signal de corrélation de fréquence de mouvement à infrarouges/ultrasons ; et
- 15 (d) la combinaison du signal de composantes de fréquences spatiales à infrarouges, du premier signal de température de surface absolue à infrarouges, du second signal de température de surface absolue à infrarouges, du signal de température de surface absolue, différentiel, à infrarouges, du signal de corrélation de niveau de mouvement à infrarouges/ultrasons, du signal de corrélation temporel de niveau de mouvement à infrarouges/ultrasons, et du signal de corrélation de fréquence de mouvement à infrarouges/ultrasons, pour former le signal de vecteur caractéristique fusionné.
- 20

23. Procédé selon la revendication 22, dans lequel

- 25 les signaux représentant le premier groupe de caractéristiques de signaux comprennent un premier signal de fréquence de mouvement latéral à infrarouges, un premier signal temporel thermique à infrarouges, un premier signal de niveau thermique à infrarouges, un premier signal temporel de mouvement latéral à infrarouges, un premier signal de niveau de mouvement latéral à infrarouges, un signal de niveau de mouvement longitudinal à infrarouges, un signal de niveau de mouvement différentiel à infrarouges, un signal temporel de mouvement différentiel à infrarouges, un signal de fréquence de mouvement différentiel à infrarouges, un second signal de fréquence de mouvement latéral à infrarouges, un second signal temporel thermique à infrarouges, un second signal de niveau thermique à infrarouges, un second signal temporel de mouvement latéral à infrarouges, et un second signal de niveau de mouvement latéral à infrarouges.
- 30

35 24. Procédé selon la revendication 23, dans lequel

- les signaux représentant le second groupe de caractéristiques de signaux comprennent un signal de distance absolue, un premier signal de taux de changement de niveau de retour, un premier signal de niveau de retour, un premier signal de retour de distance absolue, un signal de mouvement de distance, un signal de taux de changement de mouvement de distance, un signal temporel de mouvement de distance, un signal de fréquence de mouvement de distance, un signal de taux de changement de niveau de distance relatif, un signal de niveau de distance relatif, un signal de valeur de distance relatif, un signal de triangulation à chemins multiples, et un signal de température d'air.
- 40

45 25. Procédé selon la revendication 24, dans lequel

- les signaux représentant le troisième groupe de caractéristiques de signaux comprennent le premier signal de fréquence de mouvement latéral à infrarouges, le premier signal de niveau thermique à infrarouges, le premier signal temporel de mouvement latéral à infrarouges, le signal de fréquence de mouvement différentiel à infrarouges, le second signal de fréquence de mouvement latéral à infrarouges, le second signal de niveau thermique à infrarouges, le second signal temporel de mouvement latéral à infrarouges, et le signal de fréquence de mouvement différentiel à infrarouges.
- 50

26. Procédé selon la revendication 25, dans lequel

- 55 les signaux représentant le quatrième groupe de caractéristiques de signaux comprennent le signal de distance absolue, le premier signal de retour de distance absolue, le signal temporel de mouvement de distance, le signal de fréquence de mouvement de distance, le signal de valeur de distance relative, et le signal de triangulation à

**EP 0 757 635 B1**

chemins multiples.

27. Procédé selon la revendication 26,  
dans lequel  
5 les signaux représentant le premier sous-ensemble du troisième groupe comprennent le premier signal de fréquence de mouvement latéral à infrarouges, le second signal de fréquence de mouvement latéral à infrarouges, et le signal de fréquences de mouvement différentiel à infrarouges.
28. Procédé selon la revendication 27,  
10 dans lequel  
les signaux représentant le second sous-ensemble du troisième groupe comprennent le premier signal de niveau thermique à infrarouges, et le second signal de niveau thermique à infrarouges.
29. Procédé selon la revendication 28,  
15 dans lequel  
les signaux représentant le troisième sous-ensemble du troisième groupe comprennent le premier signal de fréquence de mouvement latéral à infrarouges, le second signal de fréquence de mouvement latéral à infrarouges, le premier signal temporel de mouvement latéral à infrarouges, et le second signal temporel de mouvement latéral à infrarouges.
- 20 30. Procédé selon la revendication 29,  
dans lequel  
les signaux représentant le premier sous-ensemble du quatrième groupe comprennent le signal de distance absolue, le premier signal de retour de distance absolue, le signal de valeur de distance relative, et le signal de triangulation à chemins multiples.
- 25 31. Procédé selon la revendication 30,  
dans lequel  
les signaux représentant le second sous-ensemble du quatrième groupe comprennent le signal de distance absolue et le premier signal de retour de distance absolue.
- 30 32. Procédé selon la revendication 31,  
dans lequel  
les signaux représentant le troisième sous-ensemble du quatrième groupe comprennent le signal temporel de mouvement de distance et le signal de fréquence de mouvement de distance.
- 35 33. Appareil déterminant s'il faut ou non commander le système de retenue passif (4) d'un passager d'un véhicule, en fonction d'une valeur d'état courante déterminée en comparant des caractéristiques de signaux mesurées, à un ensemble prédéterminé de valeurs de confiance et de relations empiriques obtenues en utilisant divers scénarios d'occupation connus (E, O, IO, RFCS, OOP) et un ensemble de critères de changement d'état, comprenant les caractéristiques suivantes :
- 40 (a) des moyens de détection (24, 26) des caractéristiques d'occupation d'un siège de passager (12) à l'intérieur du véhicule, en utilisant un certain nombre de fonctionnalités associées au siège de passager (12) et un ensemble de signaux électriques correspondants (70, 71, 75);
- 45 (b) des moyens d'évaluation (74, 77) des signaux électriques pour déterminer un certain nombre de caractéristiques de signaux incluses dans chacun des signaux ;
- (c) des moyens de combinaison (80) de certaines des caractéristiques de signaux pour obtenir un certain nombre de caractéristiques fusionnées ;
- 50 (d) des moyens d'association (82) des caractéristiques de signaux et des caractéristiques fusionnées, avec les valeurs de confiance et les relations empiriques, pour déterminer une valeur d'état caractéristique ;
- (e) des moyens d'identification (84) de la valeur d'état caractéristique comme valeur d'état courante correspondant à l'un des divers scénarios d'occupation connus, si l'on répond à l'ensemble de critères de changement d'état ; et
- 55 (f) des moyens de génération (84) d'un signal de commande d'état si la valeur d'état courante est l'une d'un ensemble prédéterminé de valeurs d'état pour lesquelles le système de retenue passif (4) doit être commandé, comprenant une désactivation possible du système de retenue.

**EP 0 757 635 B1**

34. Appareil selon la revendication 33,  
dans lequel  
le système de retenue passif de passager comprend un système de déploiement d'un coussin d'air ("air bag")  
comportant un coussin d'air positionné pour se déployer à proximité du siège de passager, ce système pouvant  
être désactivé ou commandé en gonflage en réponse au signal de commande d'état.
35. Appareil selon la revendication 34,  
dans lequel  
l'ensemble prédéterminé de valeurs d'état comprend des valeurs correspondant à un état de siège vide (E), un  
état de siège occupé (O), un état de siège d'enfant tourné vers l'arrière (RFCS), un état de passager hors de sa  
place (OOF), et un état d'objet inanimé (IO).
36. Appareil selon la revendication 34,  
dans lequel  
les scénarios d'occupation comprennent une personne assise (8) dans le siège de passager (12), une personne  
assise dans le siège de passager et tenant un sac à provisions (18), un enfant assis dans un siège d'enfant tourné  
vers l'arrière (11) disposé dans le siège, un enfant assis dans un siège d'enfant tourné vers l'avant (20) disposé  
dans le siège, une personne placée à proximité immédiate de l'emplacement de déploiement du coussin d'air, un  
enfant se tenant debout dans le siège à une certaine distance de l'emplacement de déploiement du coussin d'air,  
un enfant se tenant debout (15) à proximité immédiate de l'emplacement de déploiement du coussin d'air, un siège  
vide, un objet inanimé (17) disposé dans le siège, un animal domestique (13) disposé dans le siège, et un siège  
vide.
37. Appareil selon la revendication 35,  
dans lequel :
- (a) l'état de siège occupé (O) correspond aux scénarios d'une personne assise dans le siège, d'une personne  
assise dans le siège et tenant un sac à provisions (18), d'un enfant assis dans un siège d'enfant tourné vers  
l'avant (20) disposé dans le siège, d'un enfant se tenant debout dans le siège à une certaine distance de  
l'emplacement de déploiement du coussin d'air, et d'un animal domestique (13) disposé dans le siège ;
  - (b) l'état de siège d'enfant tourné vers l'arrière (RFCS) correspond au scénario d'un enfant assis dans le siège  
d'enfant tourné vers l'arrière et disposé dans le siège ;
  - (c) l'état de passager hors de sa place (OOF) correspond au scénario d'une personne placée à proximité  
immédiate de l'emplacement de déploiement du coussin d'air ;
  - (d) l'état d'objet inanimé (IO) correspond au scénario d'un objet inanimé disposé dans le siège ; et
  - (e) l'état de siège vide (E) correspond au scénario d'un siège vide.
38. Appareil selon la revendication 33,  
dans lequel  
la pluralité de détecteurs est choisie dans le groupe comprenant les détecteurs à infrarouges, les détecteurs à  
ultrasons, les détecteurs de poids, les détecteurs à micro-ondes, les détecteurs à capacité, les détecteurs de  
lumière et les détecteurs laser.
39. Appareil selon la revendication 33,  
dans lequel  
les caractéristiques de signaux comprennent des indicateurs de (a) un mouvement, (b) une fréquence de mouve-  
ment, (c) des niveaux de mouvement, (d) une différence de niveaux de mouvement, (e) une distance, (f) une  
distance relative, (g) des niveaux thermiques, et (h) une différence de niveaux thermiques.
40. Appareil selon la revendication 33,  
dans lequel  
les caractéristiques fusionnées comprennent des indicateurs de (a) une température, (b) des différences de tem-  
pérature, (c) une taille approximative d'objets, (d) une distance, (e) un mouvement, (f) une fréquence de mouve-  
ment, et (g) des niveaux de mouvement.
41. Appareil selon la revendication 33,  
dans lequel  
les moyens d'association comprennent :



**EP 0 757 635 B1**

- (i) des moyens utilisant des valeurs de confiance prédéterminées, les caractéristiques de signaux et les caractéristiques fusionnées, pour produire (1) une matrice de confiance de décision comprenant des valeurs de confiance pour les caractéristiques de signaux des signaux de chaque détecteur, et (2) une matrice de confiance de décision comportant des valeurs de confiance pour les caractéristiques fusionnées ;
- 5 (ii) des moyens utilisant les relations empiriques pour calculer un vecteur de confiance de décision correspondant à chacune des matrices de confiance de décision ;
- (iii) des moyens pondérant chaque vecteur de confiance de décision d'une manière prédéterminée pour donner des vecteurs pondérés ; et
- 10 (iv) des moyens combinant les vecteurs pondérés pour produire un vecteur résultant ayant des valeurs d'état à partir desquelles la valeur d'état caractéristique est sélectionnée.

42. Appareil selon la revendication 33,  
dans lequel  
l'ensemble de critères de changement d'état comprend la considération de valeurs d'état caractéristiques précédentes et de valeurs d'état courantes précédentes.

15

43. Appareil selon la revendication 33,  
dans lequel  
le sous-ensemble de l'ensemble prédéterminé de valeurs d'état pour lequel le système de retenue passif doit être désactivé, comprend des valeurs d'état correspondant à un état de siège d'enfant tourné vers l'arrière, un état de siège vide, un état d'objet inanimé et un état hors de position.

20

44. Appareil selon la revendication 33,  
dans lequel  
le système de retenue passif comprend un système de déploiement de coussin d'air à un seul boîtier.

25

45. Appareil selon la revendication 33,  
dans lequel  
le système de retenue passif comprend un système de déploiement de coussin d'air à boîtiers multiples capable de pressuriser partiellement un coussin d'air à divers degrés de pression.

30

46. Appareil selon la revendication 33,  
comprenant en outre  
des moyens de modification des niveaux de confiance au cours du temps de manière à s'adapter à des variations de conditions d'environnement du véhicule.

35

47. Appareil selon la revendication 33,  
dans lequel  
les moyens de détection comprennent un détecteur à ultrasons pour émettre des impulsions ultrasoniques et pour recevoir des signaux de retour ultrasoniques.

40

48. Appareil selon la revendication 47,  
comprenant en outre  
des moyens variables pour faire varier le temps de transmission entre les impulsions ultrasoniques.

45

49. Appareil selon la revendication 38,  
dans lequel  
les moyens de détection comprennent deux détecteurs à infrarouges placés tout près l'un de l'autre et séparés par un déflecteur.

50

50. Appareil selon la revendication 49,  
dans lequel  
les moyens de détection comprennent en outre une lentille de Fresnel à éléments multiples pour focaliser un détecteur sur le dossier du siège de passager et pour focaliser l'autre détecteur sur la surface de siège du siège de passager.

55

51. Appareil selon la revendication 39,  
dans lequel

**EP 0 757 635 B1**

les indicateurs de mouvement comprennent des indicateurs de mouvement latéral et des indicateurs de mouvement longitudinal.

**52. Appareil selon la revendication 33,**

5 dans lequel  
la pluralité de détecteurs d'éléments (a) comprend :

- 10 (i) un premier détecteur à infrarouges générant un premier signal de données brutes ;  
(ii) un second détecteur à infrarouges générant un second signal de données brutes ; et  
(iii) au moins un détecteur à ultrasons générant au moins un troisième signal de données brutes ;

et dans lequel  
les moyens d'évaluation (b) comprennent :

- 15 (i) des moyens de traitement des premier et second signaux de données brutes, et de développement d'un premier ensemble de signaux représentant un premier groupe de caractéristiques de signaux et définissant un signal de vecteur caractéristique à infrarouges ;  
(ii) des moyens de traitement de(s) troisième(s) signal(aux) de données brutes et de développement d'un second ensemble de signaux représentant un second groupe de caractéristiques de signaux et définissant  
20 au moins un signal de vecteur caractéristique à ultrasons ;  
(iii) des moyens de sélection d'un sous-ensemble du premier groupe de signaux pour développer un troisième groupe de caractéristiques de signaux définissant un signal de sous-ensemble de vecteur caractéristique à infrarouges ; et  
(iv) des moyens de sélection d'un sous-ensemble du second groupe de caractéristiques de signaux pour  
25 développer un quatrième groupe de caractéristiques de signaux définissant au moins un signal de sous-ensemble de vecteurs caractéristiques à ultrasons.

**53. Appareil selon la revendication 52,**

30 dans lequel  
les moyens de combinaison comprennent des moyens de traitement pour traiter le signal de sous-ensemble de vecteurs caractéristiques à infrarouges et les signaux de sous-ensemble de vecteurs caractéristiques à ultrasons, de manière à développer un signal de vecteur caractéristique fusionné.

**54. Appareil selon la revendication 53,**

35 dans lequel  
les moyens de traitement pour traiter le signal de sous-ensemble de vecteurs caractéristiques à infrarouges et le (s) signal(ux) de sous-ensemble de vecteurs caractéristiques à ultrasons, comprennent :

- 40 (a) des moyens de corrélation d'un premier sous-ensemble du troisième groupe de caractéristiques de signaux, avec un premier sous-ensemble du quatrième groupe de caractéristiques de signaux, et de développement d'un signal de composantes de fréquences spatiales à infrarouges ;  
(b) des moyens de traitement d'un second sous-ensemble du troisième groupe de caractéristiques de signaux, avec un second sous-ensemble du quatrième groupe de caractéristiques de signaux, et de développement d'un premier signal de température de surface absolue à infrarouges, d'un second signal de température de surface absolue, différentiel, à infrarouges ;  
45 (c) des moyens de traitement d'un troisième sous-ensemble du troisième groupe de caractéristiques de signaux, avec un troisième sous-ensemble du troisième groupe de caractéristiques de signaux, et de développement d'au moins un signal de corrélation de niveau de mouvement à infrarouges/ultrasons, d'un signal de corrélation temporel de niveau de mouvement à infrarouges/ultrasons, et d'un signal de corrélation de fréquence de mouvement à infrarouges/ultrasons ; et  
50 (d) la combinaison du signal de composantes de fréquences spatiales à infrarouges, du premier signal de température de surface absolue à infrarouges, du second signal de température de surface absolue à infrarouges, du signal de température de surface absolue, différentiel, à infrarouges, des signaux de corrélation de niveau de mouvement à infrarouges/ultrasons, des signaux de corrélation temporelle de niveau de mouvement à infrarouges/ultrasons, et des signaux de corrélation de fréquence de mouvement à infrarouges/ultrasons, de manière à former le signal de vecteur caractéristique fusionné.  
55

**55. Appareil selon la revendication 54,**

**EP 0 757 635 B1**

dans lequel

les signaux représentant le premier groupe de caractéristiques de signaux comprennent un premier signal de fréquence de mouvement latérale à infrarouges, un premier signal temporel thermique à infrarouges, un premier signal de niveau thermique à infrarouges, un premier signal temporel de mouvement latéral à infrarouges, un premier signal de niveau de mouvement latéral à infrarouges, un signal de niveau de mouvement longitudinal à infrarouges, un signal de niveau de mouvement différentiel à infrarouges, un signal temporel de mouvement différentiel à infrarouges, un signal de fréquence de mouvement différentiel à infrarouges, un second signal de fréquence de mouvement latéral à infrarouges, un second signal temporel thermique à infrarouges, un second signal de niveau thermique à infrarouges, un second signal temporel de mouvement latéral à infrarouges, et un second signal de niveau de mouvement latéral à infrarouges.

**56.** Appareil selon la revendication 55,  
dans lequel

les signaux représentant le second groupe des caractéristiques de signaux, comprennent l'un au moins de : un signal de distance absolue, un premier signal de taux de changement de niveau de retour, un premier signal de niveau de retour, un premier signal de retour de distance absolue, un signal de mouvement de distance, un signal de taux de changement de mouvement de distance, un signal temporel de mouvement de distance, un signal de fréquence de mouvement de distance, un signal de taux de changement de niveau de distance relatif, un signal de niveau de distance relatif, un signal de valeur de distance relatif, un signal de triangulation à chemins multiples, et un signal de température d'air.

**57.** Appareil selon la revendication 56,  
dans lequel

les signaux représentant le troisième groupe de caractéristiques de signaux, comprennent le premier signal de fréquence de mouvement latéral à infrarouges, le premier signal de niveau thermique à infrarouges, le premier signal temporel de mouvement latéral à infrarouges, le signal de fréquence de mouvement différentiel à infrarouges, le second signal de fréquence de mouvement latéral à infrarouges, le second signal de niveau thermique à infrarouges, le second signal temporel de mouvement latéral à infrarouges, et le signal de fréquence de mouvement différentiel à infrarouges.

**58.** Appareil selon la revendication 57,  
dans lequel

les signaux représentant le quatrième groupe de caractéristiques de signaux, comprennent l'un au moins de : le signal de distance absolue, le premier signal de retour de distance absolue, le signal temporel de mouvement de distance, le signal de fréquence de mouvement de distance, le signal de valeur de distance relative, et le signal de triangulation à chemins multiples.

**59.** Appareil selon la revendication 58,  
dans lequel

les signaux représentant le premier sous-ensemble du troisième groupe, comprennent le premier signal de fréquence de mouvement latéral à infrarouges, le second signal de fréquence de mouvement latéral à infrarouges, et le signal de fréquence de mouvement différentiel à infrarouges.

**60.** Appareil selon la revendication 59,  
dans lequel

les signaux représentant le second sous-ensemble du troisième groupe, comprennent le premier signal de niveau thermique à infrarouges et le second signal de niveau thermique à infrarouges.

**61.** Appareil selon la revendication 60,  
dans lequel

les signaux représentant le troisième sous-ensemble du troisième groupe comprennent le premier signal de fréquence de mouvement latéral à infrarouges, le second signal de fréquence de mouvement latéral à infrarouges, le premier signal temporel de mouvement latéral à infrarouges, et le second signal temporel de mouvement latéral à infrarouges.

**62.** Appareil selon la revendication 61,  
dans lequel

les signaux représentant le premier sous-ensemble du quatrième groupe comprennent l'un au moins de : le signal

**EP 0 757 635 B1**

de distance absolue, le premier signal de retour de distance absolue, le signal de valeur de distance relative, et le signal de triangulation à chemins multiples.

- 5       **63.** Appareil selon la revendication 62,  
dans lequel  
les signaux représentant le second sous-ensemble du quatrième groupe, comprennent l'un au moins de : le signal de distance absolue, et le premier signal de retour de distance absolue.
- 10       **64.** Appareil selon la revendication 63,  
dans lequel  
les signaux représentant le troisième sous-ensemble du quatrième groupe, comprennent l'un au moins de : le signal temporel de mouvement de distance, et le signal de fréquence de mouvement de distance.
- 15       **65.** Dispositif de circuit intégré à applications spécifiques pour le traitement de signaux d'entrée sensitifs reçus de détecteurs destinés à détecter les caractéristiques d'occupation d'un siège de passager particulier à l'intérieur d'un véhicule, et pour déterminer s'il faut ou non désactiver un système de retenue passif d'un passager de véhicule, en fonction d'une valeur d'état courante déterminée en comparant des caractéristiques de signaux mesurées, à un ensemble prédéterminé de valeurs de confiance et de relations empiriques obtenues en utilisant divers scénarios d'occupation connus et un ensemble de critères de changement d'état,  
20       comprenant, dans une ou plusieurs puces :  
  
          (a) des moyens d'évaluation des signaux d'entrée pour déterminer un certain nombre de caractéristiques de signaux ;  
          (b) des moyens de combinaison de certaines des caractéristiques de signaux pour obtenir un certain nombre  
25       de caractéristiques fusionnées ;  
          (c) des moyens d'association des caractéristiques de signaux et des caractéristiques fusionnées, avec les valeurs de confiance et les relations empiriques, de manière à déterminer une valeur d'état caractéristique ;  
          (d) des moyens d'identification de la valeur d'état caractéristique comme valeur d'état courante correspondant à l'un des divers scénarios d'occupation connus, si l'on répond à l'ensemble de critères de changement d'état ;  
30       et  
          (e) des moyens de génération d'un signal de désactivation si la valeur d'état courante est l'une d'un ensemble prédéterminé de valeurs d'état pour lesquelles le système de retenue passif doit être désactivé.

35





40

45





50

55




EP 0 757 635 B1

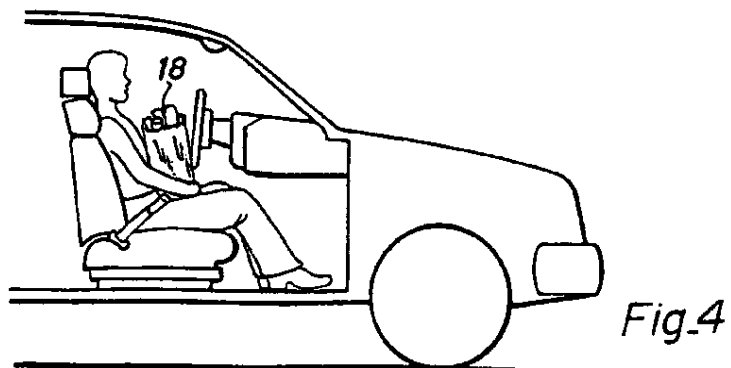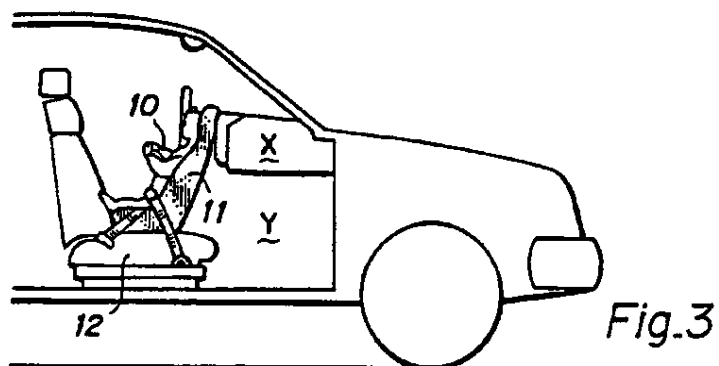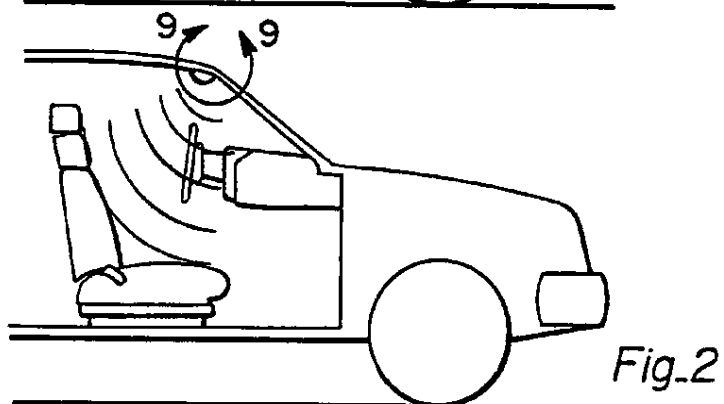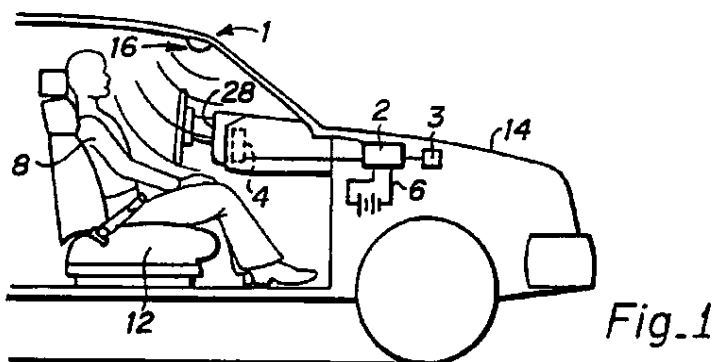




EP 0 757 635 B1

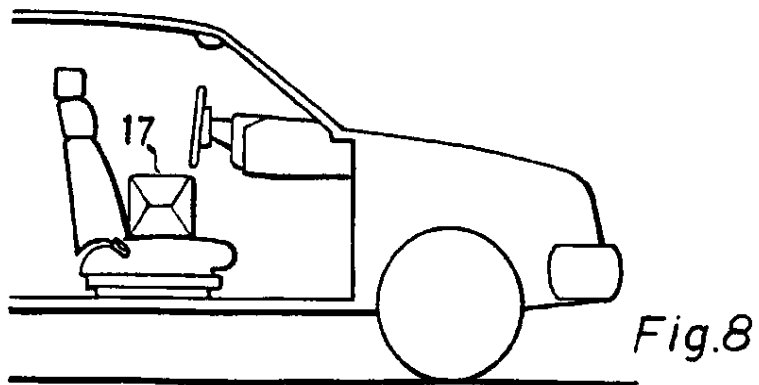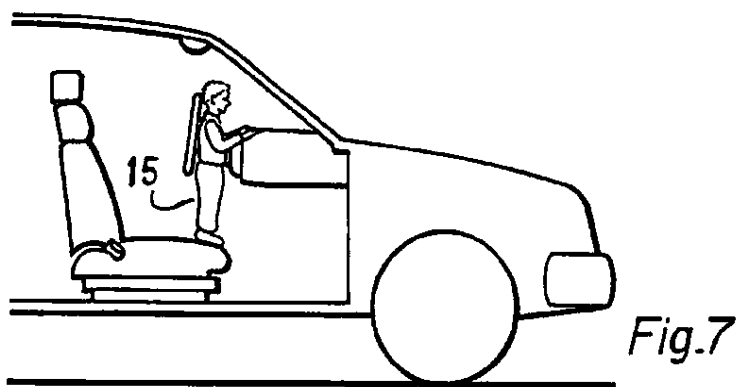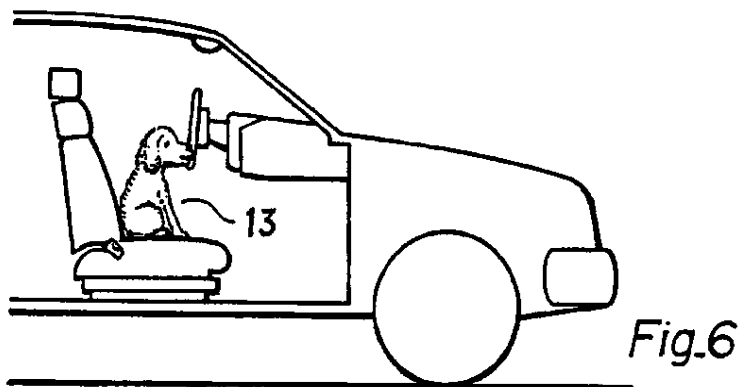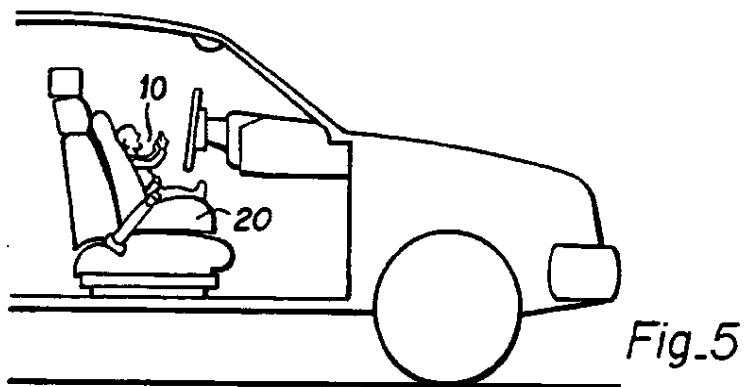

EP 0 757 635 B1

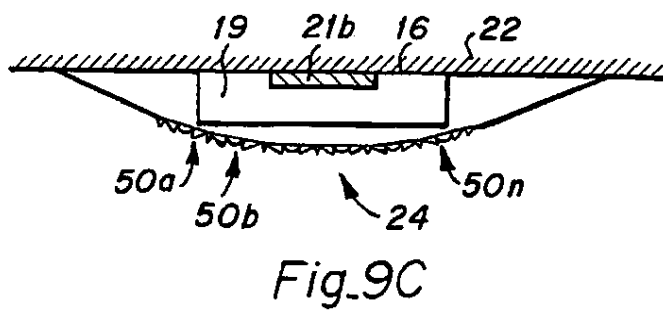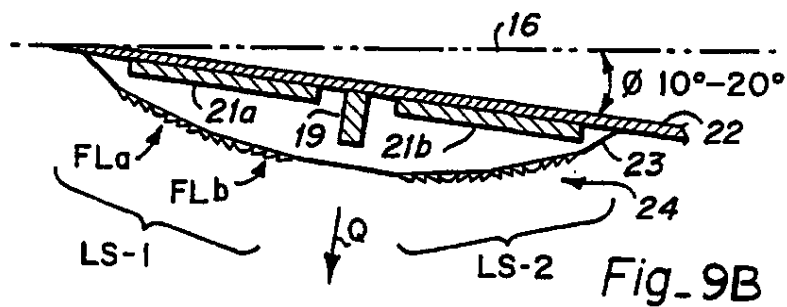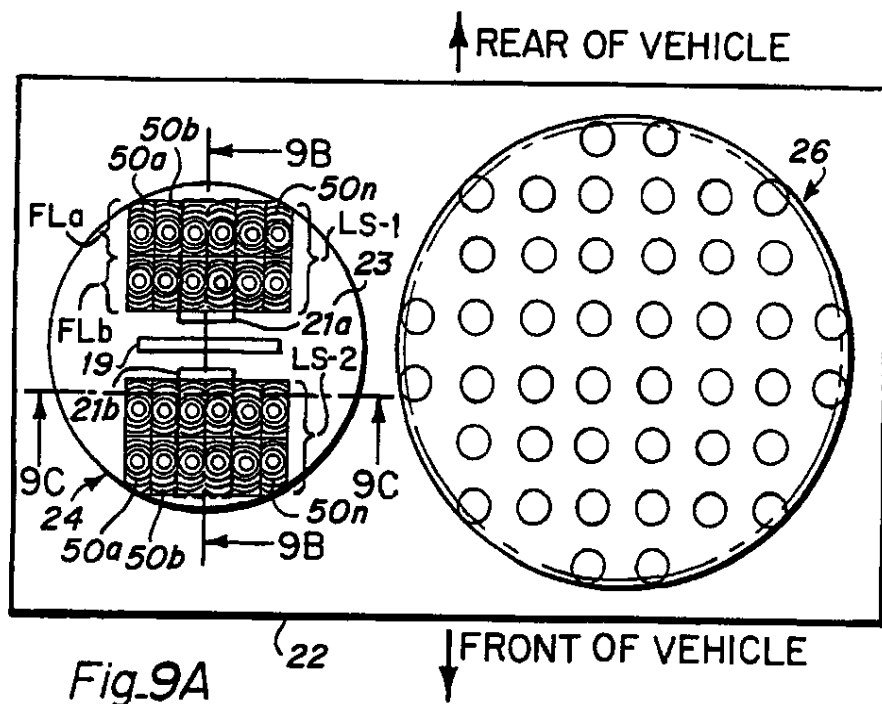

EP 0 757 635 B1

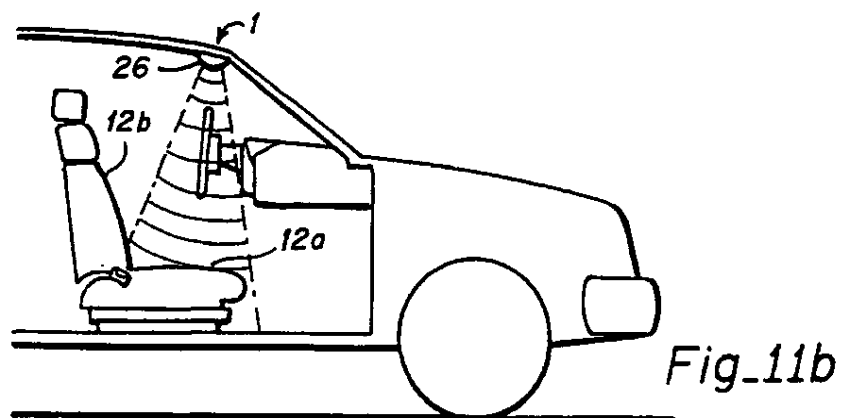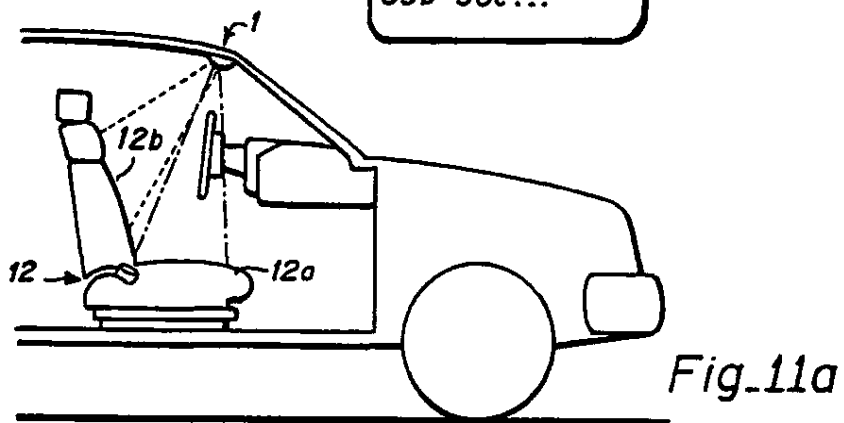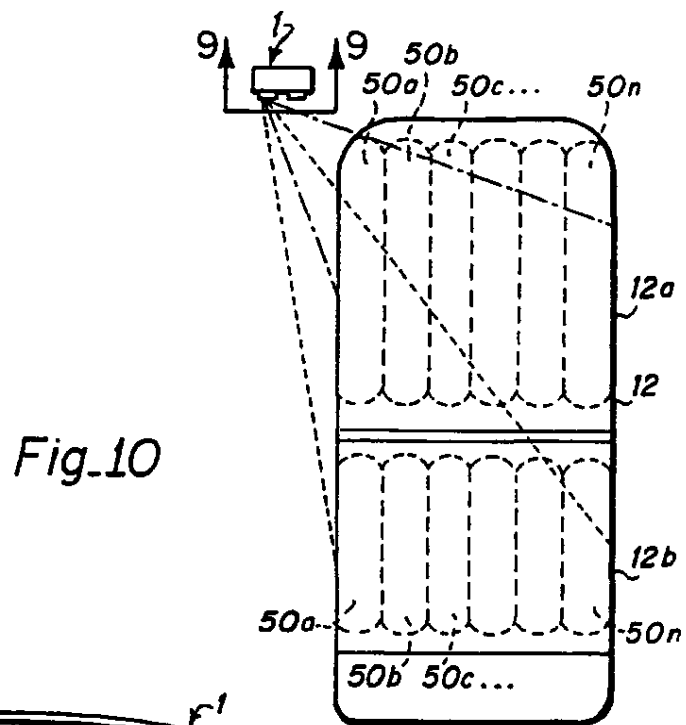



**EP 0 757 635 B1**


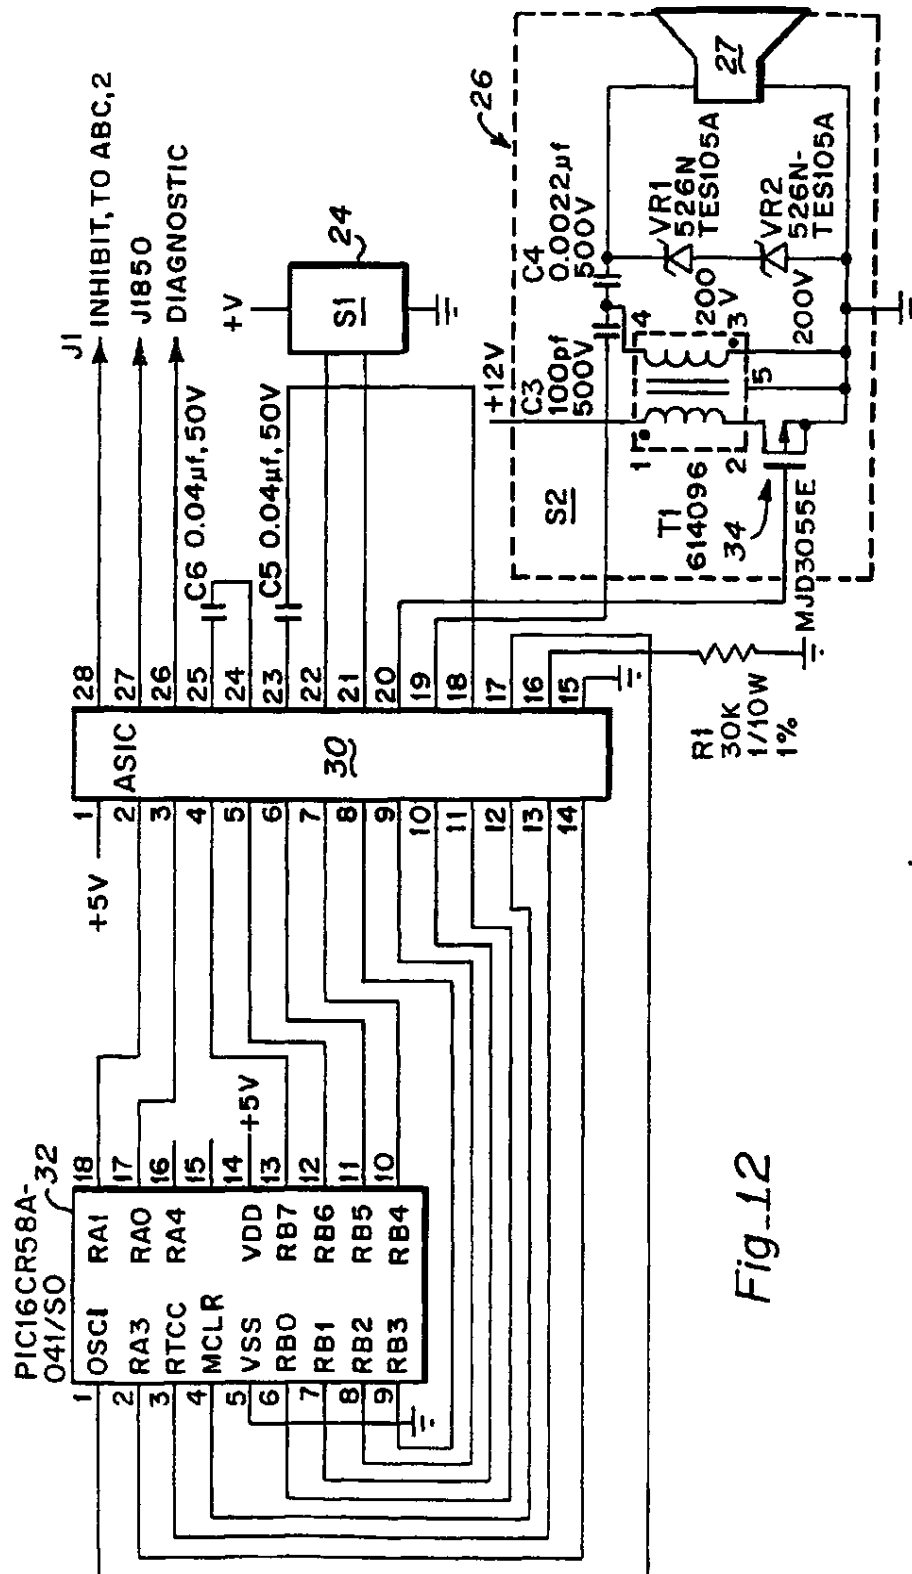


Fig-12

EP 0 757 635 B1

Fig. 13

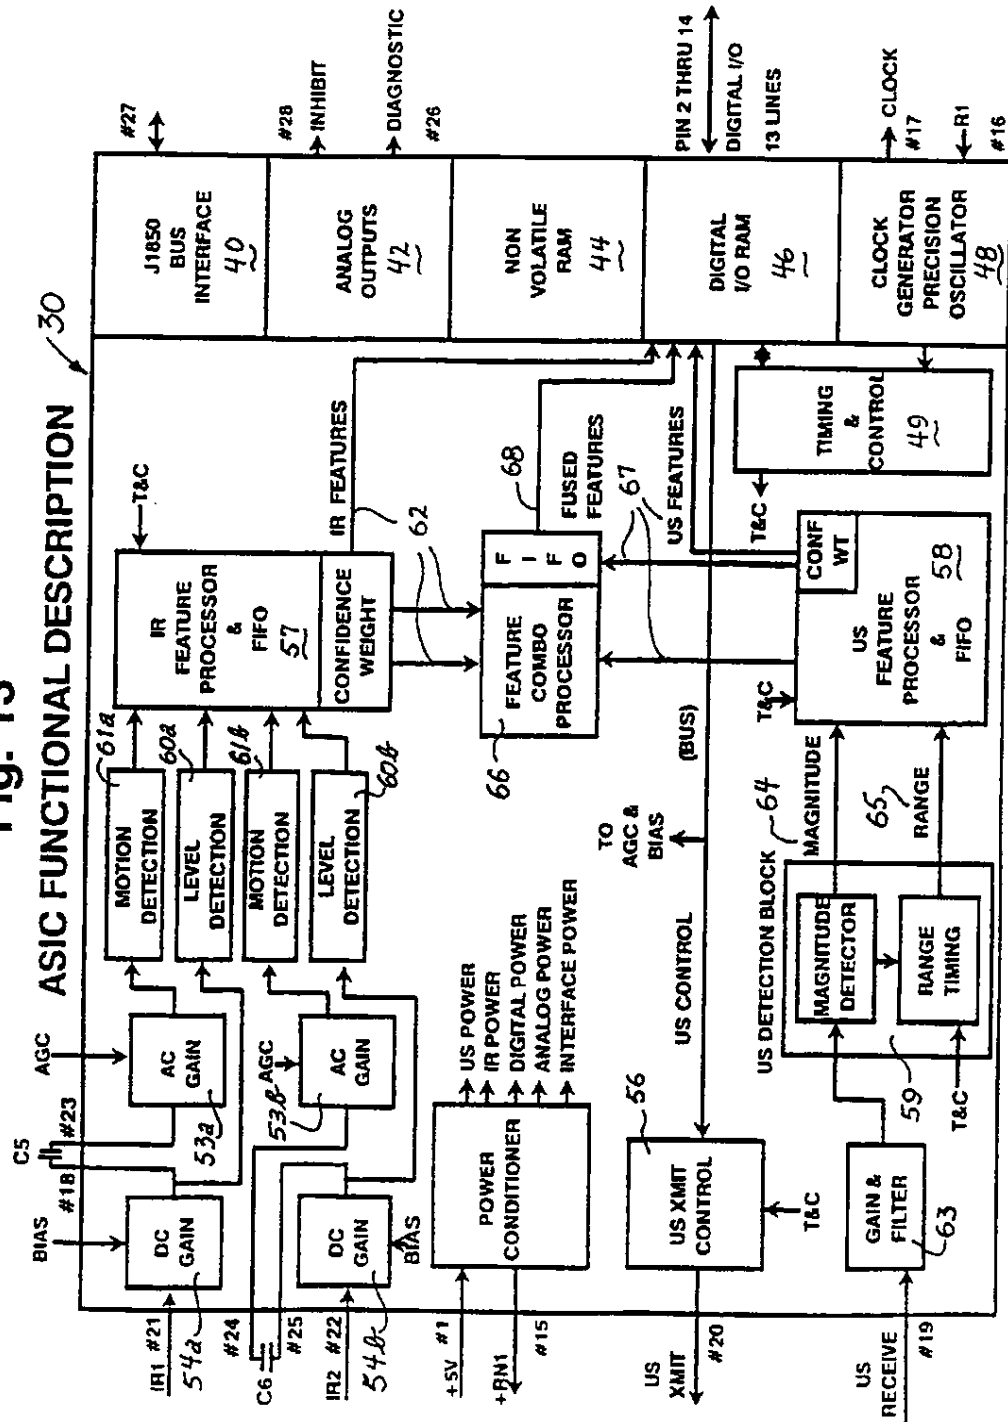

EP 0 757 635 B1

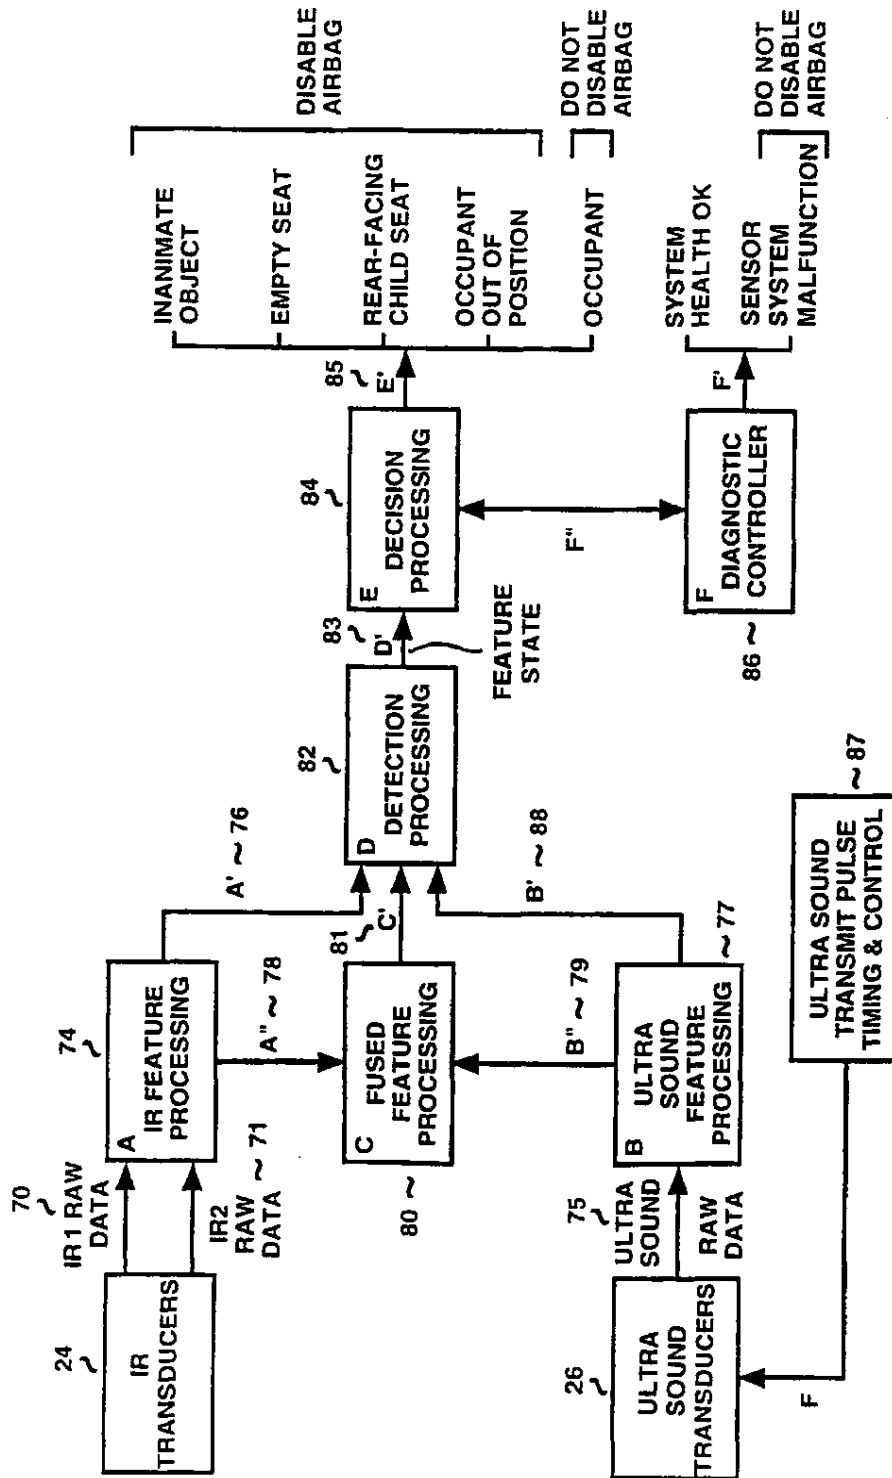


Fig. 14 SIGNAL PROCESSOR FUNCTIONAL BLOCK DIAGRAM

**EP 0 757 635 B1**


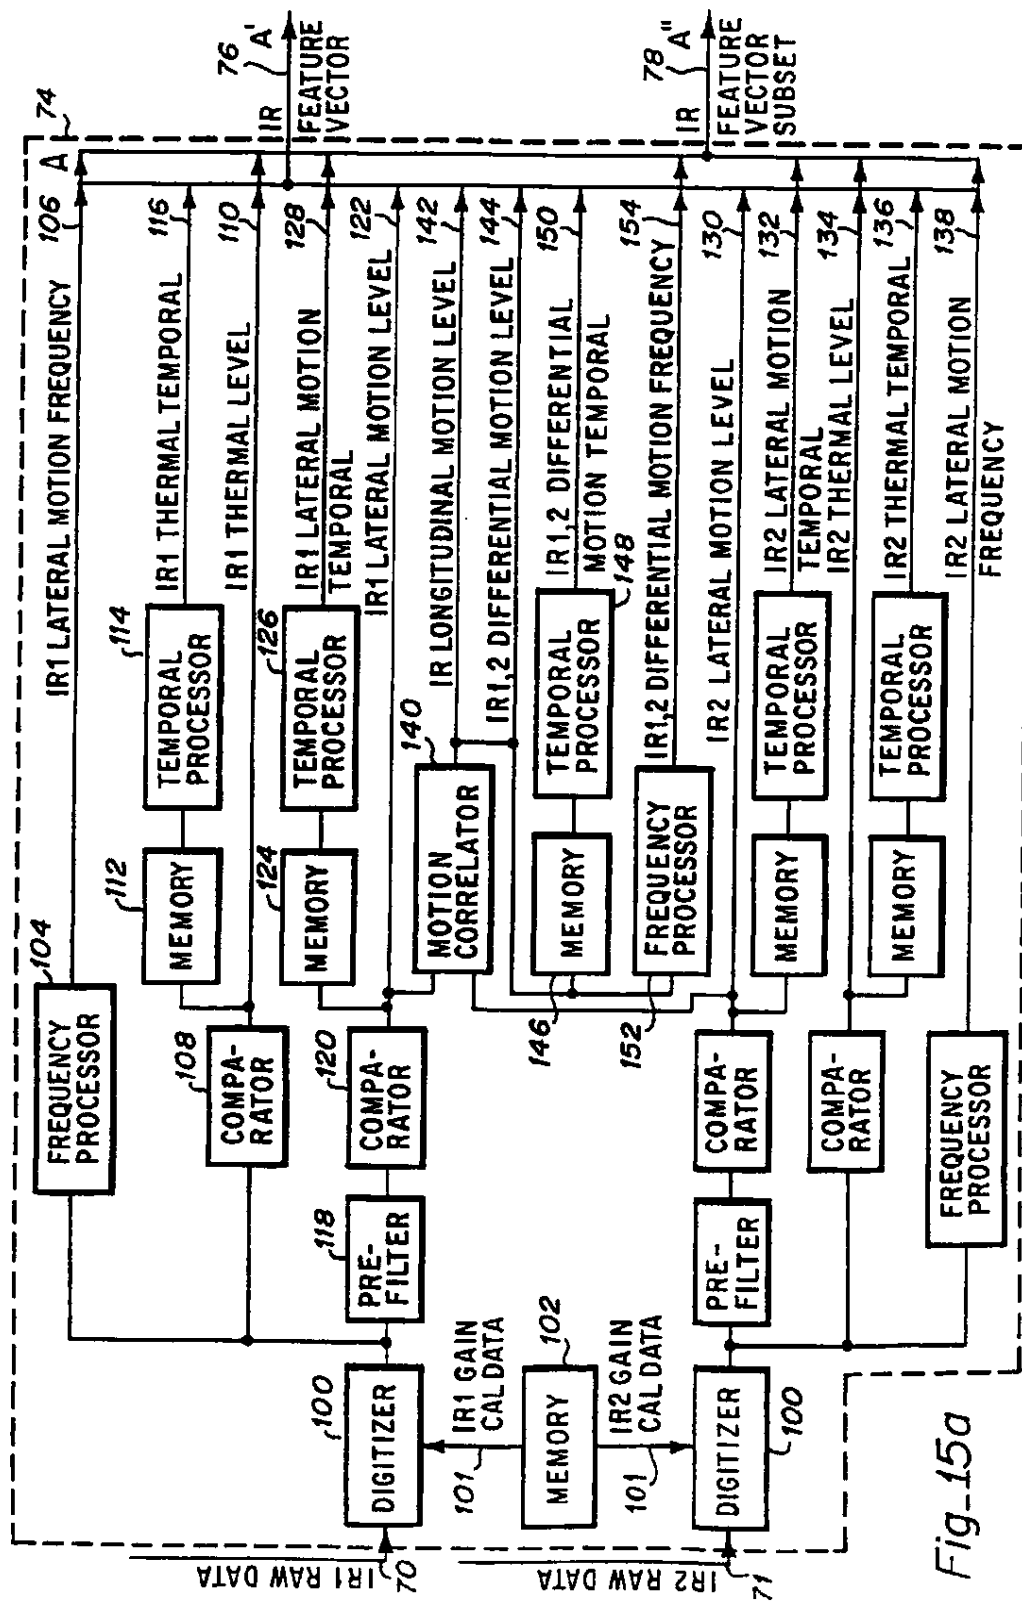


Fig-15a

EP 0 757 635 B1

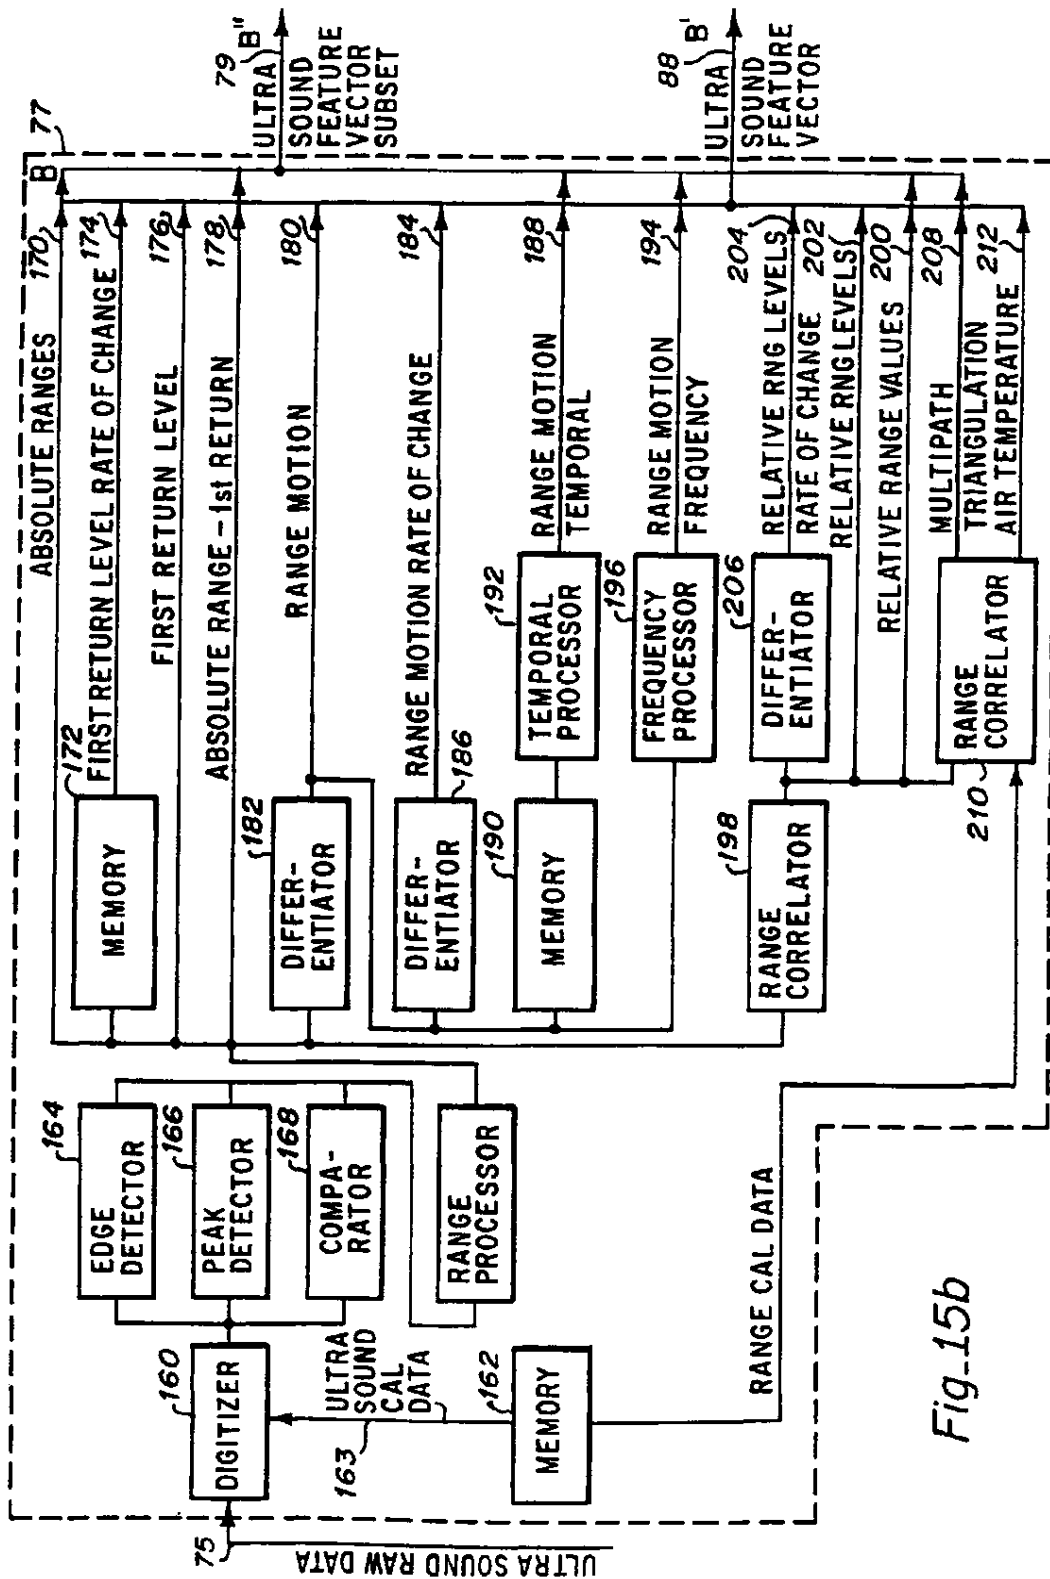

EP 0 757 635 B1

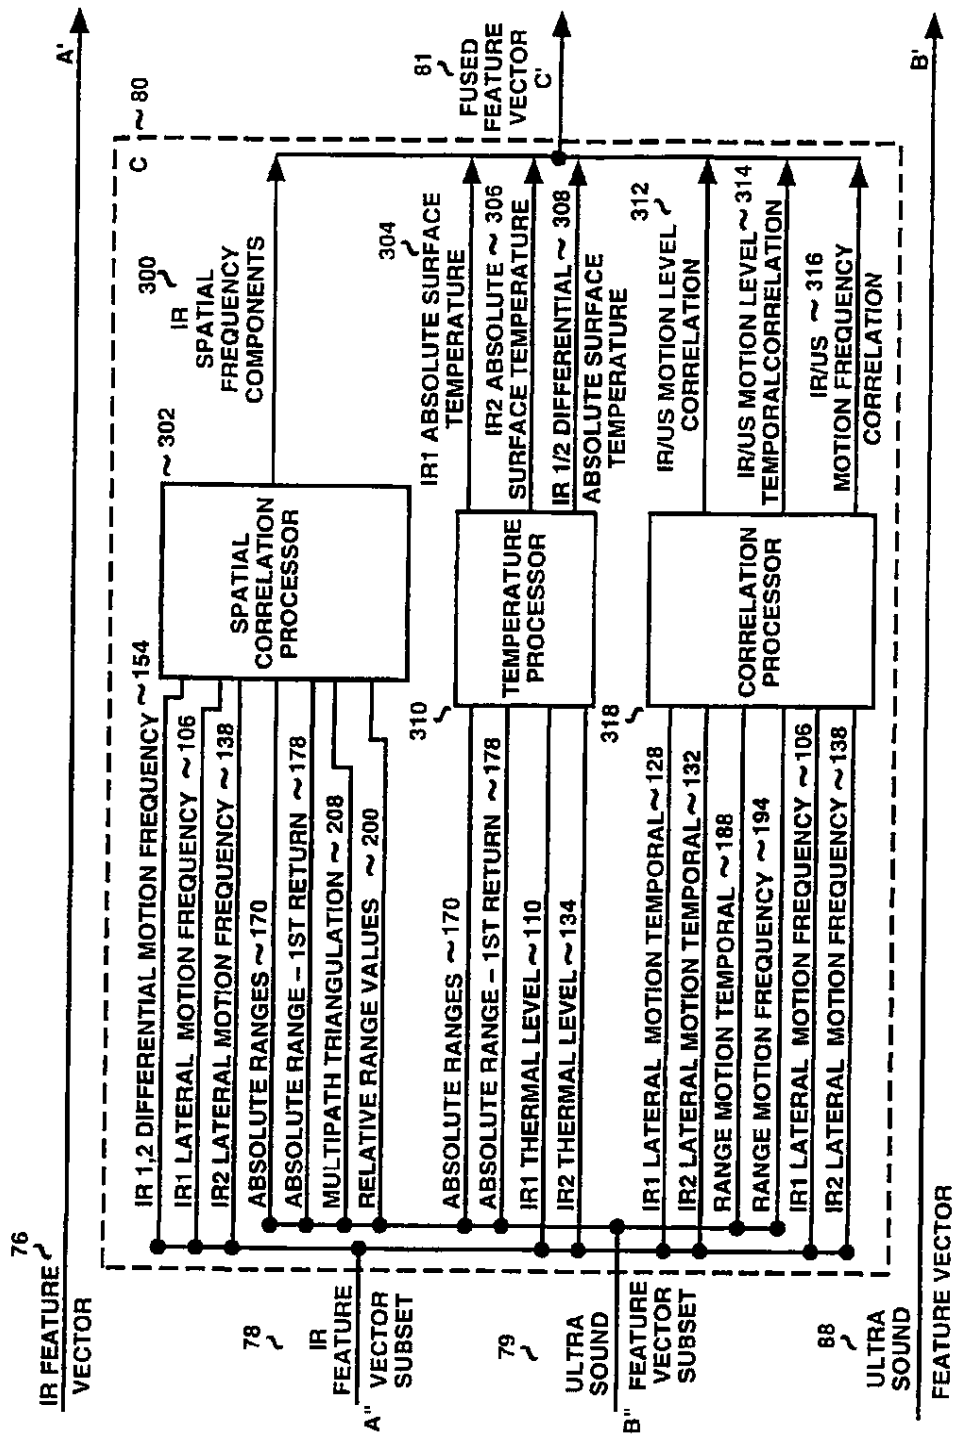


Figure 16

EP 0 757 635 B1

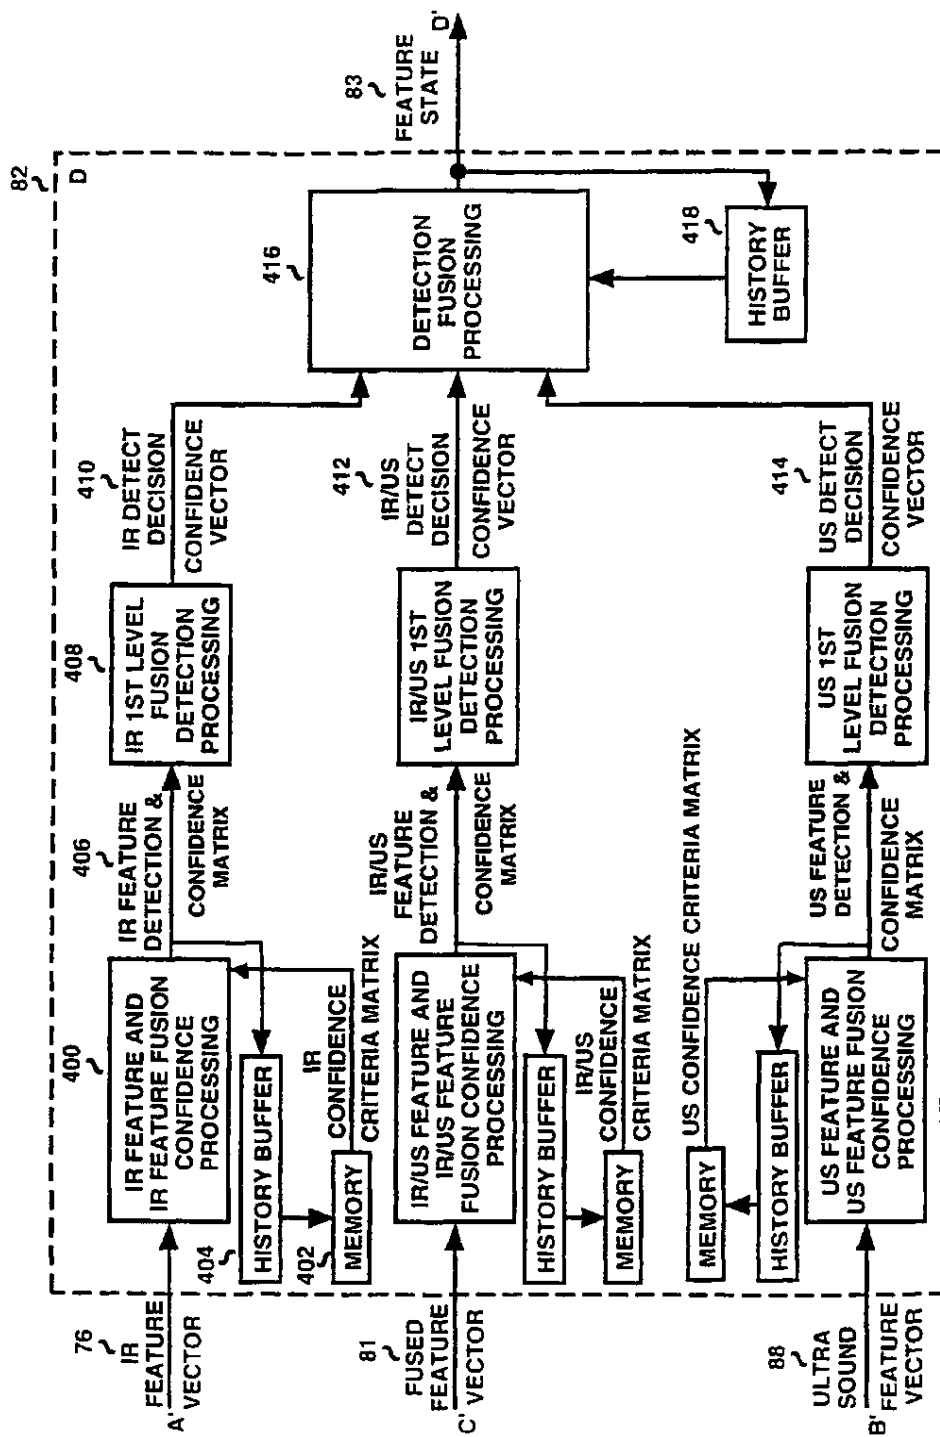


Figure 17

EP 0 757 635 B1



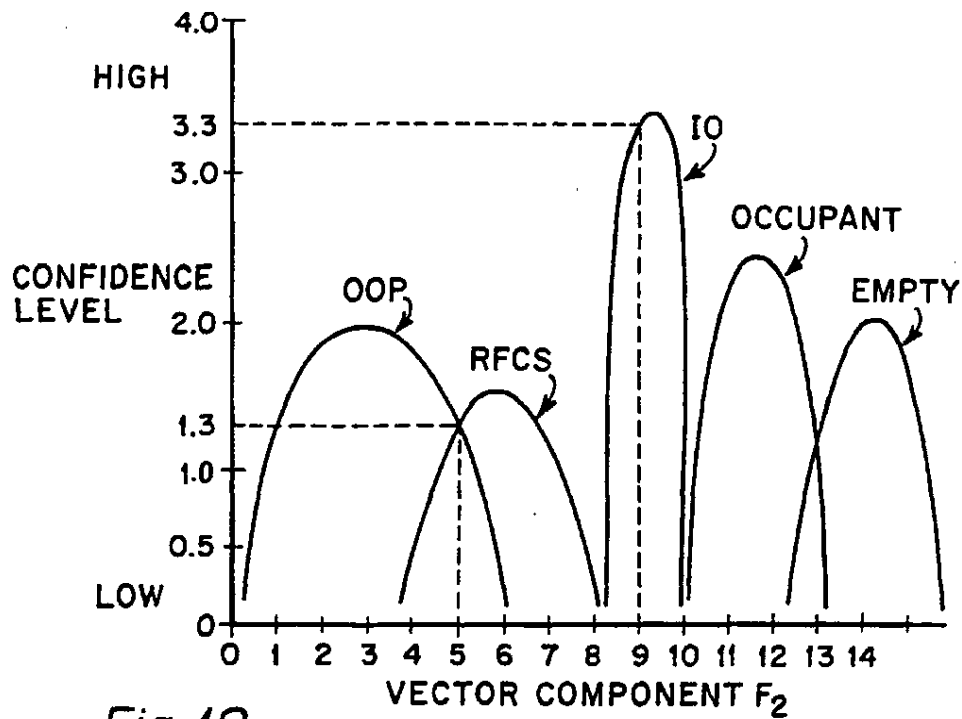


Fig. 18




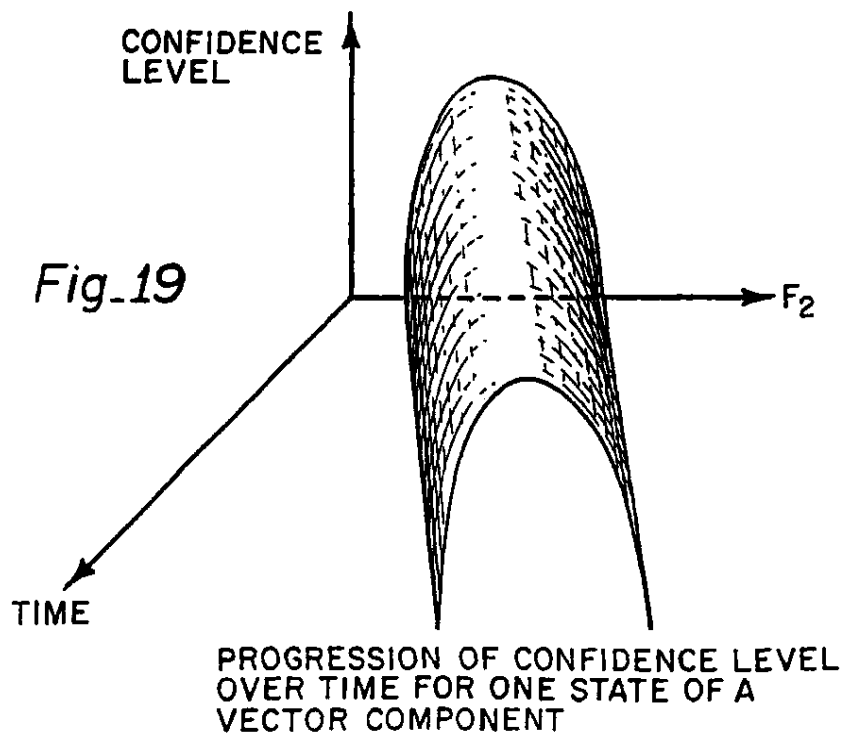

EP 0 757 635 B1

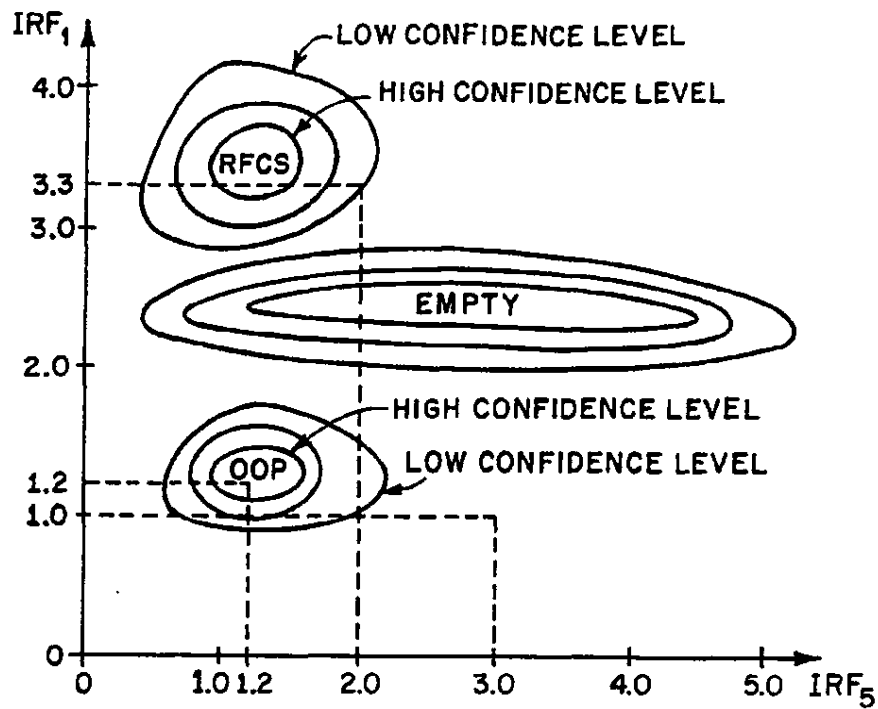

**Fig-20** CONFIDENCE LEVELS FOR FEATURE VECTOR COMPONENTS

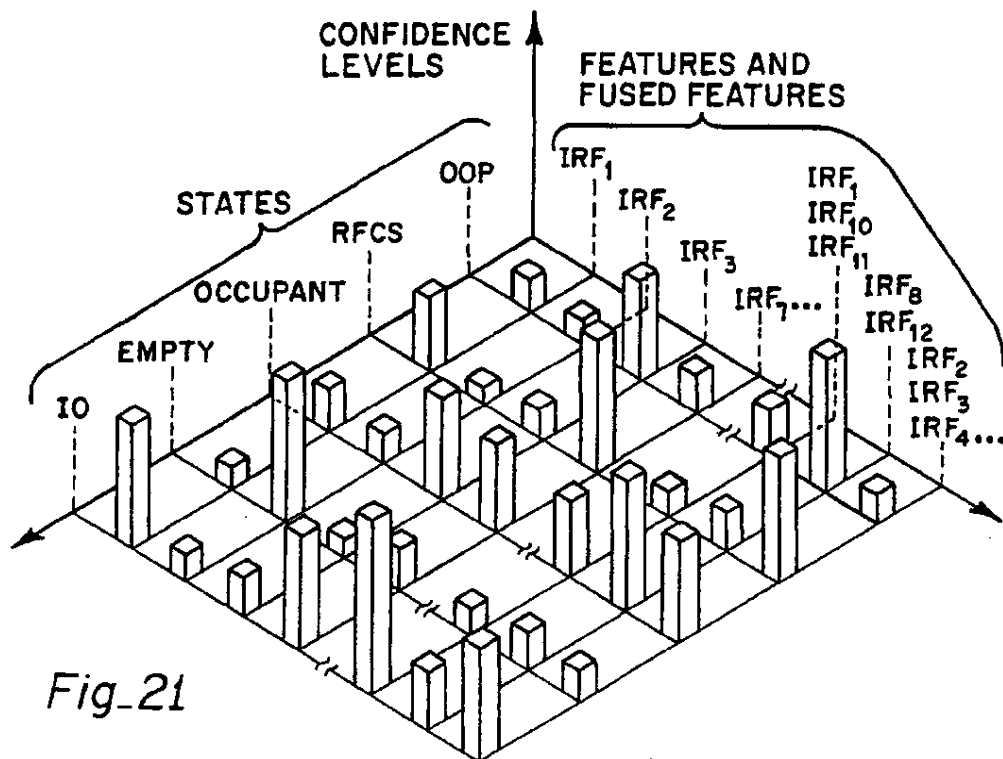

**Fig-21**

EP 0 757 635 B1

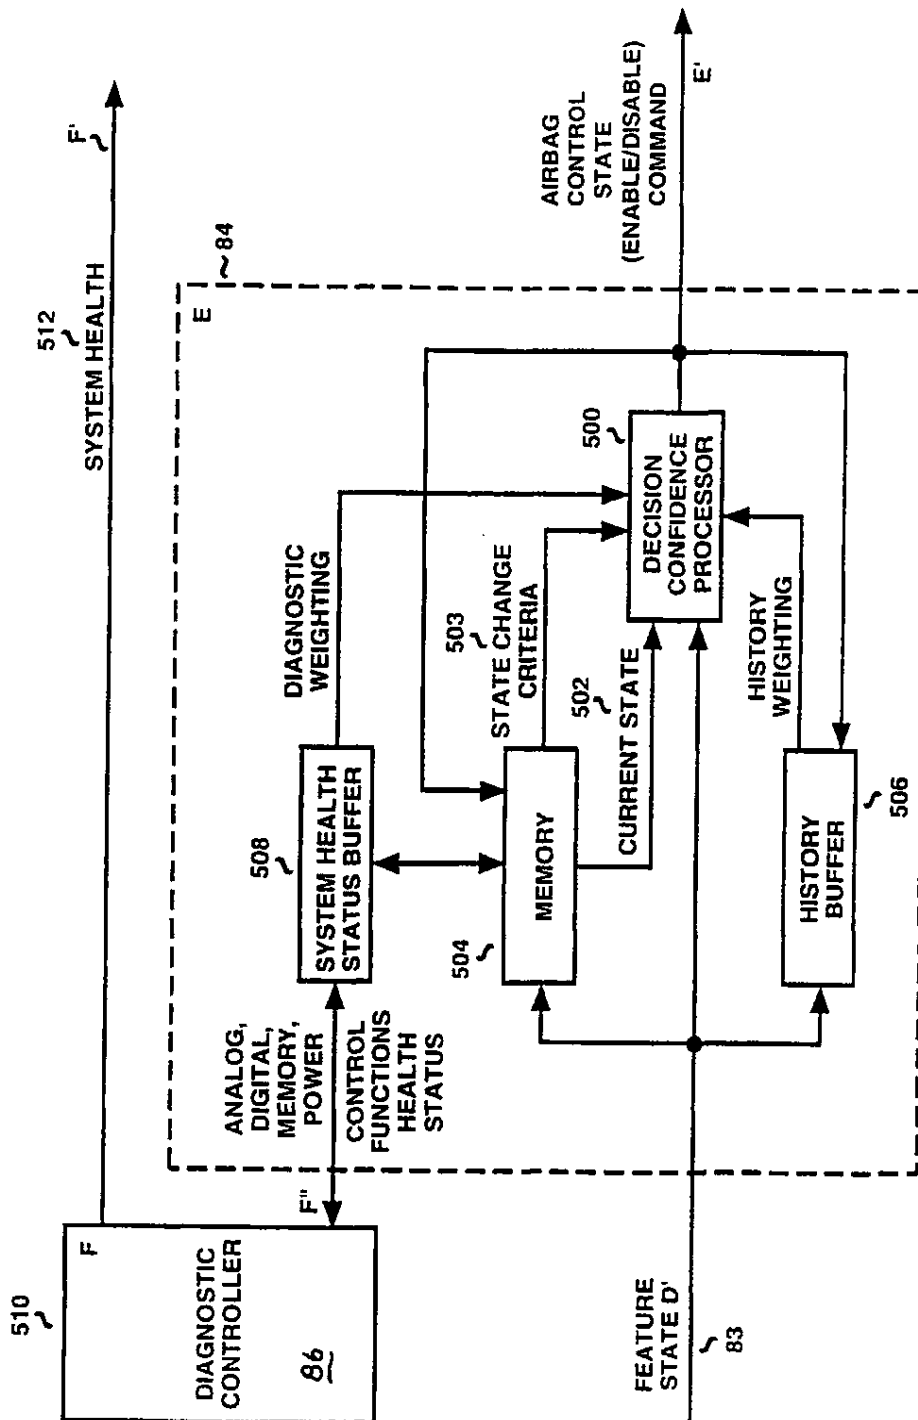


Figure 22

EP 0 757 635 B1




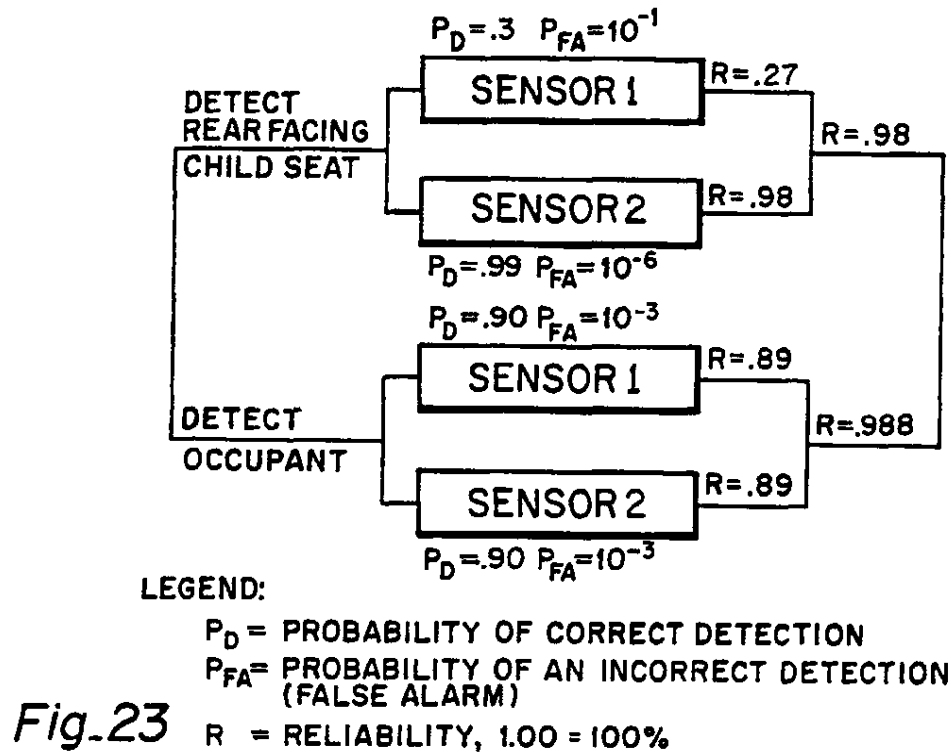


Fig. 23

AOS Detection Condition	Range Motion	Range Abs	R Motion	R Abs	Detection Pd
RFCS	0.9959	0.9959	0.3760	0.2747	0.999992
Occupant	0.9163	0.9519	0.9959	0.7026	0.999995
Empty Seat	0.9163	0.9519	0.9959	0.7924	0.999997
RFCS under 2 Thick Blankets	0.9591	0.9742	0.1892	0.2747	0.999379
AOS Diagnostic Condition	R Sensor	US Sensor	ASIC Circuits	Circuit Controller	Diagnostic Pd
Blockage	0.9742	0.9959	0.0000	0.0000	0.999894
Part Failure	0.9591	0.9591	0.9742	0.9742	0.999999
Out of Spec Part	0.9163	0.9163	0.9591	0.9519	0.999986

Fig. 26

EP 0 757 635 B1

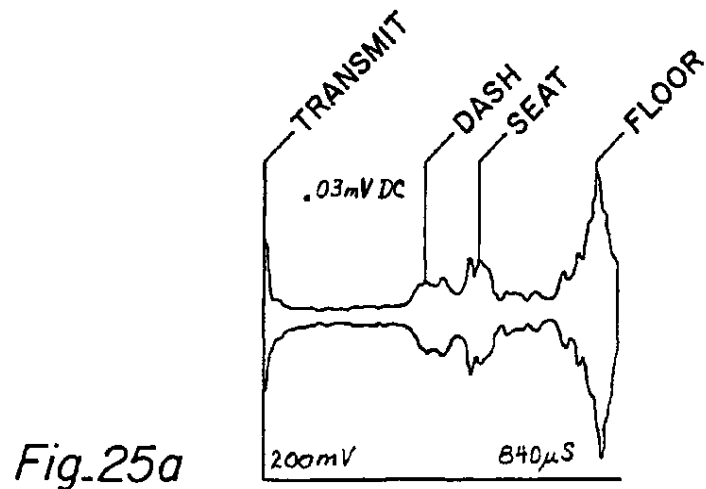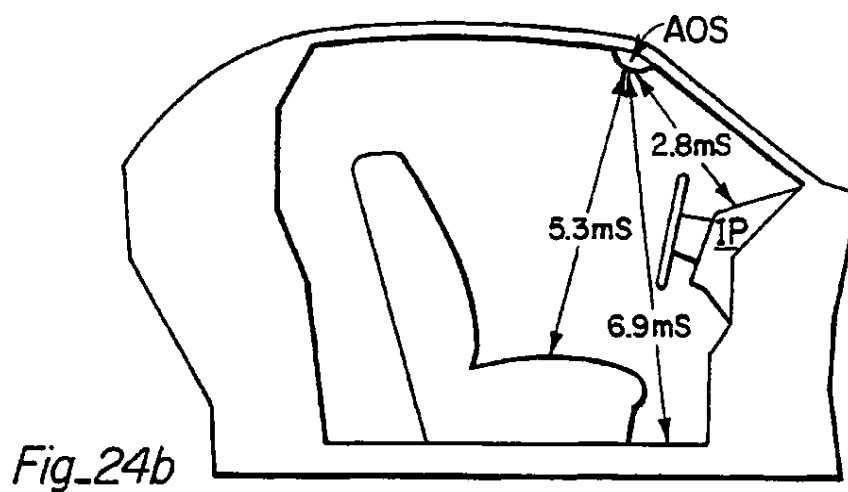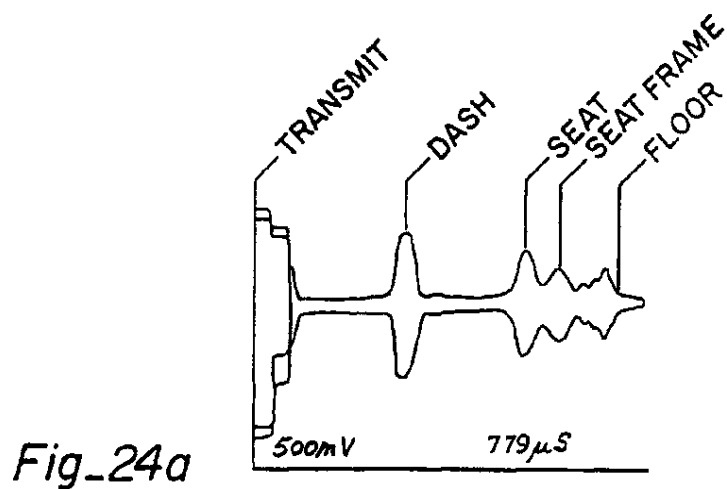

EP 0 757 635 B1


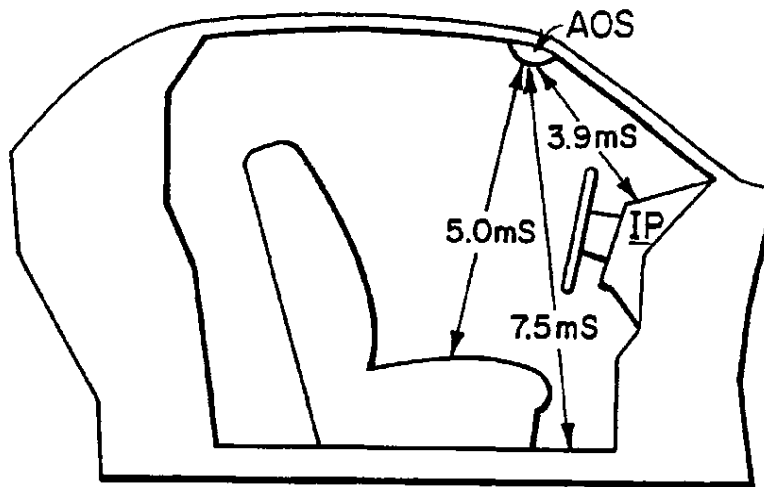


Fig.25b

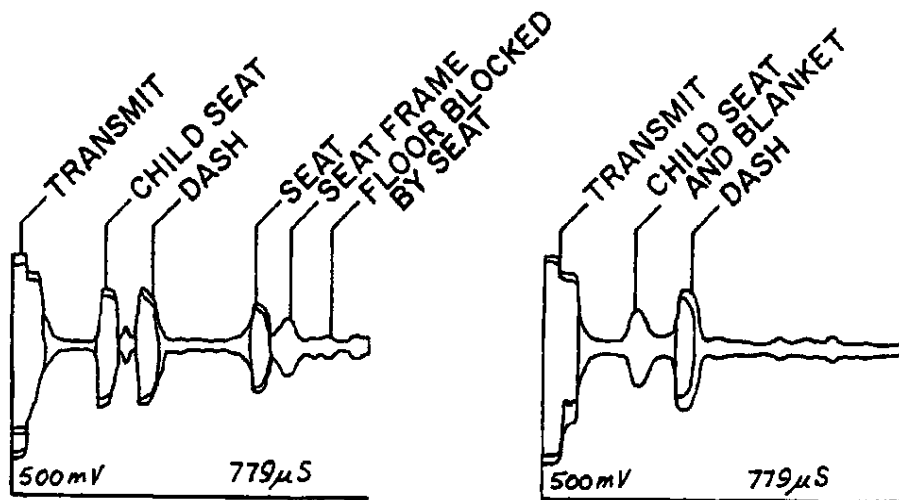

VEHICLE: 93 LH  
SENSOR: P-1 OVERHEAD  
STATUS: RFCS

AIR TEMPERATURE: 22.6°C  
SURFACE TEMPERATURE: 25°C

Fig.27a

VEHICLE: 93 LH  
SENSOR: P-1 OVERHEAD MOUNT  
STATUS: RFCS UNDER 2 BLANKETS

AIR TEMPERATURE: 22.6°C  
SURFACE TEMPERATURE: 25°C

Fig.27b

EP 0 757 635 B1

